

Pro-Tekt Runner

#820

Dry Area

Runner



Performance Rating ★★☆☆

FEATURES

- Lightweight and flexible, allowing for easy movement for the runner
- Low-profile design minimizes trip hazards

SPECIFICATIONS

Standard Roll Sizes: 3' x 60', 4' x 60', 6' x 60'

Customization: Custom Cut Length up to 60'

Thickness: 1/8"


Color Available - Black only

Pebble
Surface



Technical Data

- Material: Solid extruded vinyl
- Surface: Pebble surface
- Average Density: 40 - 45 lbs./ft³
- Average Durometer: 70 - 80 ASTM D-2240
- Taber Abrasion: < 1.0% loss wheel H-38, 2000 rev. per ASTM D-4060

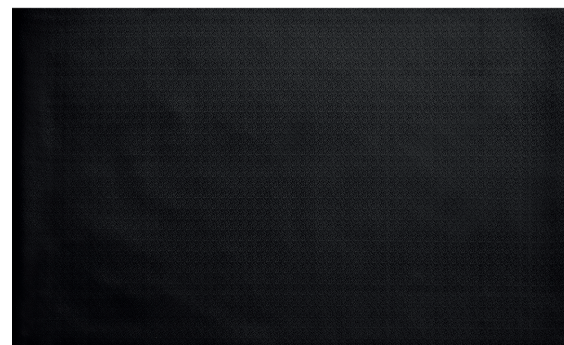

Applications: factories, finishing and assembly stations, churches, warehouses, stock rooms and storage areas



Pro-Tekt Runner offers slip resistance and chemical resistance, ensuring floor protection at an affordable price.

WARRANTY
Total Confidence

