

Wear-Bond Tuff-Spun

#520-#522

Dry Area

Anti-Fatigue



Performance Rating ★★★★★

FEATURES

- Durable abrasion-resistant vinyl top bonded to a low-density PVC sponge
- Exclusive Fusion technology bonds layers together without the use of adhesives
- Excellent puncture-resistant surface

SPECIFICATIONS

Standard Sizes: 2' x 3', 3' x 5', 3' x 12', 4' x 6', 4' x 12'

Roll Sizes: 2' x 75', 3' x 75', 4' x 75'

Thickness: 9/16"

Total Customization: 2', 3', 4' widths



Profile




Black, Black & Yellow, Gray

Technical Data

- Product Material: Heavy duty top over low density vinyl foam
- Tabor Abrasion: ≤ 4 gram
- Resiliency: $\geq 32\%$ per ASTM-D-2632
- Product Weight: 7.2 lbs. per sq. yd.
- Compression: .17 @ 7 psi per ASTM D1667



Diamond Emboss or Pebble Emboss Surface

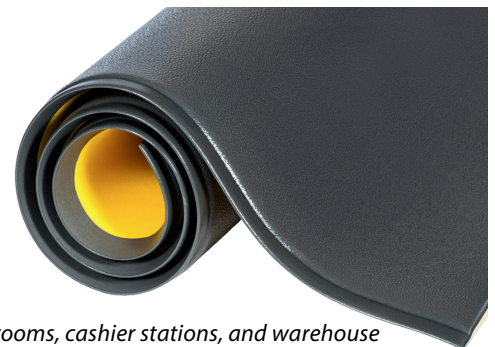

Applications: service counters, mail rooms, cashier stations, and warehouse packaging stations.

Crown's Wear-Bond Tuff-Spun offers a cost-effective, comfortable, and durable solution. Its sturdy vinyl top provides a safe, non-slip surface, minimizing fall risks and ensuring longevity.



Visit us @ crownmats.com or call-1-800-MAT-LINE
2100 Commerce Drive, Fremont, Ohio 43420

WARRANTY
Total Confidence



Anti-Fatigue

75%

Durability

80%

Traction

75%