
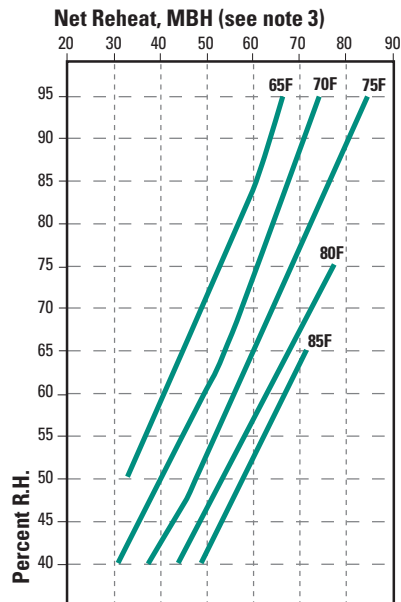


**DCA3300 STANDARD DEHUMIDIFIER**

**DCA3300WH WATER HEATING DEHUMIDIFIER**

**PERFORMANCE**

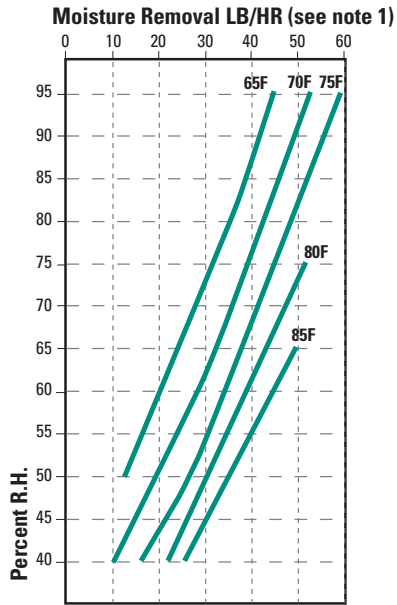

**FEATURES**

- MET Laboratory Safety Listed To UL 1995
- 3 Year Parts Warranty
- Remote Condenser Ready
- Rifle Tube Refrigeration Coils
- Copeland Scroll Compressor
- Stainless Steel Condensate Drain Pan
- Low Ambient Head Pressure Control
- Powder Coated, Galvannealed Steel Cabinets
- TEFC Blower Motor
- Many Control Systems Available
- Many Make Up Air Provisions Available
- Water Cooled Condenser For Water Heating Or A/C Available
- Many Other Options Available


Performance	82DB / 50% R.H.	82DB / 60% R.H.	Notes
Moisture Removal LB/HR	32.9	41.6	1
Sensible Cooling, MBH	51.3	46.7	2
Net Reheat, MBH	56.2	66.2	3
Water Heating MBH	109.6	114.9	4

**Notes:**

1. Reheat mode assuming 1050 BTU/lb.
2. Cooling mode with remote air cooled condenser at 95.
3. Defined as sum of latent and compressor input. Use Dehumidifier for supplemental heat only.
4. Assuming 80F entering water temperature.
5. For conditions and data not shown contact the FAC.

# DCA3300 STANDARD DEHUMIDIFIER DCA3300WH WATER HEATING DEHUMIDIFIER

## DIAGRAMS

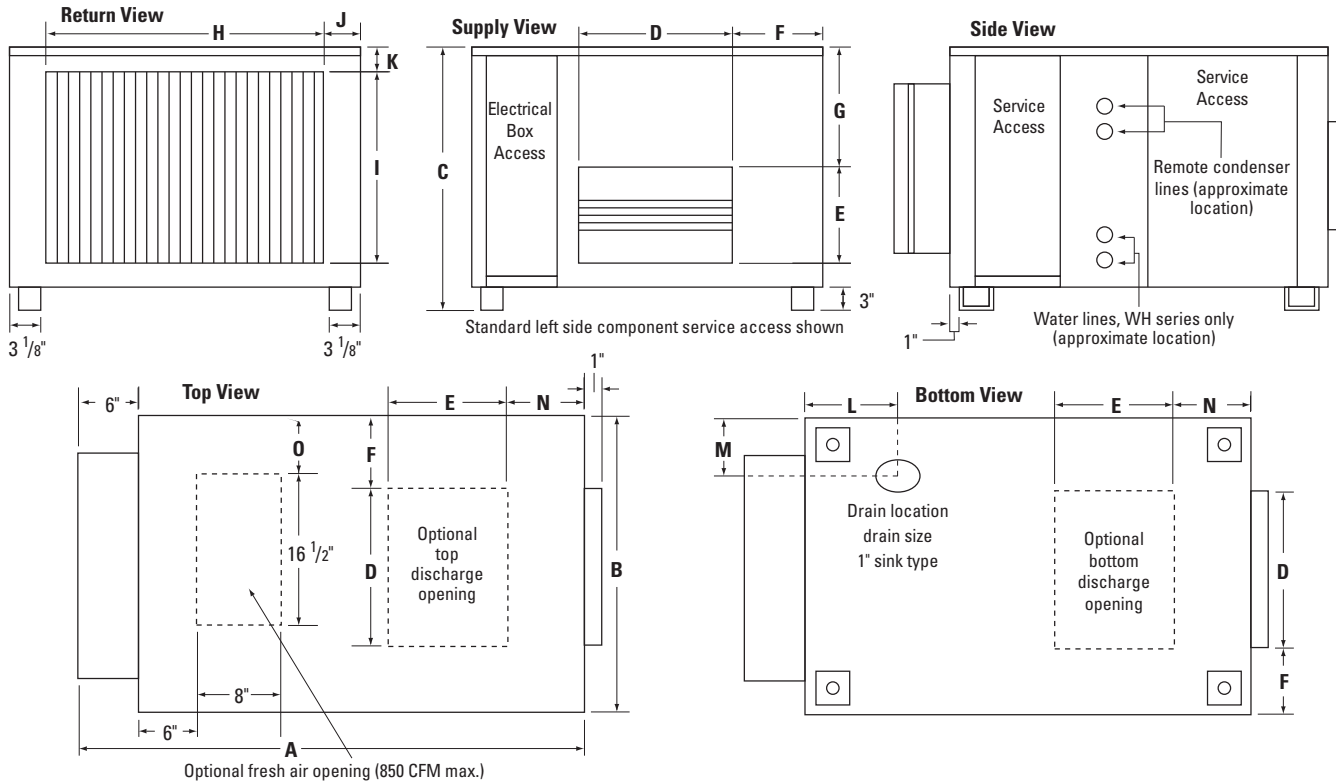

## PHYSICAL DIMENSIONS

	DCA3300	DCA3300WH		DCA3300	DCA3300WH		DCA3300	DCA3300WH		DCA3300	DCA3300WH		DCA3300	DCA3300WH
A	66	71	D	18 5/8	18 5/8	G	3	4	J	4	4	M	5	5
B	45	55 1/4	E	16	16	H	40	50	K	5 1/2	2	N	8 1/2	8 1/2
C	34 1/2	49	F	7	7	I	25 1/8	40 1/4	L	12	13	O	6	4

## DESIGN SPECIFICATIONS

Electrical	208/230V	460V	575V
Phase/Hz	3/60	3/60	3/60
Compressor B.T.U.	88,800	88,800	88,800
Compressor RLA	27.2	14.3	10.1
Compressor LRA	189	99	74
Blower Motor H.P.	2.0	2.0	2.0
Blower Motor FLA	6.2	3.1	2.5
Unit FLA	34.9	18.2	13.3
Maximum Fuse Size	60	30	20
Minimum Circuit Ampacity	41.7	21.8	15.8
Operating kW	8.45	8.45	8.46

M.R. (82°F/50%)	32.9 lbs./Hr.	Drain Connection	1" Bar Drain
M.R. (82°F/60%)	41.7 lbs./Hr.	DCA3300 Weight	1250 lbs.
CFM	3500	DCA3300WH Weight	1350 lbs.
External Static Pressure	0.50" H <sub>2</sub> O	Water Inlet O.D.	1 3/8"
Refrigerant	R-22 (Factory Charged-40 lbs.)	Water Outlet O.D.	1 3/8"
Compressor Type	Scroll	Water Flow G.P.M.	15.0
Filter	1" Fiberglass	Pressure Drop (Ft. Wc)	0.82

Above data based on 50% RH + Return Air 82°F and Pool Water at 80°F

## OTHER INFORMATION

### OPTIONS: (Consult Factory)

- Right Side Component Access
- Outdoor Air Assembly with Damper & Filter Make Up
- Motorized Bypass Damper
- Top or Bottom Discharge
- Extended Surface Filters 2" & 4"
- External Static Upgrade
- Remote Ready Delete
- Outdoor Installation Package
- Heresite Coated Coils
- Defrost Timer Package
- Other

CAUTIONS: The reheat capacity rating includes latent recovery and heat of compression. It is recommended that dehumidifiers be used for supplemental heat only.

The cooling capacity is based on an ambient temperature of 95°F. As outside conditions vary, so will the performance of the dehumidifier.

Ratings are subject to change without notice.

W53 N550 HIGHLAND DRIVE  
P.O. BOX 0917  
CEDARBURG, WI 53012  
PHONE: 262-377-7501  
FAX: 262-377-7502  
E-MAIL: info@dehumidifiercorp.com

**DCA** DEHUMIDIFIER  
CORPORATION  
OF AMERICA

WEBSITE: [www.dehumidifiercorp.com](http://www.dehumidifiercorp.com)