
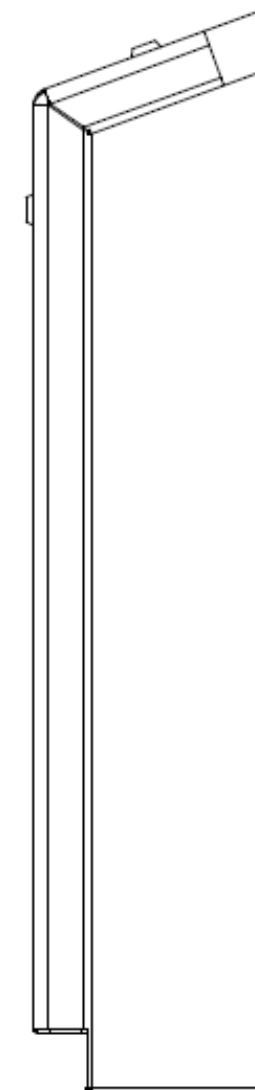


**Please note:** The grille size used in an IP3x anti-ligature radiator guard can inhibit the convection process. Therefore Contour cannot guarantee that the casing will not exceed a surface temperature of 43 degrees Centigrade.

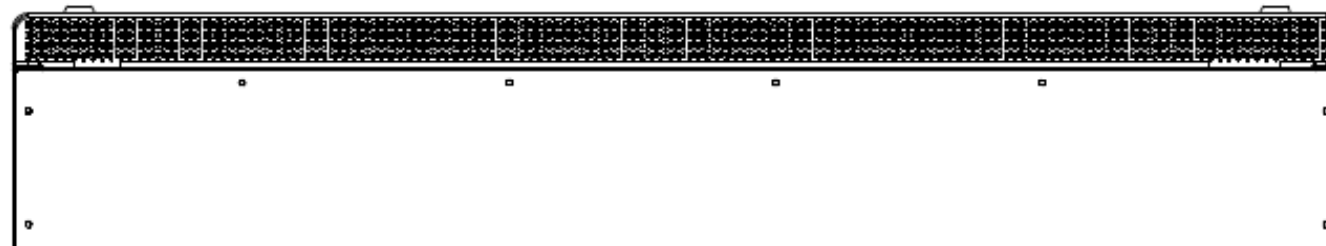

**Type:**  
DeepClean Extra IP3x Compliant Anti-Ligature Radiator Guard Grille With Added Frame Allowing For Installation on Uneven Walls

**Model:**  
Gradient Top - Floor Mounted

**Manufacture:**  
1.5mm - 3mm Zintec Steel. Magnelis Steel for Wet environments  
10mm Radius Corners. Full Height Front Access Door Available (Depending on Installation Environment - Pat. No. 2 410 544) IP3x Test (To BS EN 60529) Compliant Guard Grille, Incorporating 2mm holes at 4mm Centres in Triangular Pitch Formation. Complies with Home Office Police Buildings Design Guide – Custody, July 2009, section PD3.02.14

**All Apertures:**  
Cut-Outs Programmed into Manufacture  
28mm Valve Knockouts Available

**Sizes:**  
Single Casing Length 500mm - 2000mm.  
Single Casing Height 580mm - 995mm  
Bespoke Solutions Available

**Finish:**  
Polyester Powder Coated RAL 9003  
Patented BioCote® Anti-Microbial Agent

**Valve Options:**  
Internal TRV Kit 9210-13  
External TRV Kit 19330-41  
Remote Sensing TRV Kit 7463-41  
Anti-Ligature TRV Kit & Shroud 19352-41  
"RotaRad" Rotating Valve Kit

**Fixings:**  
All Fixings Internal  
Guard Door Secured With PinHex Quarter Turn Locks

Contour Heating Products Ltd  
The Mansions, 43 Broadway,  
Shifnal, Shropshire,  
TF11 8BB  
Tel: 01952 290498  
Email: sales@contourheating.co.uk  
Web: www.contourheating.co.uk