
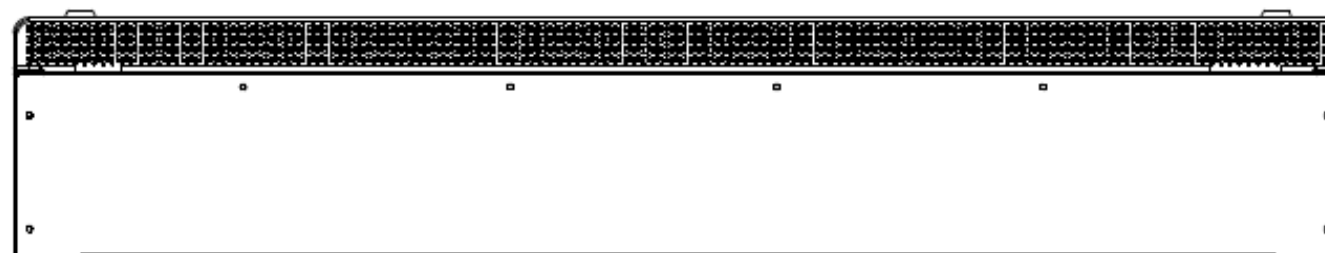
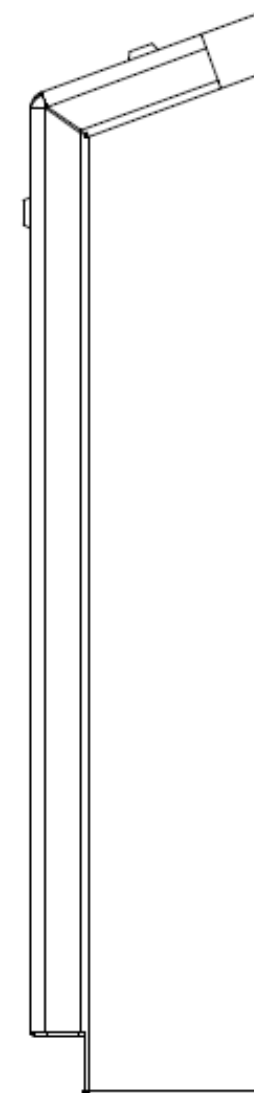


Please note: The grille size used in an IP3x anti-ligature radiator guard can inhibit the convection process. Therefore Contour cannot guarantee that the casing will not exceed a surface temperature of 43 degrees Centigrade.

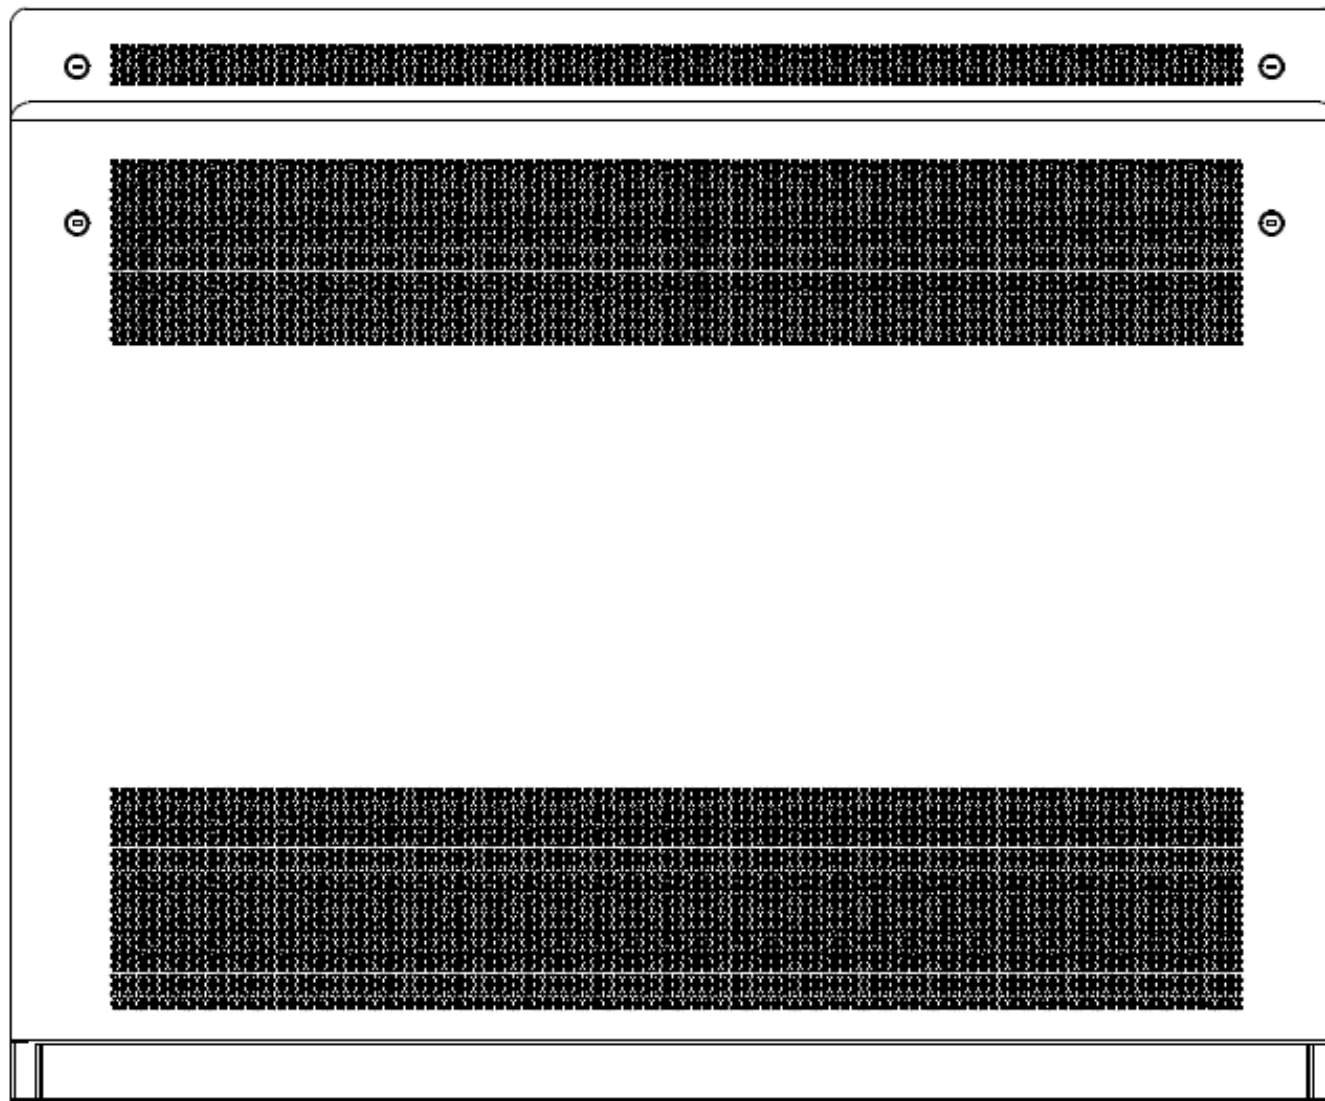

Type:
DeepClean Extra IP3x Compliant Anti-Ligature Radiator Guard Grille With Added Frame Allowing For installation on Uneven Walls

Model:
Gradient Top - Wall Mounted

Manufacture:
1.5mm - 3mm Zintec Steel. Magnelis Steel for Wet environments
10mm Radius Corners. Full Height Front Access Door Available (Depending on Installation Environment - Pat. No. 2 410 544) IP3x Test (To BS EN 60529) Compliant Guard Grille, Incorporating 2mm holes at 4mm Centres in Triangular Pitch Formation. Complies with Home Office Police Buildings Design Guide – Custody, July 2009, section PD3.02.14

All Apertures:
Cut-Outs Programmed into Manufacture
28mm Valve Knockouts Available

Sizes:
Single Casing Length 500mm - 2000mm.
Single Casing Height 480mm - 895mm
Bespoke Solutions Available

Finish:
Polyester Powder Coated RAL 9003
Patented BioCote® Anti-Microbial Agent

Valve Options:
Internal TRV Kit 9210-13
External TRV Kit 19330-41
Remote Sensing TRV Kit 7463-41
Anti-Ligature TRV Kit & Shroud 19352-41
"RotaRad" Rotating Valve Kit

Fixings:
All Fixings Internal
Guard Door Secured With PinHex Quarter Turn Locks

Contour Heating Products Ltd
The Mansions, 43 Broadway,
Shifnal, Shropshire,
TF11 8BB
Tel: 01952 290498
Email: sales@contourheating.co.uk
Web: www.contourheating.co.uk