
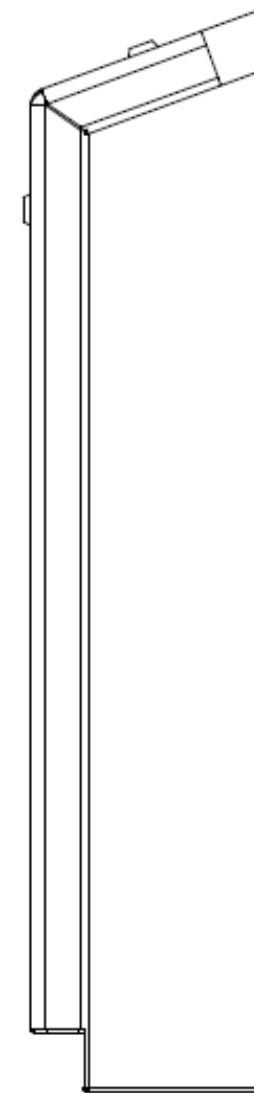


Please note: The grille size used in an IP3x anti-ligature radiator guard can inhibit the convection process. Therefore Contour cannot guarantee that the casing will not exceed a surface temperature of 43 degrees Centigrade.

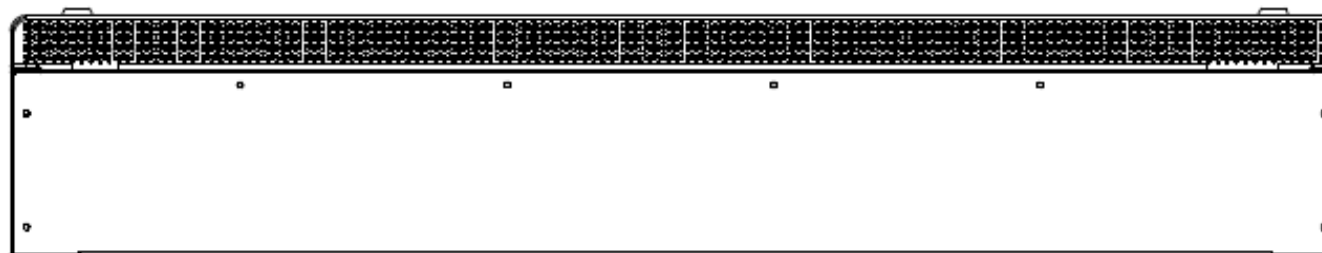

Type:
 DeepClean Extra IP3x Compliant Anti-Ligature Grille Radiator Guard With Added Frame Allowing For Uneven Walls

Model:
 Gradient Top - Wall Mounted

Manufacture:
 1.5mm - 3mm Mild Steel (Depending on Installation Environment)
 10mm Radius Corners
 Full Height Front Access Door Available (Depending on Installation Environment - Pat. No. 2 410 544)
 IP3x Test (To BS EN 60529) Compliant Guard Grille, Incorporating 2mm holes at 4mm Centres in Triangular Pitch Formation. Complies with Home Office Police Buildings Design Guide – Custody, July 2009, section PD3.02.14

All Apertures:
 Cut-Outs Programmed into Manufacture
 28mm Valve Knockouts Available

Sizes:
 Single Casing Length 500mm - 2000mm.
 Single Casing Height 480mm - 895mm
 Bespoke Solutions Available

Finish:
 Polyester Powder Coated RAL 9003
 Patented BioCote® Anti-Microbial Agent

Valve Options:
 Internal TRV Kit 9210-13
 External TRV Kit 9231-41
 Remote Sensing TRV Kit 7463-41
 Anti-Ligature TRV Kit & Shroud 9213-63
 "RotaRad" Rotating Valve Kit

Fixings:
 All Fixings Internal
 Guard Door Secured With PinHex Quarter Turn Locks

Contour Heating Products Ltd
 Stafford Park 10
 Telford
 TF3 3AT
 Tel: 01952 290498
 Email: sales@contourheating.co.uk
 Web: www.contourheating.co.uk