

ChemLINE[®] TC

Thermal Cycling



A protective lining for superior corrosion and high temperature resistance with exceptional flexibility and toughness.

Description

ChemLINE[®] TC (Thermal Cycling) coating is a specially formulated polymer coating for handling the high temperature and abrasion requirements of the power industry. ChemLINE[®] TC is a two-component force cure system that offers unique characteristics. ChemLINE[®] TC is a cross linked organic-inorganic multifunctional polymer coating that is cured through homopolymerization. This dense cross linked polymer exhibits high flexibility and toughness, having no detrimental hydroxyl or ester groups. In addition to ChemLINE[®] TC's temperature resistance of 400°F (204°C), it provides superior resistance to:

- ▶ Acids, alkalis, solvents, oxidizing agents
- ▶ Good wear and abrasion resistance
- ▶ Impact resistance
- ▶ Thermal cycling -40°F (-40°C) to 400°F (204°C)

Industry Applications

- ▶ Stacks
- ▶ Chimneys
- ▶ Ducts
- ▶ Flue gas desulfurization scrubbers
- ▶ Chemical scrubbers
- ▶ Pre-scrubbers
- ▶ Spray towers
- ▶ Fans



Application Highlights

- ▶ Excellent resistance to hot flue gas condensate
- ▶ Resists fly ash abrasion
- ▶ Low coefficient of thermal expansion
- ▶ Smooth, low surface energy reduces fly ash build-up in ducts and stacks
- ▶ Can be applied to pitted corroded steel
- ▶ Low VOC - 134 grams/L (1.11 lbs. per gallon)
- ▶ Outstanding flexibility
- ▶ Resists hydroblasting
- ▶ Field repairable
- ▶ Coefficient of thermal expansion comparable to stainless steel
- ▶ Dry heat resistance up to 500°F (260°C)


Typical Properties (mixed, as supplied)

- ▶ Stock Colors _____ White
- ▶ VOC Level _____ 134 grams/L (1.11 lbs./gal.)
- ▶ Pot Life _____ 120 minutes @ 75°F (24°C)
- ▶ Viscosity Reduction _____ Reduce with Toluene or Xylene
- ▶ Solids by Volume _____ 85%
- ▶ Recommended Film Thickness (dry) mils average
_____ Steel: 16 mils (400 microns)
_____ Concrete: 24 mils (600 microns)
- ▶ Shelf Life _____ 12 months

For product recommendations and technical, application and heat curing information contact Advanced Polymer Coatings' customer service. Contact +1 440-937-6218.



Typical FGD Schematic (non-denominational) Showing Various Lining Zones for ChemLINE® TC

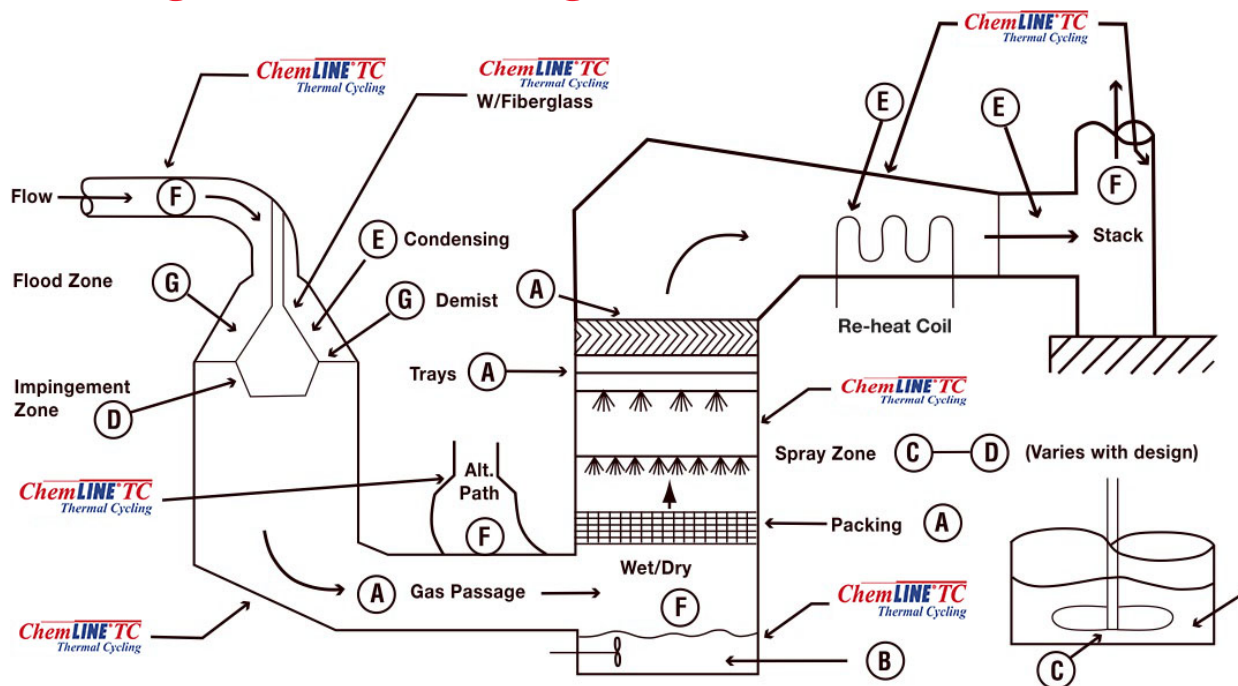


Explanation of Above Codes Used to Define Living Environment

Code	(1) Corrosion	(2) Erosion	(3) Temperature	Recommendation
A	Mild Corrosive (Vapor)	Mildly Abrasive	High	ChemLINE® TC
B	Moderate (Immersion)	Mild	Mild	ChemLINE® TC
C	Moderate	Moderate	Mild	ChemLINE® TC
D	Moderate	Severe	Mild	ChemLINE® TC
E	Severe	Mild	Moderate	ChemLINE® TC
F	Severe	Mild	Severe	ChemLINE® TC
G	Severe	Severe	Severe	ChemLINE® TC

- Key**
- 1) Corrosion - Mild 30% to 80% Sulfuric Acid (Severe)
 - 2) Erosion - High Energy Fly Ash Particles
 - 3) Temperature - Mild 200°F (93°C) to 350°F (177°C) (Severe)

The information contained in this brochure is intended to show the broad range of applications where Advanced Polymer Coatings' products have been used. This brochure is not an offer to sell any product. The information provided is not a warranty that Advanced Polymer Coatings' products are suitable for any specific service condition. All products sold by Advanced Polymer Coatings come with a warranty that the product supplied is suitable for the service condition disclosed by the customer prior to sale when properly applied. Advanced Polymer Coatings will not warrant the quality of the application work performed by others and shall have no liability for in service product failures resulting from improper application. Advanced Polymer Coatings offers a range of products for different service conditions. In the event a product supplied by Advanced Polymer Coatings is shown to be inadequate for the customer's conditions of service, Advanced Polymer Coatings shall, in its discretion, provide an alternative product or refund the purchase

price and freight charges it received for the product. The replace or refund warranty given at the time of sale is the sole and exclusive warranty provided by Advanced Polymer Coatings. ALL IMPLIED WARRANTIES ARE DISCLAIMED, INCLUDING WITHOUT LIMITATION, THE IMPLIED WARRANTY OF MERCHANTABILITY AND THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. The products sold by Advanced Polymer Coatings are not intended for personal or household use. Advanced Polymer Coatings' products should only be used by professional applicators who have familiarized themselves with the written Manufacturer Safety Data Sheets and Application Guidelines available at www.adv-polymer.com. © 2018 1121



**ADVANCED
POLYMER COATINGS**

Advanced Polymer Coatings
Avon, Ohio 44011 U.S.A.
+1 440-937-6218 Phone
+1 440-937-5046 Fax
800-334-7193 Toll-Free USA & Canada

www.adv-polymer.com

TOMORROW'S SOLUTIONS TODAY