The B9Creator™

Copyright 2012 B9Creations, LLC All Rights Reserved

Visual Assembly Guide

Step 1 - Projector Support (PS) Assembly




Completed Projector Support (PS) Assembly (Feet not shown)

View an online video of Step 1 - Projector Support Assembly

Feet Assembly



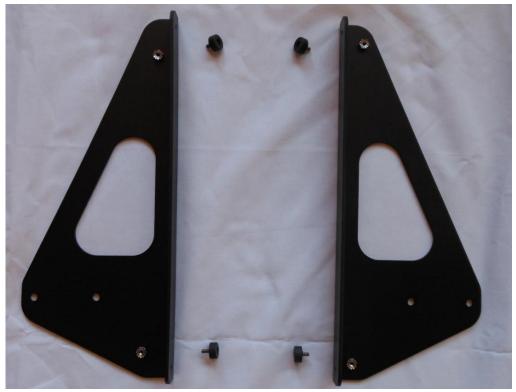





Completed Feet Assembly

After completing the feet, set them aside for use during the final assembly.


Projector Support Assembly



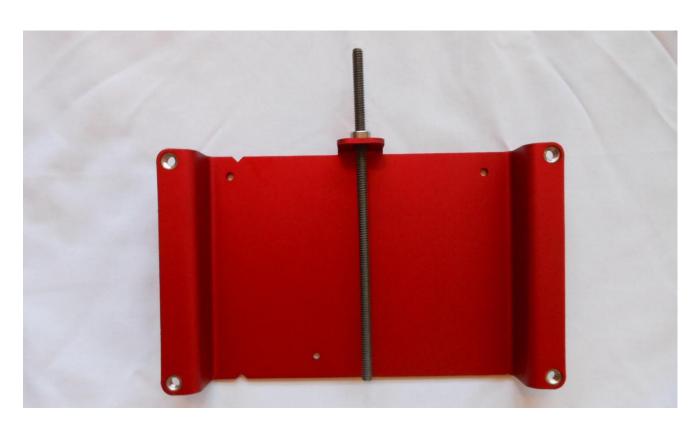

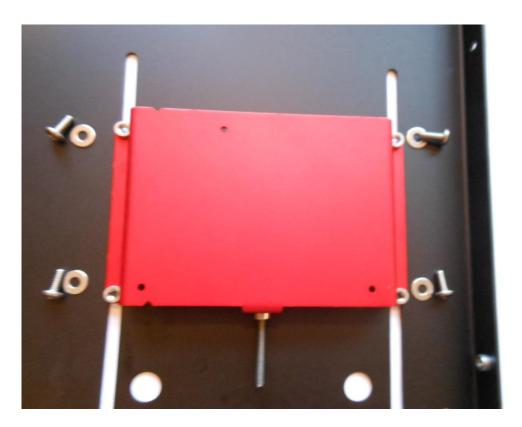


Front View

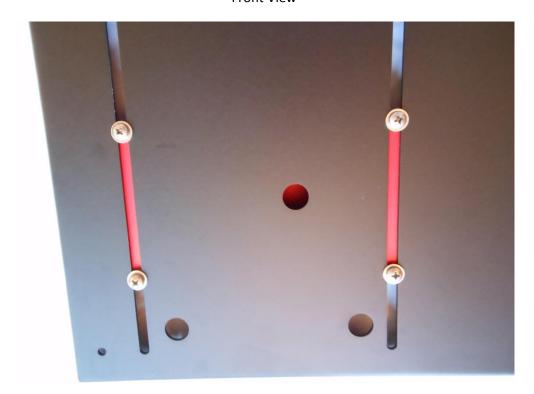


Back View

NOTE: Do not tighten these four screws. They will be secured after calibration.

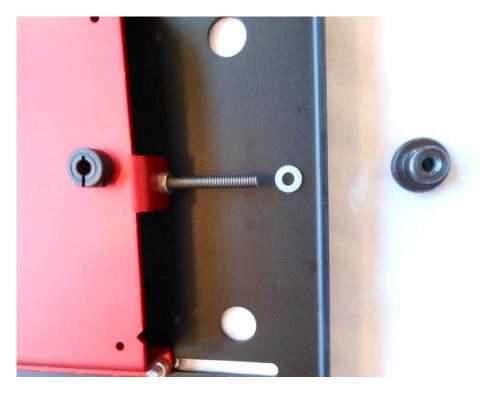

Original shaft collar shown - Alternate aluminum collar is also OK.

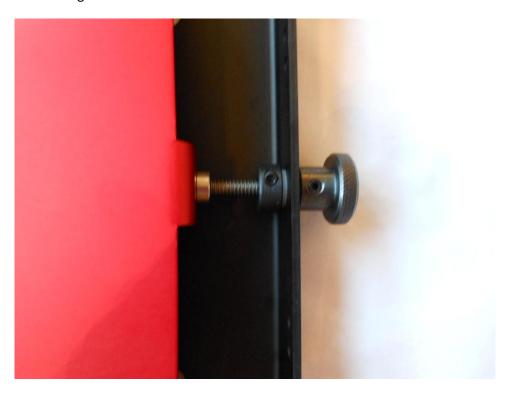

Tighten both hex screws. Turning knob should now allow for projector mount adjustment. Turn the knob to align the three Projector mounting holes with the three larger holes in the backplane before proceeding to the next step.



Locate the projector, SA07 and Projector control harness



Use the three SA07 screws to attach projector to slide mount as shown



Attach the Projector control harness to the Projector's RS-232 port, feed the cord under the mount.



After completing the PS Assembly, set it aside for use during the final assembly.