

Copyright 2013 B9Creations, LLC All Rights Reserved

Visual Assembly Guide, v1.1


Step 1 - Projector Support (PS) Assembly



Completed Projector Support (PS) Assembly (Feet not shown)

Feet Assembly



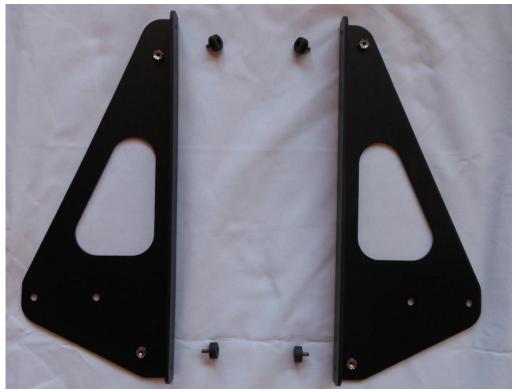




Completed Feet Assembly

After completing the feet, set them aside for use during the final assembly.


Projector Support Assembly





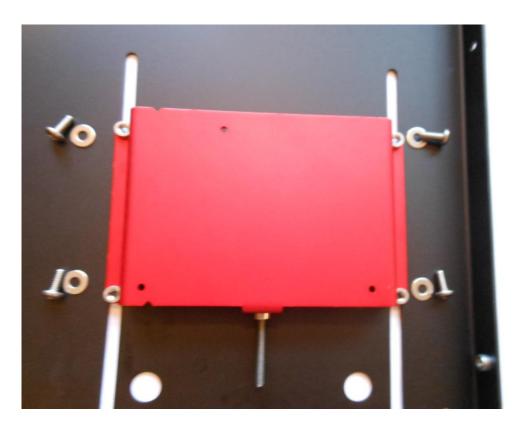



Front View

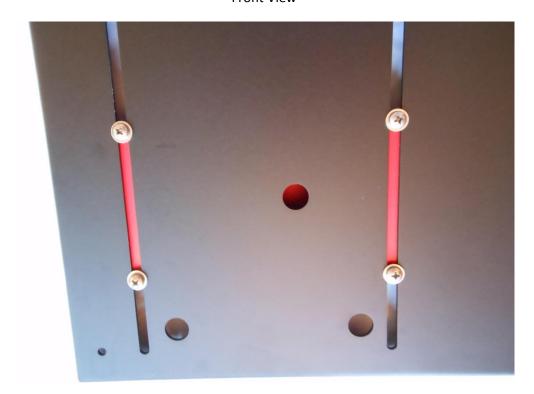

Back View

NOTE: Do not tighten these four screws. They will be secured after calibration.

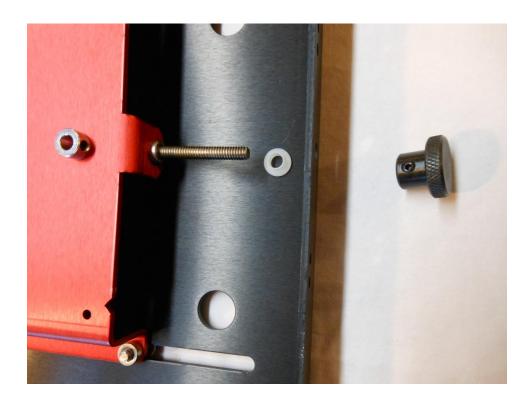

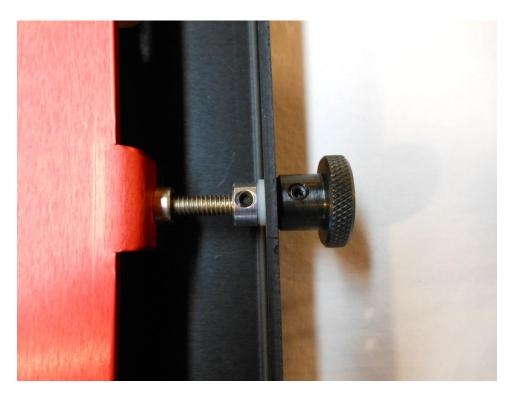

Tighten both hex screws. Turning knob should now allow for projector mount adjustment. Turn the knob to align the three Projector mounting holes with the three larger holes in the backplane before proceeding to the next step.



Locate the projector, SA07 and Projector control harness



Use the three SA07 screws to attach projector to slide mount as shown



Attach the Projector control harness to the Projector's RS-232 port, feed the cord under the mount.



After completing the PS Assembly, set it aside for use during the final assembly.