

MYPERINI



AVAILABLE VERSIONS

MYSINCRO | Up to **30 log/min**
Max roll Ø **160 mm**
Speed **450 m/min**

MYLINE | Up to **40 log/min**
Max roll Ø **200 mm**
Speed **600 m/min**

Pro

Flexy

WITH DESL EMBOSSER

WITH CATALYST EMBOSSER

MYTIME | Up to **60 log/min**
Max roll Ø **200 mm**
Speed **800 m/min**

Pro/1 (40 log/min)

Flexy/1 (40 log/min)

WITH DESL EMBOSSER
1 LOG SAW

WITH CATALYST EMBOSSER
1 LOG SAW

Pro/2 (60 log/min)

Flexy/2 (60 log/min)

WITH DESL EMBOSSER
2 LOG SAW

WITH CATALYST EMBOSSER
2 LOG SAW

MYPACK | Up to
200 packs/min
20 bundle/min



MYPERINI

COMPLETE TURNKEY
CONVERTING & PACKAGING SOLUTIONS



© Fabio Perini - GB - 00/10/17



MYPERINI is a family of lines created for customers who require complete converting and packaging solutions from 450 m/min to 800 m/min.

Designed to meet most production demands, these solutions represent the perfect balance for optimizing TCO (Total Cost of Ownership) and for achieving the best OEE (Overall Equipment Effectiveness).

MYPERINI lines are available in several versions. They all include the consolidated “Sincro” transfer system and, depending on the model and version, the patented winding system with active Punzoncini and Catalyst technology for the embosser.

All lines can be completed by including the **MYPACK** offer for packaging up to 200 packs/min and 20 bundles/min.

CHOOSE YOUR LINE

MYPERINI

MYSINCRO

Up to **30 log/min**
Max roll Ø **160 mm**
Speed **450 m/min**

MYLINE


Up to **40 log/min**
Max roll Ø **200 mm**
Speed **600 m/min**

MYTIME

Up to **60 log/min**
Max roll Ø **200 mm**
Speed **800 m/min**

MYPACK

Up to **200 packs/min**
e **20 bundles/min**

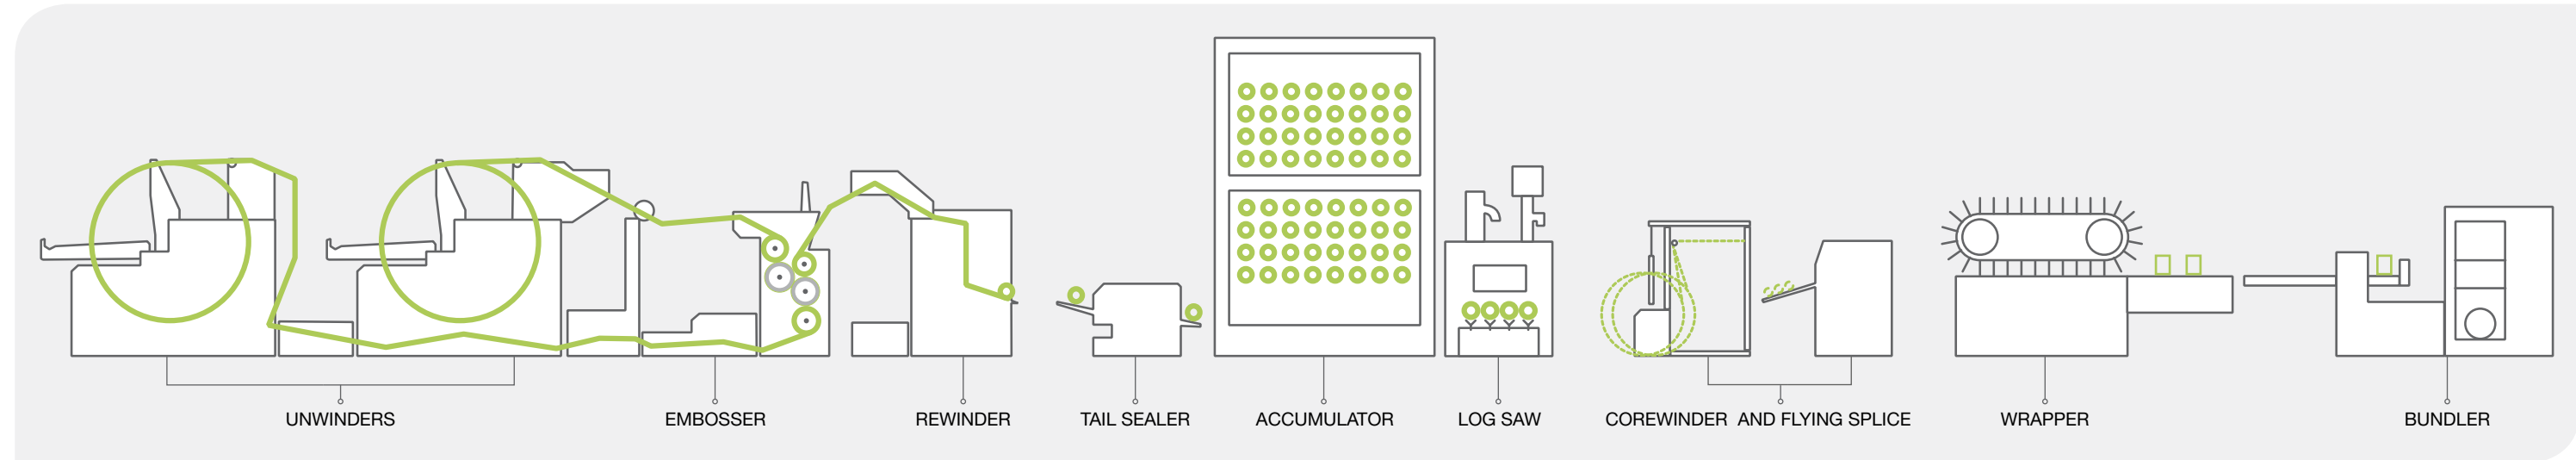

WHY MYPERINI?



- Reduced lead Time
- Faster start-up
- Quicker time-to-market



- Balanced configuration
- Easy to use for operators
- Reduced line footprint



- Proven technology
- Upgrades for longer lifecycle
- All aftermarket services

TECHNICAL CHARACTERISTICS		MYSINCRO	MYLINE	MYTIME
PARENT REEL	max Ø		2500 mm	
	max weight		3000 kg	5000 kg
EMBOSSER	Products	Desl and Deco	Desl, Deco and Tip-to-Tip (*)	
	Steel rolls Ø		409 mm	500 mm
	Safety and ergonomics		Retractable gluing unit	
	Catalyst (*)	NO	Automatic replacement of both steel rolls from the warehouse (6 rolls total) Roll extraction from the warehouse with line running (optional)	
REWINDER	Transfer system	Sincro		Sincro evo - active "Punzoncini"
	Core infeed		Overhead	
	Perforation	Double - 4- and 6-blade rolls Fixed 4-blade roll with axial shift		Double - 6- or 8-blade rolls (2nd roll optional) Fixed 4-blade roll with axial shift
TAIL SEALER	Core gluing		Blade	
	Gluing		Blade	
ACCUMULATOR	By-pass	Infeed	Infeed and outfeed	
	Continuous loading	NO	Included	
LOG SAW	Log transport	Unloading selectable on 4 lanes - continuous pusher movement		
	Trimex	mechanical "Trimeasy"		
	Grinding dust vacuum system	Optional	Included	
ALL IN ONE		NO	Converting + packaging (optional)	
MYPACK				
WRAPPER	Winding material	PE, ecological material, Mater-bi, and similar 18-50 micron		
	Folders	UNI		
BUNDLER	Winding material	PE, ecological material, Mater-bi, and similar 40-60 micron		
	Versatility	Bar code; print centering unit		

(*) only "Flexy" version