




PAR-ALLDRXIRA27135BD

5 Megapixel TVI/AHD/CVI/Analog Outdoor Dome with Internal Built-in Balun & BNC, Motorized A/F 2.7-13.5mm, 98' IR Range, D-WDR, Dual Voltage

Features

- 5 Megapixel Resolution (TVI/AHD)
4 Megapixel Resolution (CVI)
- All-in-One Technology (TVI/AHD/CVI/Analog 960h)
- Motorized Auto-Focus 2.7-13.5mm Lens
- True Day/Night
- D-WDR
- 98' Smart IR Range
- Up The Cable (UTC) Function
- IK10 Vandal Resistant
- IP67 Weather Resistant
- Internal Built-in Balun and BNC, without Camera Leads
- Built-in 12vDC Output, 100mA Max
- Dual Voltage
- Through InVid Tech DVR: Free App, CMS & MAC Client

Camera	PAR-ALLDRXIRA27135BD
Filter	Removable IR Cut Filter
Image Sensor	1/2.7" 5M Progressive Scan CMOS
Pixels	2688(H)×1944(V)
Horizontal Resolution	5MP
Minimum Lux	0Lux (when 4pcs high power LED on)
Vertical Frequency	NTSC:60Hz PAL:50Hz
Scanning System	Progressive
S/N Ratio	≥50dB
Electronic Shutter	NTSC:1/60-1/60,000S PAL:1/50-1/50,000S
Lens	2.7-13.5mm Motorized AF IR Lens
White Balance	ATW
AUTO Gain Control	ON
DNR	OFF/ON
Day&Night	AUTO/Color/BW/Ext
Available IR Distance	98ft
Video Output	TVI/AHD: 5MP @20fps, 4MP @ 30fps CVI: 4MP @30fps CVBS
Video Output By Default	TVI
IP Rating	IP67 4.5-5.5 mm external wiring
Housing	IK10
Power Supply	DC12V & AC24V
Current consumption	DC12V: 550mA(MAX) / AC24V: 230mA(MAX)
Dimension	Φ5.96" ×4.30" (151.4×109.3mm)
Weight	1300g (42.33oz)
Storage Temperature	-22°F ~ 140°F (-30°+60°C)
Operating Temperature	-22°F ~ 104°F (-30°+40°C)

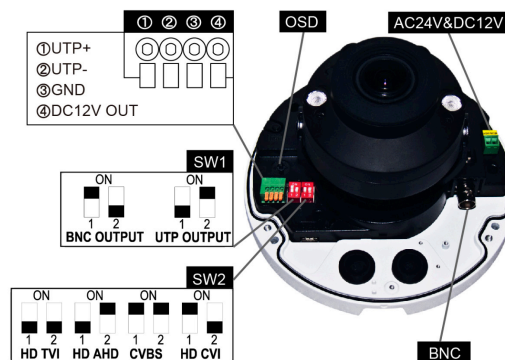

Ordering Information

PAR-ALLDRXIRA27135BD: 5 Megapixel, 2.7-13.5mm