


ITH High-pressure pump unit

Hydromax - Type 18 - Protective Cage

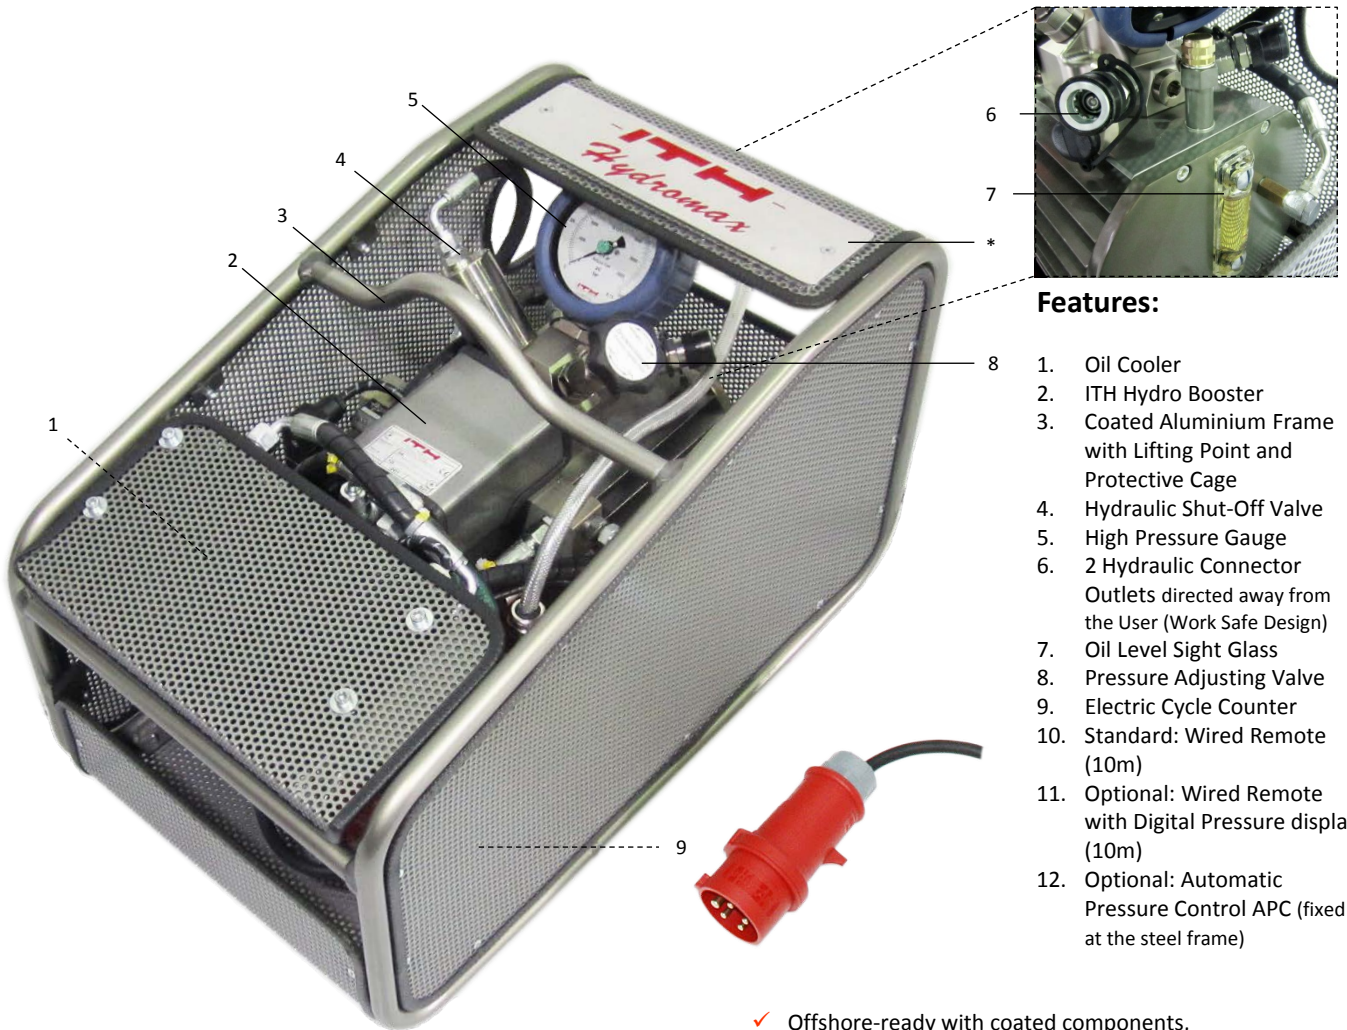

Features:

1. Oil Cooler
2. ITH Hydro Booster
3. Coated Aluminium Frame with Lifting Point and Protective Cage
4. Hydraulic Shut-Off Valve
5. High Pressure Gauge
6. 2 Hydraulic Connector Outlets directed away from the User (Work Safe Design)
7. Oil Level Sight Glass
8. Pressure Adjusting Valve
9. Electric Cycle Counter
10. Standard: Wired Remote (10m)
11. Optional: Wired Remote with Digital Pressure display (10m)
12. Optional: Automatic Pressure Control APC (fixed at the steel frame)

- ✓ Offshore-ready with coated components, coated Aluminium Frame and coated Protective Cage
- ✓ Easy and worksafe operation
- ✓ Designed for service jobs and high cycle life

Technical Data:

Order-No.	34.x4318- Motor-ID			
Type	1813	1815	1825	
Druck max. [bar]	1350	1500	2500	
Dimensions (LxWxH)	620 x 360 x 400mm			
Weight	43,1 kg (without Oil 38,5 kg)			
Electrics	90-110 V	1	50 Hz	-09154
	90-110 V	1	60 Hz	-09164
	190-230 V	1	50 Hz	-19150
	190-230 V	1	60 Hz	-20370
	200-230 V	3	50+60 Hz	-20370
	380-420 V	3	50+60 Hz	-40370
	480 V	3	60 Hz	-48360
	Voltage	Phases	Frequency	Motor-ID

* Type plate not included in delivery



No RemoteID

RemoteID: - 05

RemoteID: - 10

ITH VK-29-03-2012