

PROJECT:	Hurley Engineering Web Design Assist	UNIT TAG:	BP-1	QUANTITY:	1
REPRESENTATIVE:	Hurley Engineering Company	TYPE OF SERVICE:	Domestic Water	DATE:	_____
ENGINEER:	To Be Determined	SUBMITTED BY:	Devin Carle-Hurley Engineering	DATE:	_____
CONTRACTOR:	To Be Determined	APPROVED BY:	_____	DATE:	_____
		ORDER NO.:	800-861-7122	DATE:	_____



Product photo could vary from the actual product


HYDRO MULTI-B/E 2 CME15-3



Booster systems with frequency-controlled pumps



HURLEY ENGINEERING
MANUFACTURERS REPRESENTATIVES

Conditions of Service		Pump Data		Motor Data	
Flow:	180 US gpm	Maximum operating pressure:	145 psi	Rated voltage:	440-480 V
Head:	210 ft	Liquid temperature range:	32 .. 140 °F	Main frequency:	60 Hz
Efficiency:	62 %	Pipe connection:	3ANSI		
Liquid:	Water	Product number:	91149133		
Temperature:	68 °F				
NPSH required:	19.67 ft				
Viscosity:	_____				
Specific Gravity:	1.000				

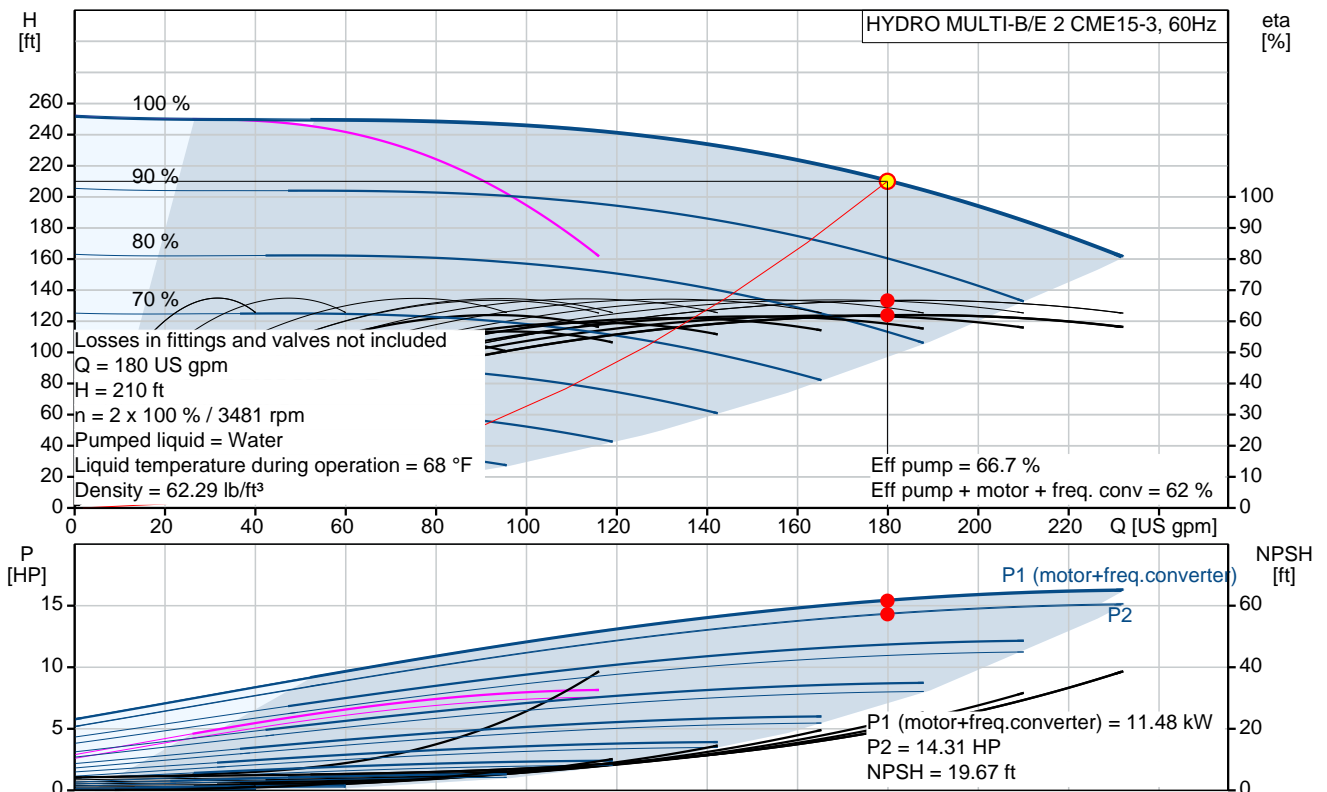

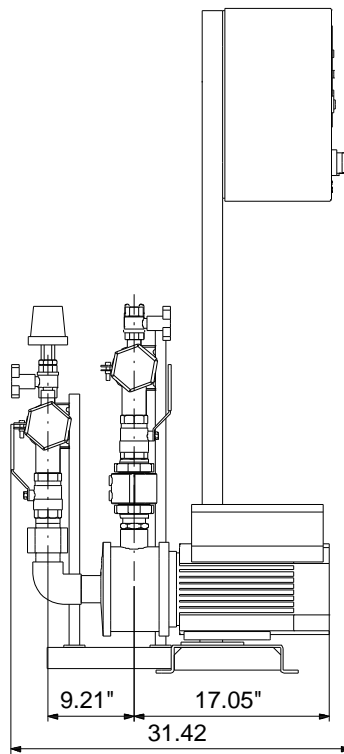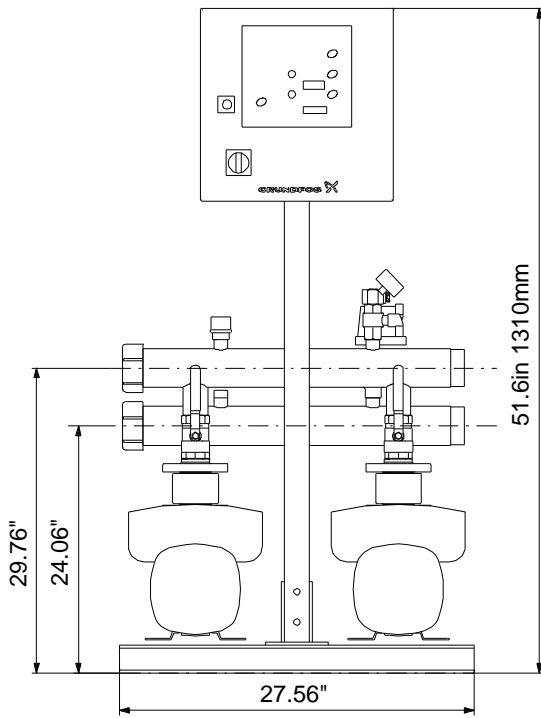

Materials:

Pump: EN-GJL-200

Manifolds: EN/DIN 1.4571/ AISI 316 TI

Count	Description
1	<p data-bbox="225 338 580 365">HYDRO MULTI-B/E 2 CME15-3</p> <div data-bbox="252 383 584 837">  </div> <p data-bbox="619 824 1070 846" style="text-align: center;">Product photo could vary from the actual product</p> <p data-bbox="225 853 491 880">Product No.: 91149133</p> <p data-bbox="225 884 1442 965">Pressure booster system designed and manufactured by Grundfos. Delivered on a common base plate, completely assembled and tested before it leaves the factory and ready for connection of water and electricity.</p> <p data-bbox="225 1001 1401 1055">All pumps are Grundfos CME pumps with integrated frequency drives connected in parallel and operated in cascade.</p> <p data-bbox="225 1090 1431 1144">The booster maintains a constant pressure through continuous adjustment of speed of the pumps and starting and stopping the pumps to meet the required flow.</p> <p data-bbox="225 1180 485 1207">The system consists of:</p> <ul data-bbox="225 1238 1262 1413" style="list-style-type: none"> -2 horizontal multistage pumps with integrated frequency converter, type CME15-3 -A suction and a discharge manifold in EN/DIN 1.4571/ AISI 316 TI -One non-return valve per pump placed on the discharge side as standard. -Two isolating valves and a clamp ring per pump for easy service and inspection of the pumps. -Pressure sensor and gauge. -CU323 Pump controller for controlling parallel coupled pumps in cascade. <p data-bbox="225 1449 448 1476">Optional equipment:</p> <ul data-bbox="225 1480 914 1798" style="list-style-type: none"> -Redundant Primary Sensor -Water Shortage Protection -Non return valve on suction side. -Communication Modules for LON, BACnet, Modbus and GSM -Phase Failure monitoring -Beacon -Audible alarm -External transformer -High / Low Level alarm -System in operation indicating lamp -Alarm indicating lamp <p data-bbox="225 1834 368 1861">Accessories:</p> <ul data-bbox="225 1865 544 1946" style="list-style-type: none"> -Level Switch 5 meter cable -Level Switch 10 meter cable -Extra documentation <p data-bbox="225 1982 820 2009">Functions and features of the CU323 Pump controller:</p> <ul data-bbox="225 2013 651 2094" style="list-style-type: none"> -Constant pressure control -Automatic cascade control -Automatic alternation between pumps



Company name:

Created by:

Phone:

Date:

2/8/2019


Count	Description								
	<ul style="list-style-type: none">-Stop function-High Pressure Protection-Sensor Fault Protection-Motor Protection-Standby pumps-Automatic Display Lock-External Start / Stop (potential free contacts)-Easy to use HMI with 2 displays for set-point and process value-2 digital outputs,-Auto / manual control of pumps-Optional bus communication-Optional Safe Tank filling sequence-Optional monitoring of inlet pressure by means of inlet sensor <p>Technical data:</p> <table><tr><td>Rated Flow:</td><td>180 US gpm</td></tr><tr><td>Rated Head:</td><td>211 ft</td></tr><tr><td>Liquid temperature:</td><td>0 – 140 °F</td></tr><tr><td>Max Pressure</td><td>: 145 psi</td></tr></table> <p>Pump Material: EN-GJL-200 Shaft Seal: AQQE (SiC/SiC/EPDM)</p> <p>Mains Supply: 440-480 V</p> <p>Starting Method CME pump: electronically Power of CME pump: 7.51 HP</p> <p>Size of manifold connection: 3ANSI Net Weight: 460 lb Gross Weight: 683 lb</p>	Rated Flow:	180 US gpm	Rated Head:	211 ft	Liquid temperature:	0 – 140 °F	Max Pressure	: 145 psi
Rated Flow:	180 US gpm								
Rated Head:	211 ft								
Liquid temperature:	0 – 140 °F								
Max Pressure	: 145 psi								



Company name:
Created by:
Phone:

Date: 2/8/2019

91149133 HYDRO MULTI-B/E 2 CME15-3 60 Hz

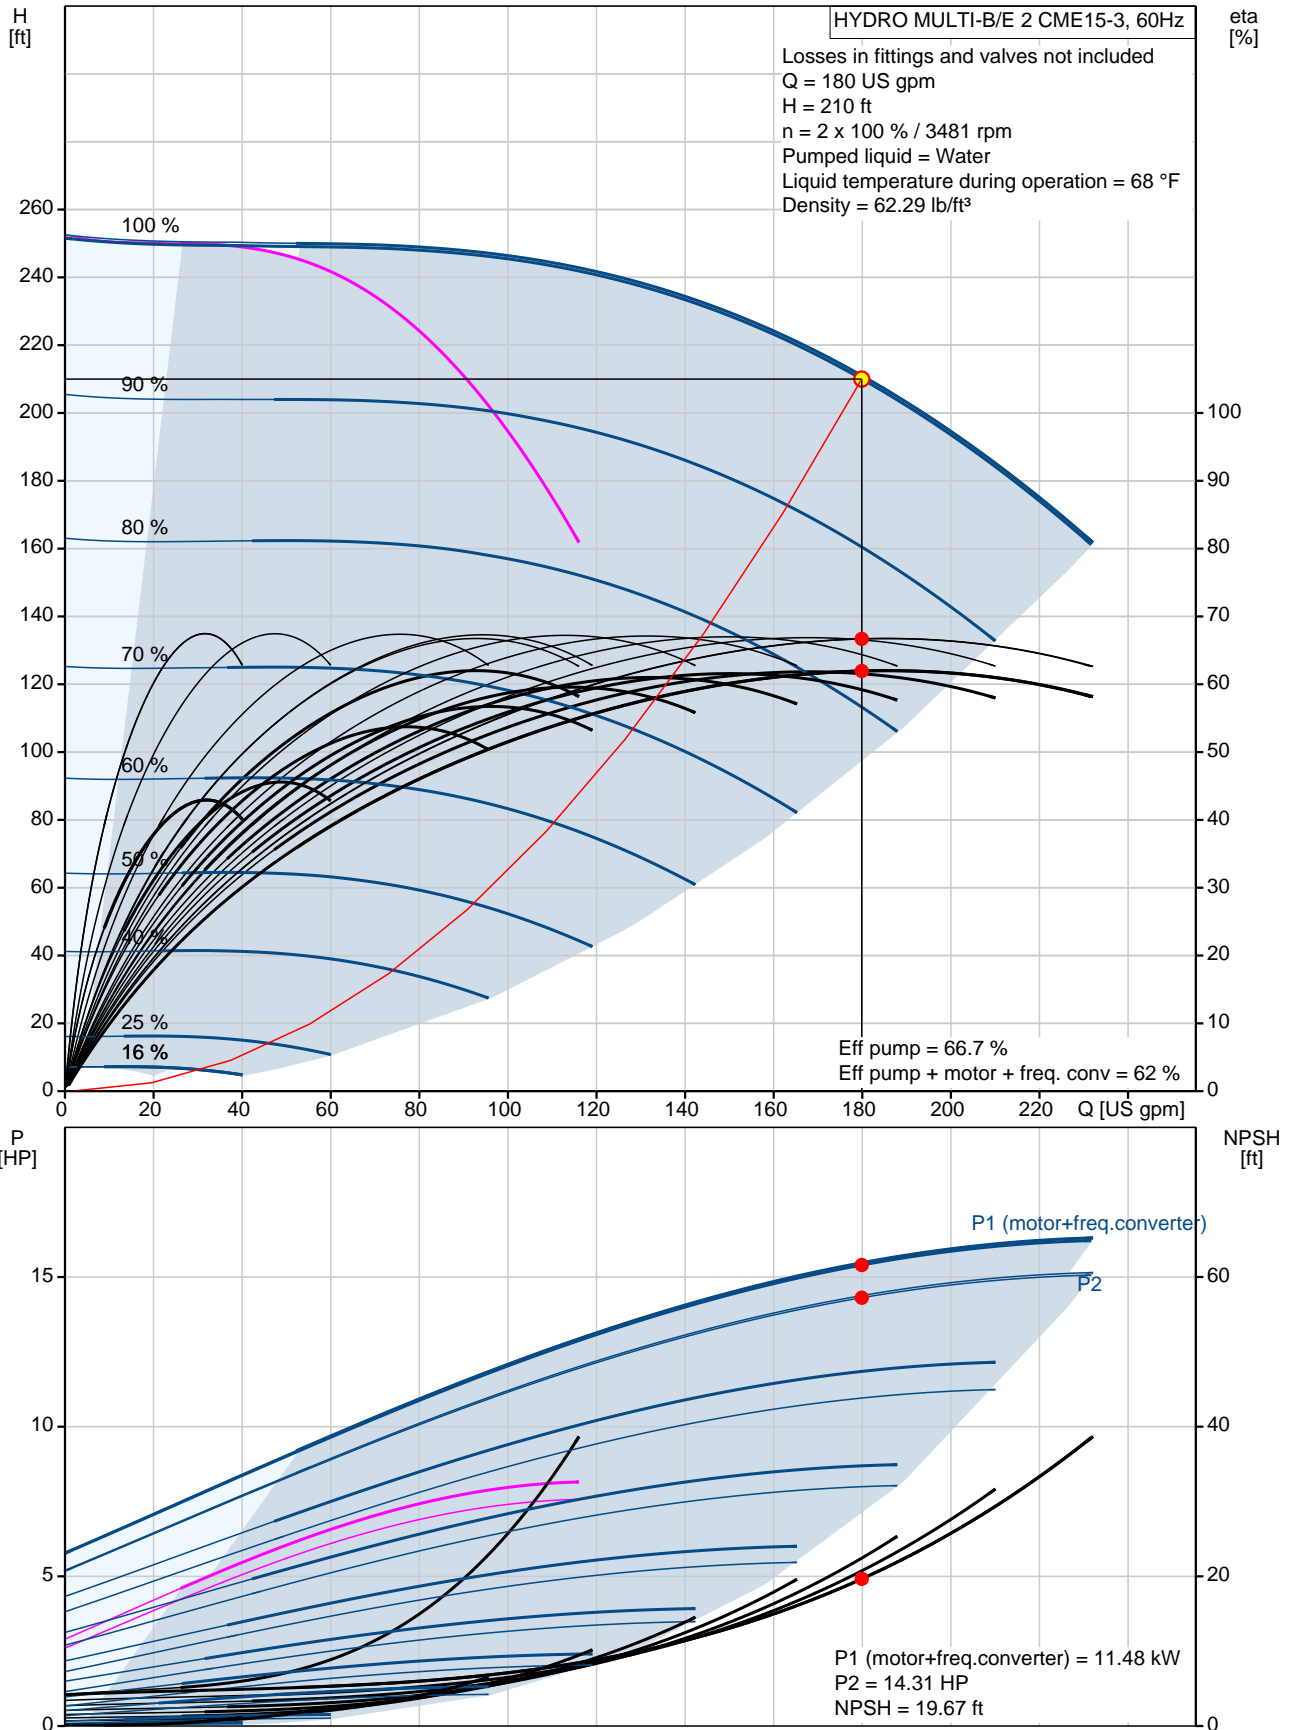

Description	Value
General information:	
Product name:	HYDRO MULTI-B/E 2 CME15-3
Product No.:	91149133
EAN:	5711490041408
Technical:	
Actual calculated flow:	180 US gpm
Min flow system:	26.4 US gpm
Resulting head of the pump:	210 ft
Head max:	241.5 ft
Main pump name:	CME15-3
Main pump Number:	99077774
Number of pumps:	2
Model:	A
Materials:	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
Installation:	
Maximum operating pressure:	145 psi
Pipe connection:	3ANSI
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
Electrical data:	
Power (P2) main pump:	7.51 HP
Main frequency:	60 Hz
Rated voltage:	3 x 440-480 V
Starting main:	electronically
Rated current of system:	17.8 A
Controls:	
Control type:	E
Operation unit:	CU323-2
Tank:	
Diaphragm tank:	No
Others:	
Net weight:	460 lb
Gross weight:	683 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

