

Pressure Boosting System

GRUNDFOS HYDRO MULTI-B

The Grundfos Hydro Multi-B is a compact, reliable, and energy efficient constant pressure booster system ideal for domestic water pressure such as apartments, large homes, and multi-story buildings.

This system is a unique combination of variable speed multi-stage pumps and simple user interface, and provides a lower cost booster solution. The CME pump combined with an MLE motor provides variable speed functionality and energy efficiency.



Key Features and Benefits

- Plug-and-pump system is the easiest on the market to specify, size, purchase, install and commission
- Single source responsibility ensures one manufacturer for pumps, motors, system components and control
- An affordable option for your pressure boosting applications
- Compact design fits into tight spaces which makes it ideal for retrofits
- SCADA communication capable via ethernet and all industry standard BUS protocols
- Grundfos GO lets you use your smart phone to access interface, regardless of pump location
- Drinking water approvals NSF61/372

CU 323 CONTROLLER

- Designed to run up to three parallel connected pumps
- Simplicity was the key design concept of this powerful and extremely easy to use pump controller
- Enables manual setting and change of parameters such as setpoint, start/stop of system or individual pumps, resetting of alarms
- BACnet, BACnet IP, Modbus, Modbus IP, Profibus and SCADA communication options guarantee integration into your management system of choice

CME PUMP

- An industrial quality and quiet horizontal multi-stage pump, the compactness of the Hydro Multi-B is only achievable due to the unique combination of size and performance that the Grundfos CME

MLE MOTOR

- Grundfos integrated variable frequency drive and motor combined eliminates complexity by matching variable speed motor, drive and control logic components

- Incorporates permanent magnet motor technology for overall variable frequency drive and motor efficiency higher than premium efficiency motors
- Integrated variable frequency drive saves space compared to motor and external drive
- Requires no external motor protection and incorporates thermal protection against slow overloading components

MANIFOLDS

- Hygienically designed 316 stainless steel manifolds guarantee protection against corrosion
- Extrusion process results in hydraulic optimization, reduced pressure loss and noise, as well as the best conditions to meet hygienic standards


APPLICATIONS

- Domestic water pressure boosting
- Multistory buildings, such as apartment buildings
- Light commercial
- Rural areas requiring pressure boosting

HYDRO MULTI-B Technical Data

HYDRO MULTI-B INFORMATION

| | |
|---------------------|------------------|
| Flow, Q: | max. 360 gpm |
| Head, H: | max. 240 ft |
| Liquid Temperature: | +32° F to 176° F |
| Working Pressure: | max. 145 psi |

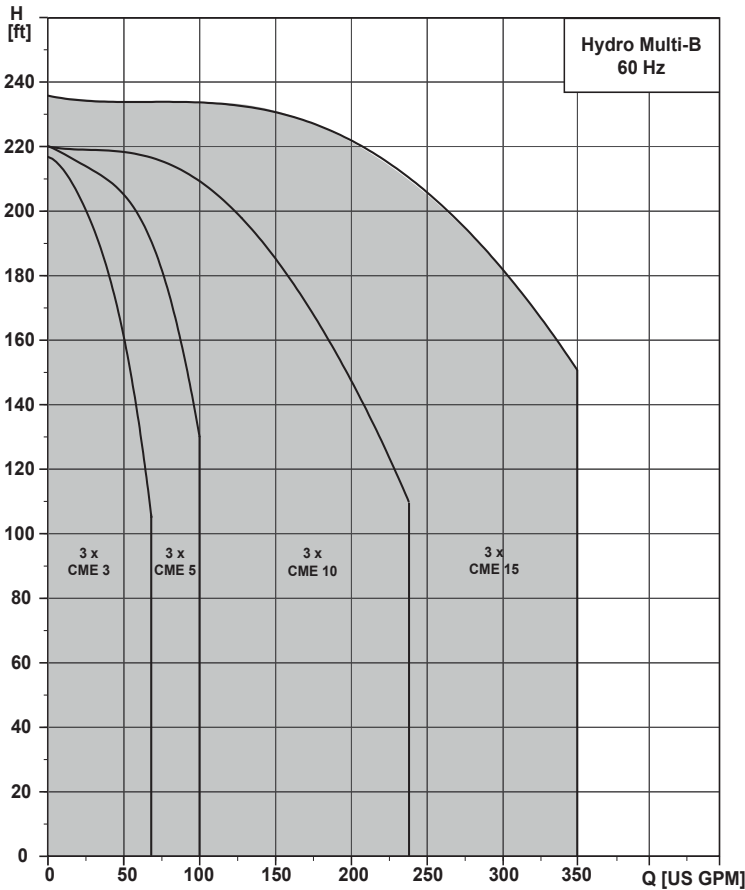

The name Grundfos, the Grundfos logo, and be think innovate are registered trademarks owned by Grundfos Holding A/S or Grundfos A/S, Denmark. All rights reserved worldwide. L-PR-SU-005 01:18