

PROJECT:	Hurley Engineering-TPE3 READY TO SHIP	UNIT TAG:	_____	QUANTITY:	1
REPRESENTATIVE:	Hurley Engineering	TYPE OF SERVICE:	_____	DATE:	2/10/2020
ENGINEER:	_____	SUBMITTED BY:	Devin Carle	DATE:	_____
CONTRACTOR:	To Be Determined	APPROVED BY:	_____	DATE:	_____
		ORDER NO.:	_____	DATE:	_____






Product photo could vary from the actual product

## TPE3 40-80-S S-A-G-A-BQQE-CAB

Single-stage in-line pumps with frequency converters

Conditions of Service		Pump Data		Motor Data	
Flow:	55.8 US gpm	Liquid temperature range:	-13 .. 248 °F	Rated power - P2:	0.33 HP
Head:	17.17 ft	Maximum ambient temperature:	122 °F	Rated voltage:	200-240 V
Efficiency:	58.7 %	Shaft seal:	BQQE	Main frequency:	60 Hz
Liquid:	Water	Pipe connection:	DN 40	Number of poles:	0
Temperature:	68 °F	Product number:	98819499	Enclosure class:	IP55
NPSH required:	4.24 ft			Insulation class:	F
Viscosity:	_____			Motor protection:	YES
Specific Gravity:	1.000			Motor type:	71A
				Motor_efficiency:	81.1 %

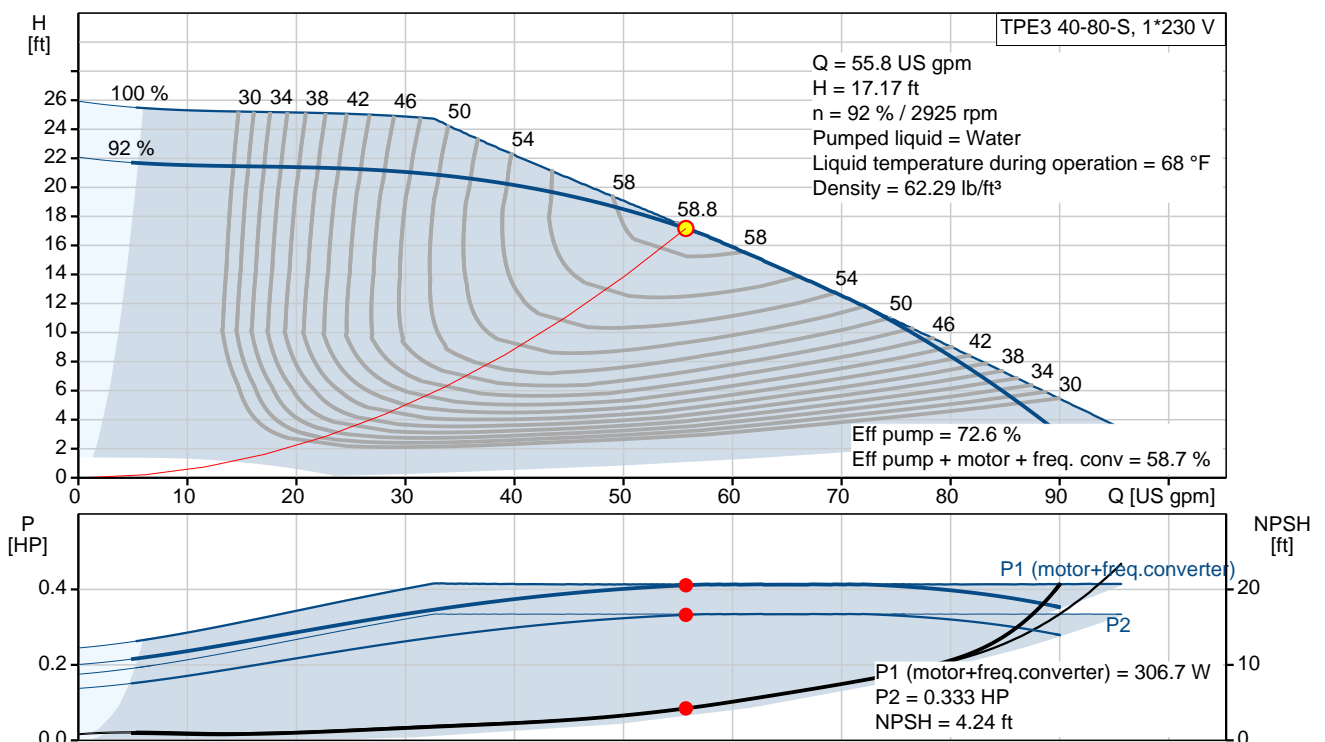

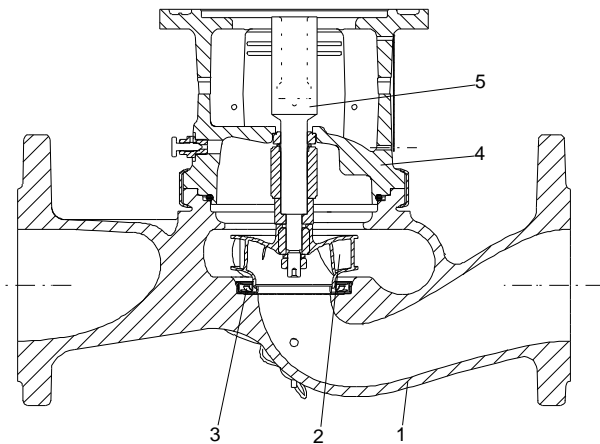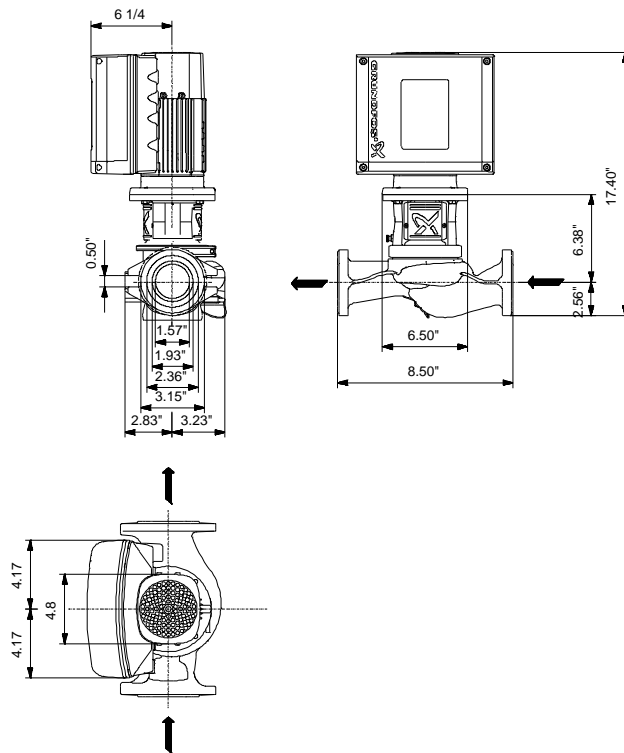


**Materials:**

Pump housing: Cast iron

ASTM A48-40 B

Impeller: Composite PES/PP 30% GF

Material code: A

Count	Description
1	<p data-bbox="225 340 630 362"><b>TPE3 40-80-S S-A-G-A-BQQE-CAB</b></p> <div data-bbox="225 383 603 831">  </div> <p data-bbox="619 824 1072 846">Product photo could vary from the actual product</p> <p data-bbox="225 857 491 880">Product No.: <a href="#">98819499</a></p> <p data-bbox="225 913 1455 969">The pump is of the top-pull-out design, i.e. the power head (motor, pump head and impeller) can be removed for maintenance or service while the pump housing remains in the pipework.</p> <p data-bbox="225 974 1204 996">The shaft seal is according to EN 12756. Pipework connection is via PN 16 ANSI flanges.</p> <p data-bbox="225 1001 753 1023">Pipework connection is via PN 16 ANSI flanges.</p> <p data-bbox="225 1028 1431 1084">The pump is fitted with a fan-cooled, permanent-magnet synchronous motor. The motor efficiency is classified as IE5 in accordance with IEC 60034-30-2.</p> <p data-bbox="225 1088 1455 1144">The motor includes a frequency converter and PI controller in the motor terminal box. This enables continuously variable control of the motor speed, which again enables adaptation of the performance to a given requirement.</p> <p data-bbox="225 1205 544 1238"><b>Further product details</b></p> <p data-bbox="225 1272 1455 1328">The operating panel on the motor terminal box features a four-inch TFT display, push-buttons and the Grundfos Eye indicator.</p> <p data-bbox="225 1361 1444 1440">The display gives an intuitive and user-friendly interface to all functions. The push-buttons are used to navigate through the menu structure to access pump and performance data on site and enable setting of required setpoint as well as setting of pump to "Min." or "Max." operation or to "Stop".</p> <p data-bbox="225 1473 1401 1552">Communication with the pump is also possible by means of Grundfos GO Remote (accessory). The remote control enables further settings as well as reading out of a number of parameters such as "Actual value", "Speed", "Power input" and total "Power consumption".</p> <p data-bbox="225 1585 1241 1608">The Grundfos Eye indicator on the operating panel provides visual indication of pump status:</p> <ul data-bbox="263 1619 1444 1765" style="list-style-type: none"> <li>• "Power on": Motor is running (rotating green indicator lights) or not running (permanently green indicator lights)</li> <li>• "Warning": Motor is still running (rotating yellow indicator lights) or has stopped (permanently yellow indicator lights)</li> <li>• "Alarm": Motor has stopped (flashing red indicator lights).</li> </ul> <p data-bbox="225 1798 311 1832"><b>Pump</b></p> <p data-bbox="225 1832 1161 1854">Pump housing and pump head are electrocoated to improve the corrosion resistance.</p> <p data-bbox="225 1859 491 1881">Electrocoating includes:</p> <ol data-bbox="225 1886 718 2009" style="list-style-type: none"> <li>1) Alkaline-based cleaning.</li> <li>2) Pretreatment with zinc phosphate coating.</li> <li>3) Cathodic electrocoating (epoxy).</li> <li>4) Curing of paint film at 200-250 °C.</li> </ol>

Count	Description
	<p>The pump is fitted with an unbalanced rubber bellows seal with torque transmission across the spring and around the bellows. Due to the bellows, the seal does not wear the shaft, and the axial movement is not prevented by deposits on the shaft.</p> <p>Primary seal:</p> <ul style="list-style-type: none"> <li>• Rotating seal ring material: silicon carbide (SiC)</li> <li>• Stationary seat material: silicon carbide (SiC)</li> </ul> <p>This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles.</p> <p>Secondary seal material: EPDM (ethylene-propylene rubber) EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils.</p> <p>A circulation of liquid through the duct of the air vent screw ensures lubrication and cooling of the shaft seal.</p> <p><b>Motor</b></p> <p>The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. Electrical tolerances comply with IEC 60034.</p> <p>The motor efficiency is classified as IE5 in accordance with IEC 60034-30-2.</p> <p><b>Technical data</b></p> <p>Controls:</p> <p>Frequency converter:                      Built-in</p> <p><b>Liquid:</b></p> <p>Pumped liquid:                              Water Liquid temperature range:                -13 .. 248 °F Selected liquid temperature:              68 °F Density:                                        62.29 lb/ft<sup>3</sup></p> <p><b>Technical:</b></p> <p>Pump speed on which pump data is based: 2970 rpm Actual calculated flow:                      55.8 US gpm Resulting head of the pump:                17.17 ft Actual impeller diameter:                  2.91 in Code for shaft seal:                         BQQE Curve tolerance:                              ISO9906:2012 3B2</p> <p><b>Materials:</b></p> <p>Pump housing:                                Cast iron     ASTM A48-40 B     EN 1561 EN-GJL-250</p> <p>Impeller:                                        Composite PES/PP 30% GF</p> <p><b>Installation:</b></p> <p>Range of ambient temperature:            -4 .. 122 °F Maximum operating pressure:               PN 16 bar Type of connection:                         ANSI Pipe connection:                              DN 40 Pressure rating for pipe connection:      PN 16 Flange size for motor:                        56C</p> <p><b>Electrical data:</b></p> <p>Motor type:                                    71A IE Efficiency class:                            IE5 Rated power - P2:                             0.33 HP Main frequency:                               60 Hz Rated voltage:                                 1 x 200-240 V Rated current:                                 1.75-1.50 A</p>



Company name:

Created by:

Phone:

Date:

2/11/2020



Count	Description
	Cos phi - power factor: 0.95
	Rated speed: 360-4000 rpm
	IE efficiency: 81.1%
	Motor efficiency at full load: 81.1 %
	Number of poles: 0
	Enclosure class (IEC 34-5): IP55
	Insulation class (IEC 85): F
	Motor Number: 99630318
	<b>Others:</b>
	Net weight: 45.9 lb
	Gross weight: 61.7 lb
	Country of origin: HU
	Custom tariff no.: 8413.70.2022



Company name:  
Created by:  
Phone:

Date: 2/11/2020

### 98819499 TPE3 40-80-S S-A-G-A-BQQE-CAB 60 Hz

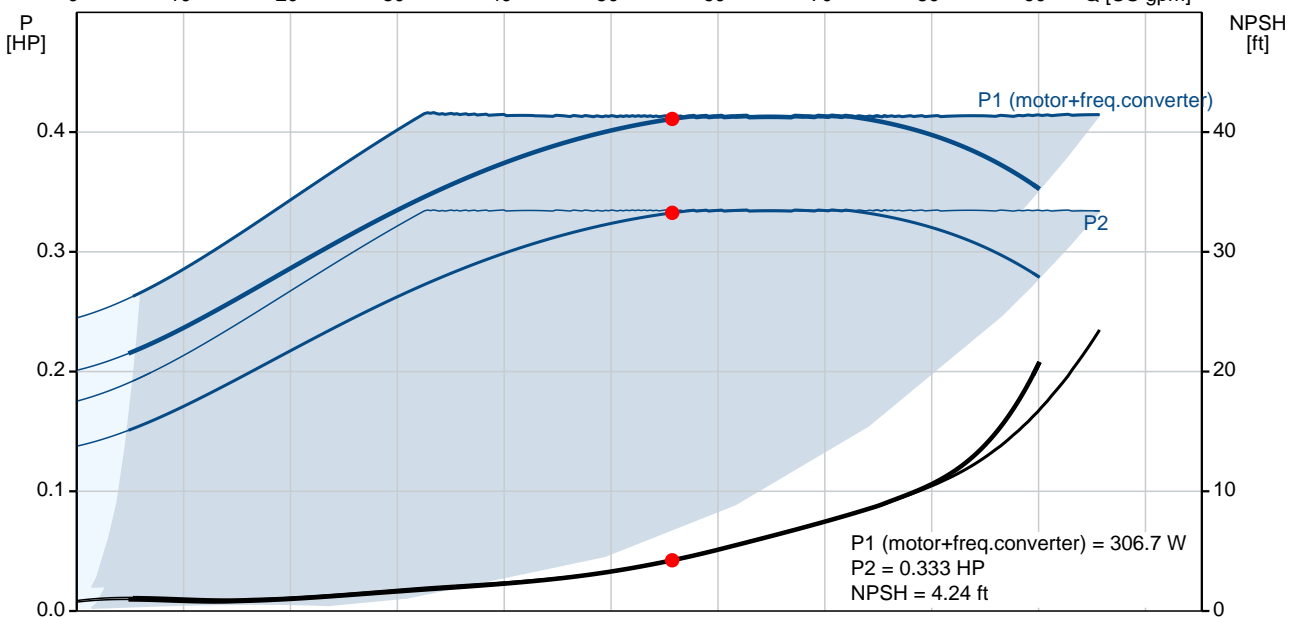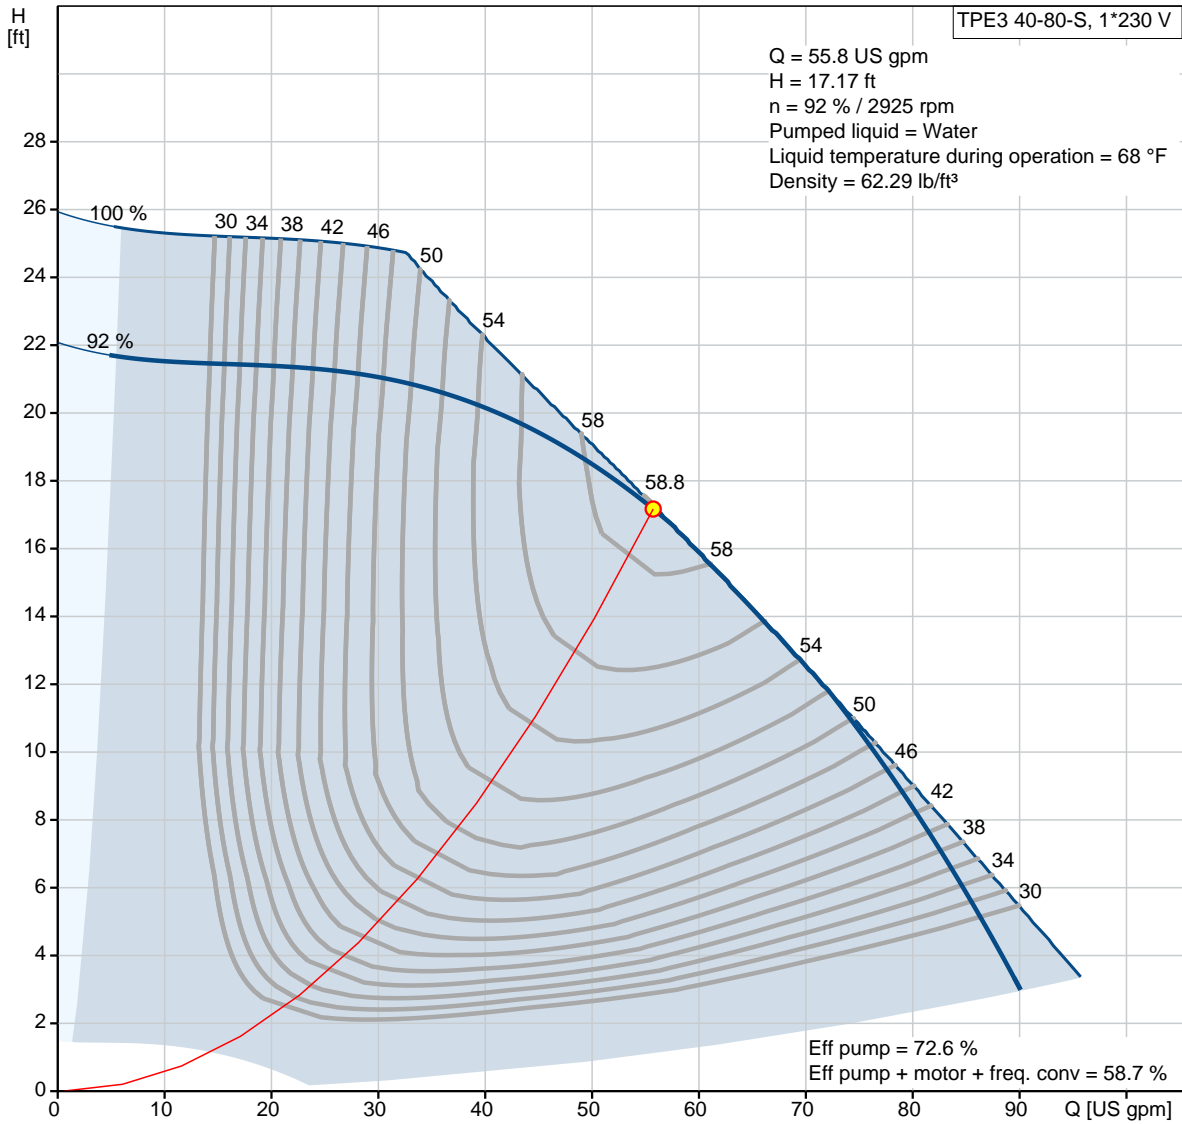





Company name:

Created by:


Phone:

Date: 2/11/2020

Description	Value
Config. file no:	98481320
Country of origin:	HU
Custom tariff no.:	8413.70.2022



**98819499 TPE3 40-80-S S-A-G-A-BQQE-CAB 60 Hz**

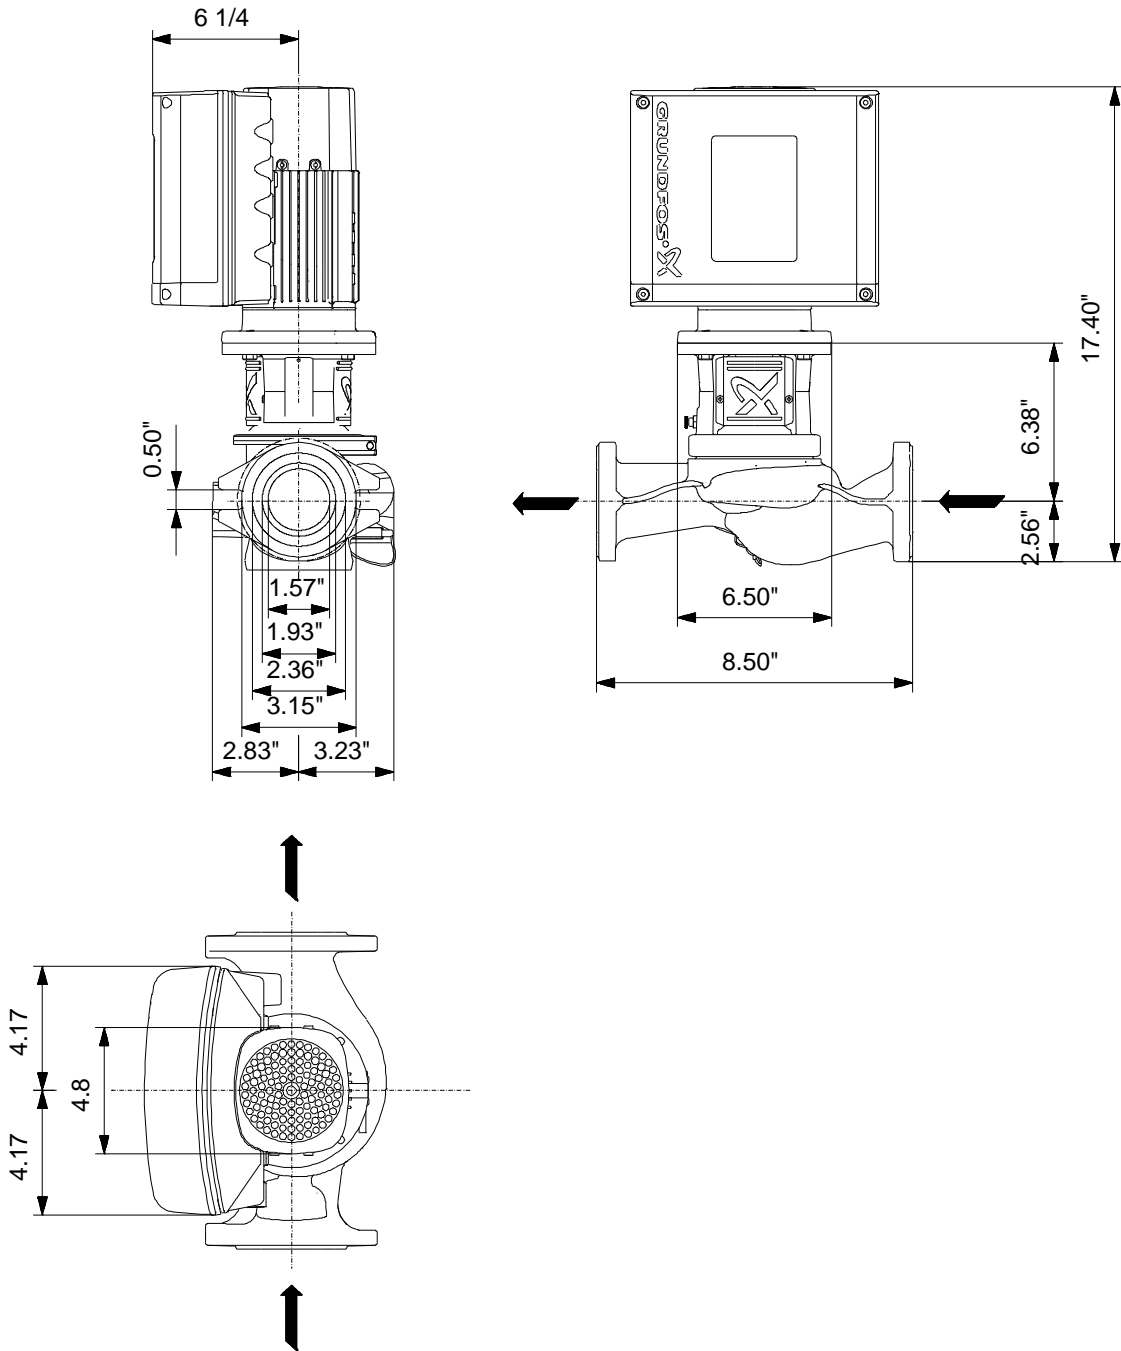

Note! All units are in [in] unless otherwise stated.  
Disclaimer: This simplified dimensional drawing does not show all details.