

This file has been cleaned of potential threats.

If you confirm that the file is coming from a trusted source, you can send the following SHA-256 hash value to your admin for the original file.


2a96040a432152634a683faf615b85cdd39cd4909a76d5551e8c6599be502f3e

To view the reconstructed contents, please SCROLL DOWN to next page.



SPECIFICATIONS	STANDARD	*SPECIAL
<b>ELECTRICAL</b>		
Cutoff Frequency (Fco)	10 to 2000 MHz	1 to 3000 MHz
Number of Sections Available	3 to 6	2 to 10
Nominal Impedance	50	50 to 100
Maximum Insertion Loss	See Curve	See Curve
Maximum VSWR (Fco. to 3 Fco.)	1.5/1	1.3/1
Attenuation in the Stopband	See Page 67	See Page 67
Maximum Input Power (Average) (Watts to 10,000 ft.)	2	4
Maximum Input Power (Peak) (Watts to 10,000 ft.)	20	40
<b>ENVIRONMENTAL</b>		
Shock	20 G's	50 G's
Vibration	10 G's	15 G's
Humidity	90% relative	100% relative
Altitude	Unlimited	Unlimited
Temperature Range (Operating)	-40°C to + 85°C	-55°C to + 125°C
Temperature (Non-Operating)	-65°C to + 125°C	-65°C to + 125 °C
<b>MECHANICAL</b>		
Approximate Weight in Grams	L x 5 + 10	L x 5 + 10
Mounting Provisions	See Next Page	See Next Page
Special Configurations	Consult Factory	Consult Factory

\*Contact Lark Engineering

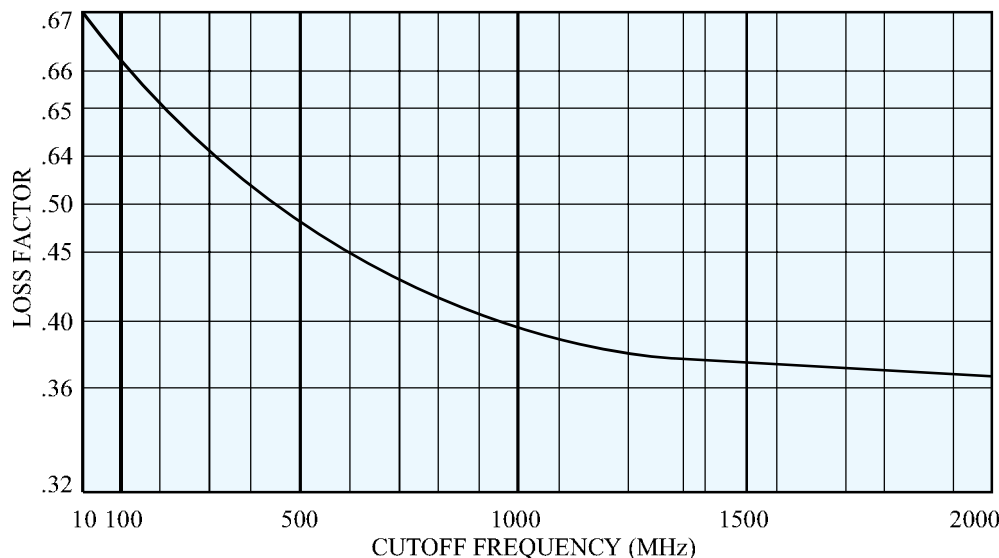

**INSERTION LOSS:**

The maximum Insertion Loss at cutoff frequency is equal to:

$$LF \times N + 0.05dB$$

Where:

LF = Loss Factor

N = Number of Sections

Example:


A 3 section HMC with a cutoff frequency of 500 MHz would be:

$$0.48 \times 3 = 1.44 + 0.05 = 1.5dB$$

FREQUENCY RANGE	NUMBER OF SECTIONS	W	H	L	X
10 - 100 MHz	2 to 3	0.55	0.40	1.00	1.25
	4 to 5	0.55	0.40	1.50	1.75
	6 to 7	0.55	0.40	1.75	2.00
101 - 300 MHz	2 to 3	0.44	0.40	0.75	1.00
	4 to 5	0.44	0.40	1.00	1.25
	6 to 7	0.44	0.40	1.50	1.75
301 - 3000 MHz	2 to 3	0.44	0.31	0.75	1.00
	4 to 5	0.44	0.31	0.75	1.00
	6 to 7	0.44	0.31	1.25	1.50

Over 7 sections- Consult Lark Engineering  
 Note: All Standard Units with SMA Connectors are supplied H = 0.40"

MECHANICAL SPECIFICATIONS

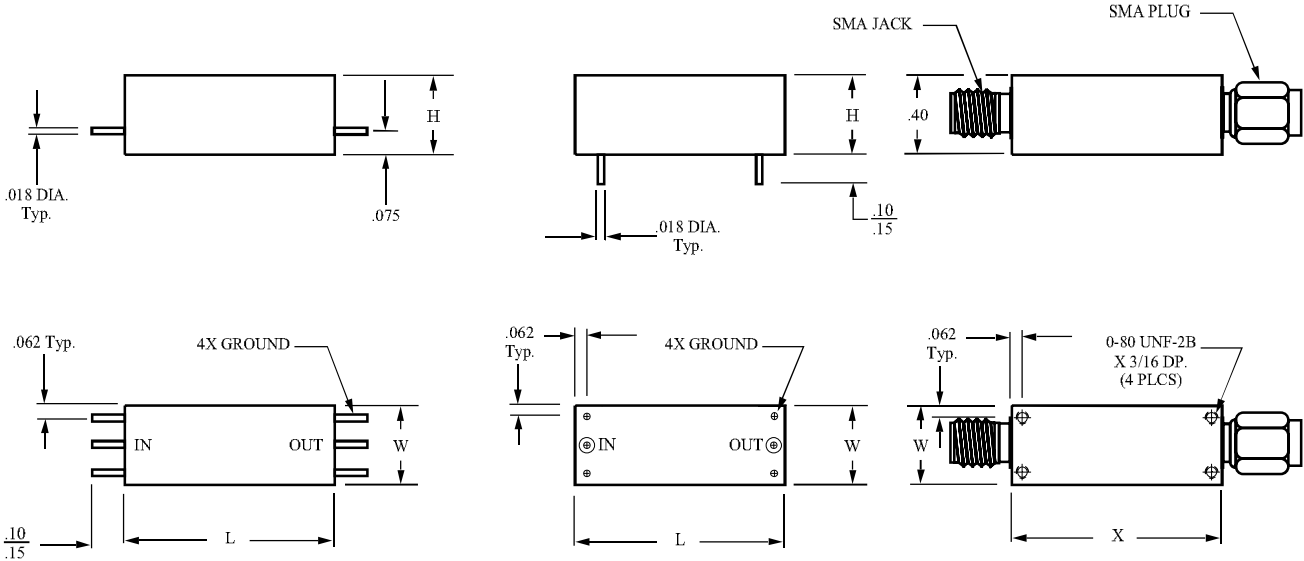

CONNECTORS AVAILABLE ON HMC SERIES:

TYPE	TYPE
SMA Jack	Solder Pin Radial
SMA Plug	Special
Solder Pin Axial	

The size shown is a standard used by Lark to facilitate low cost, easily reproduced units. Should you require another size, please submit all of your requirements, both electrical and mechanical, to Lark Engineering. This will enable Lark to quote the optimum design for your application.