


Dimensions

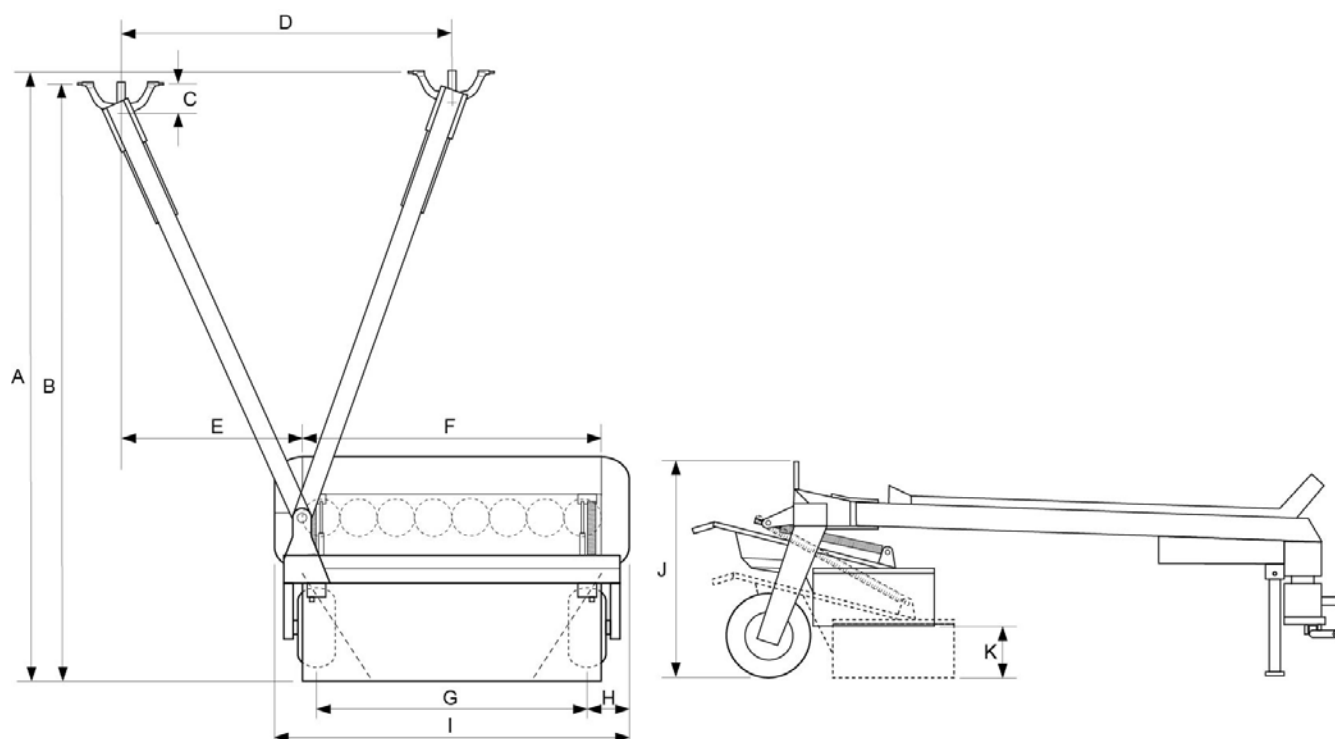


Dim.	Unit	4324LT/LR	4328LT/LR	4332LT/LR	4336LT/LR
A	mm	5360		5940	
B	mm	5130		5710	
C	mm	350			
D	mm	2700		3050	
E	mm	1200		1400	
F	mm	2400	2800	3200	3600
G	mm	1620	2075	2380	2780
H	mm	675			
I	mm	2950	3450	3750	4150
J	mm	1700* / 2040**			
K	mm	425			

* Model without EU type-approval

** Model with EU type-approval

Machine

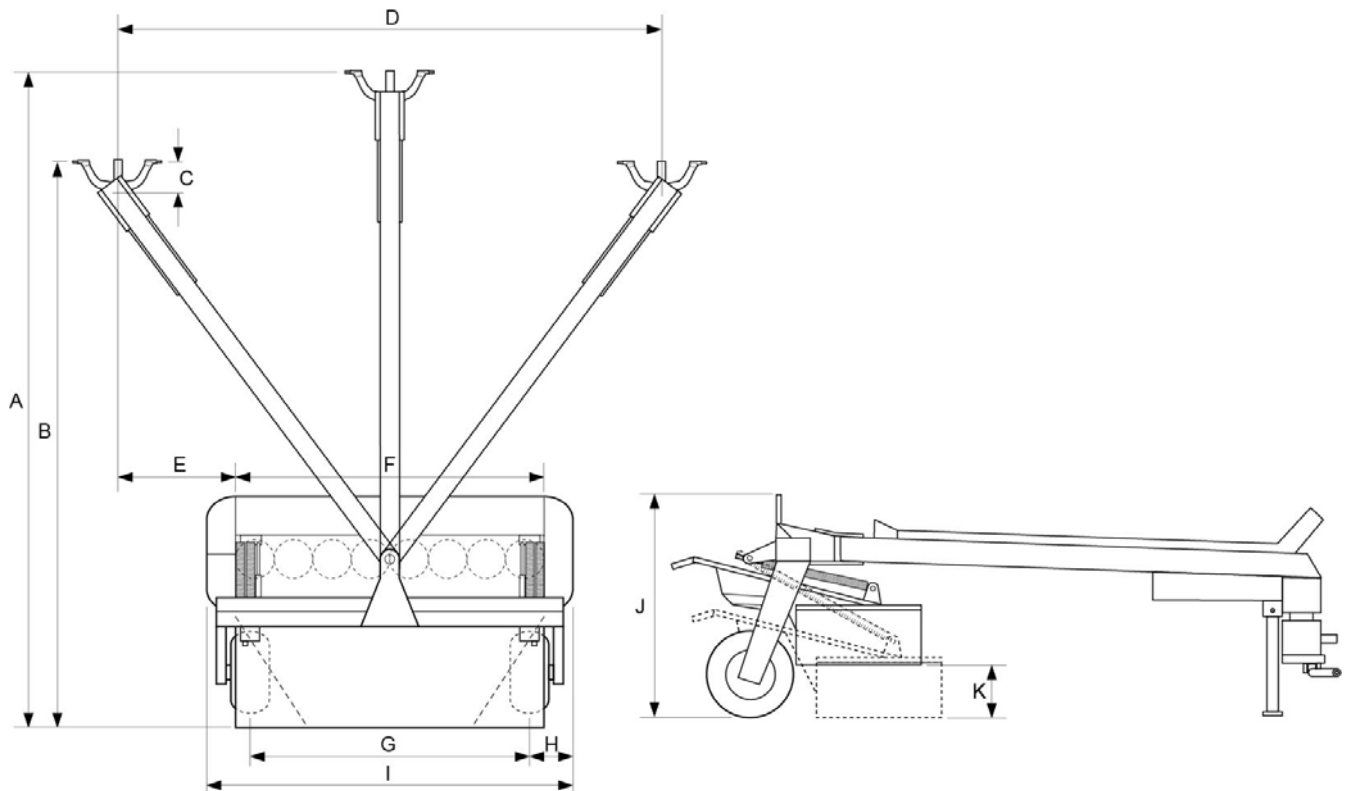


Dim.	Unit	4332CT/CR	4336CT/CR	4340CT/CR
A	mm	7600		8200
B	mm	6250	5900	6550
C	mm	350		
D	mm	6000	6875	7400
E	mm	1425	1650	1750
F	mm	3200	3600	4000
G	mm	2380	2780	3180
H	mm	675		
I	mm	3750	4150	4650
J	mm	1700* / 2040**		
K	mm	425		

* Models without EU type-approval

** Models with EU type-approval

Weight

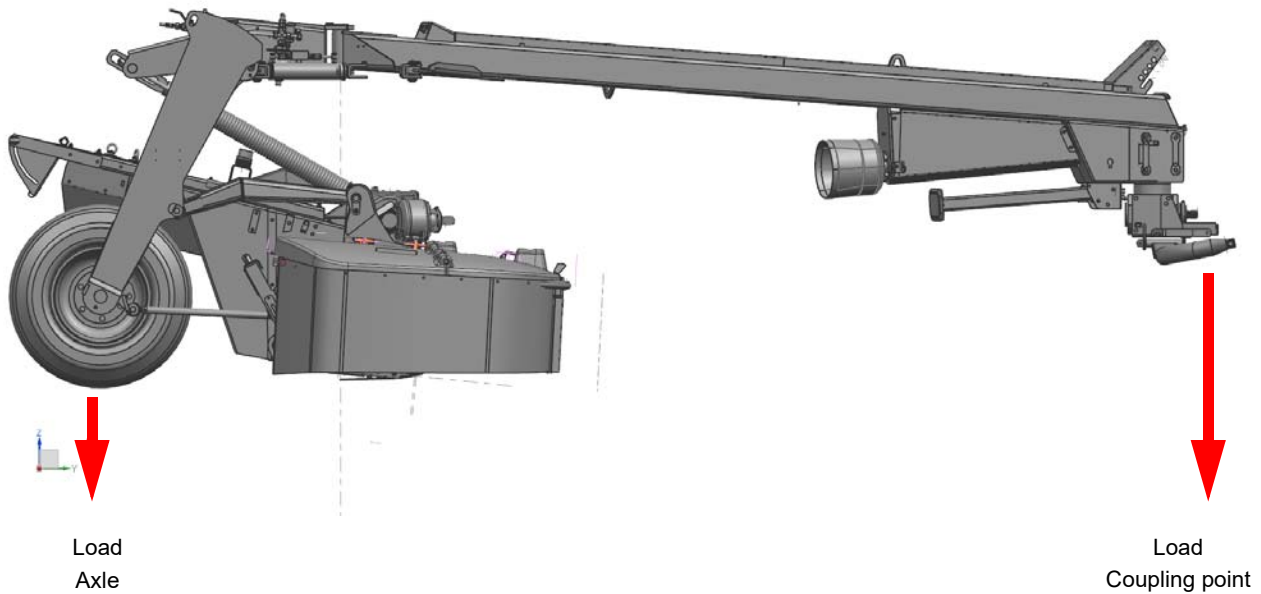

Model	Load Axle kg	Load Coupling point kg	Total weight kg
4324LT	1260	460	1720
4324LR	1325	475	1800
4328LT	1330	490	1820
4328LR	1420	490	1910
4332LT	1470	500	1970
4332LR	1545	515	2060
4332CT	1780	540	2320
4332CR	1805	555	2360
4336LT	1630	530	2160
4336LR	1720	530	2250
4336CT	1870	560	2430
4336CR	1965	545	2510
4340CT	1950	550	2500
4340CR	2070	595	2665

Specifications

LT model

	Unit	4324LT	4328LT	4332LT	4336LT
Unladen weight LT model	kg	1720	1820	1970	2160
PTO (Power take-off)	RPM	540/1000 ¹			
Power requirement, minimum	kW	45	50	60	65
	HP	60	70	80	90
Number of cutting discs	parts	6	7	8	9
Number of knives	parts	12	14	16	18
RPM, cutting discs	RPM	3000			
RPM, rotors	RPM	500 ² /600/900/1015 ²			
Stubble height	mm	20-150 ²			
Hydraulic pressure	bar	150			
Wheel	dim	10.0/75-15.3	15.0/55-17		
Tyre pressure	bar	3,5	2,6		
Noise level	dB(A)	90			
Cutting width	m	2,4	2,8	3,2	3,6
Cutting speed	km/h	6-15			
Transport width	m	2,2	2,7	3,0	3,4

- ¹ PTO

→ »Number of revolutions on the PTO outlet« Page 47

- ² Extra equipment.

→ »Rotor RPM« Page 165

→ »Skids« Page 163

CT model

	Unit	4332CT	4336CT	4340CT
Own weight CT model	kg	2320	2430	2500
PTO (Power take-off)	RPM	540/1000 ¹		
Power requirement, minimum	kW	60	65	75
	HP	80	90	100
Number of cutting discs	parts	8	9	10
Number of knives	parts	16	18	20
RPM, cutting discs	RPM	3000		
RPM, rotors	RPM	500 ² /600/900/1015 ²		
Stubble height	mm	20-150 ²		
Hydraulic pressure	bar	150		
Wheel	dim	15.0/55-17		
Tyre pressure	bar	2,6		
Noise level	dB(A)	90		
Cutting width	m	3,2	3,6	4,0
Cutting speed	km/h	6-15		
Transport width	m	3,0	3,4	3,8

- ¹ PTO

→ »Number of revolutions on the PTO outlet« Page 47

- ² Extra equipment.

→ »Rotor RPM« Page 165

→ »Skids« Page 163

Machine

LR model

	Unit	4324LR	4328LR	4332LR	4336LR
LR model unladen weight	kg	1800	1910	2060	2250
PTO (Power take-off)	RPM	540/1000 ¹			
Power requirement, minimum	kW	45	50	60	65
	HP	60	70	80	90
Number of cutting discs	parts	6	7	8	9
Number of knives	parts	12	14	16	18
RPM, cutting discs	RPM	3000			
RPM, rollers	RPM	900/1200 ²			
Stubble height	mm	15 - 100 ²			
Hydraulic pressure	bar	150			
Wheel	dim	10.0/75-15.3	15.0/55-17		
Tyre pressure	bar	3,5	2,6		
Noise level	dB(A)	90			
Cutting width	m	2,4	2,8	3,2	3,6
Cutting speed	km/h	6-15			
Transport width	m	2,2	2,7	3,0	3,4

- ¹ PTO

→ »Number of revolutions on the PTO outlet« Page 47

- ² Extra equipment.

→ »Roller rpm« Page 167

→ »Skids« Page 163

CR model

	Unit	4332CR	4336CR	4340CR
CR model unladen weight	kg	2360	2510	2665
PTO (Power take-off)	RPM	540/1000 ¹		
Power requirement, minimum	kW	60	65	75
	HP	80	90	100
Number of cutting discs	parts	8	9	10
Number of knives	parts	16	18	20
RPM, cutting discs	RPM	3000		
RPM, rollers	RPM	900/1200 ²		
Stubble height	mm	15 - 100 ²		
Hydraulic pressure	bar	150		
Wheel	dim	15.0/55-17		
Tyre pressure	bar	2,6		
Noise level	dB(A)	90		
Cutting width	m	3,2	3,6	4,0
Cutting speed	km/h	6-15		
Transport width	m	3,0	3,4	3,8

- ¹ PTO

→ »Number of revolutions on the PTO outlet« Page 47

- ² Extra equipment.

→ »Roller rpm« Page 167

→ »Skids« Page 163