



## RB10PVC

### LITHIUM IRON PHOSPHATE BATTERY

#### ELECTRICAL SPECIFICATIONS

Nominal Voltage	12.8 V
Nominal Capacity	10 Ah
Capacity @ 25A	24 min
Energy	128 Wh
Resistance	90 mΩ
Efficiency	99%
Self Discharge	<3% per Month


#### DISCHARGE SPECIFICATIONS

Maximum Continuous Discharge Current	10 A
Peak Discharge Current	20 A (7.5 s ±2.5 s)
PCM Discharge Current Cut-Off	30 A (±5 A)
Recommended Low Voltage Disconnect	11 V
PCM Discharge Voltage Cut-Off	8 V
Reconnect Voltage	10 V
Short Circuit Protection	200-500 μs

#### TEMPERATURE SPECIFICATIONS

Discharge Temperature	-4 to 140 °F (-20 to 60 °C)
Charge Temperature	32 to 131 °F (0 to 55 °C)
Storage Temperature	-4 to 140 °F (-20 to 60 °C)
PCM High Temperature Cut-Off	176 °F (80 °C)

#### DIMENSIONAL SPECIFICATIONS

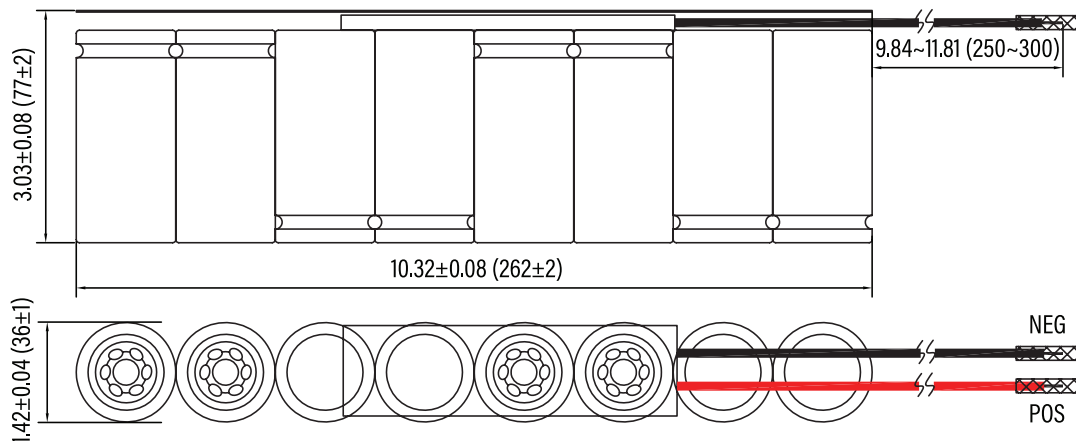

#### MECHANICAL SPECIFICATIONS

Dimensions (L x W x H)	10.3 x 1.4 x 3.0" 262 x 36 x 77 mm
Weight	4 lbs (1.8 kg)
Terminal Type	Wire Leads
Case Material	PVC
Cell Type	Cylindrical
Chemistry	LiFePO <sub>4</sub>

#### CHARGE SPECIFICATIONS

Recommended Charge Current	5 A
Maximum Charge Current	10 A
PCM Charge Current Cut-Off	30 A (±5 A)
Recommended Charge Voltage	14.2 V - 14.6 V
PCM Charge Voltage Cut-Off	15.6 V
Reconnect Voltage	15.2 V

#### COMPLIANCE SPECIFICATIONS

Certifications	CE (battery) UN38.3 (battery) UL1642 & IEC62133 (cells)
Shipping Classification	UN 3480, CLASS 9





## RB10PVC

### PERFORMANCE CHARACTERISTICS

