


## PL-11NR Bending Wave Loudspeaker

1-way system with one DML (distributed mode loudspeaker)

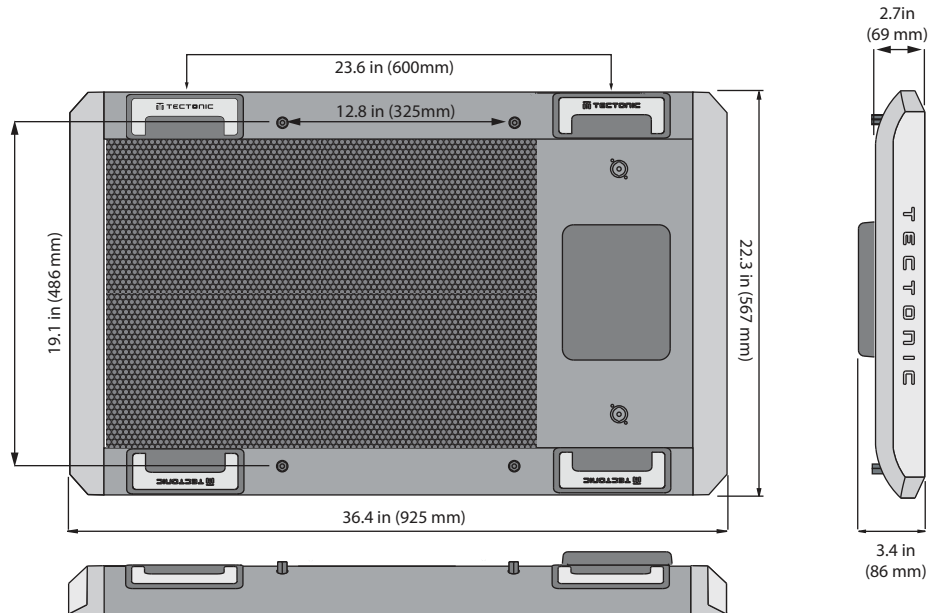

### PL-11NR SPECIFICATIONS:

- Frequency Response:
  - 100Hz – 20kHz (+/-6dB)
  - 93Hz – 20kHz (+/-10dB)
- Amplification:
  - Continuous Power Rating: 200W RMS
  - Program Power / Peak Power: 300W/400W
  - Recommended Amplification: 400W @ 8 ohm
- Neutrik NL4FC four-conductor connectors (pins 1+, 1- used)
- Sensitivity: 92dB @ 1W / 1Meter
- Peak Output: 118dB
- Nominal Impedances:
  - 8 ohm
- Coverage:
  - Horizontal: 165°
  - Vertical: 165°
- Dimensions: 36.4" W x 22.3" H x 2.9" D (925mm W x 567mm H x 74mm D)
- Weight: 58 lbs (26.8 Kg)

*Specifications subject to change without notification.*