


# AURAE TECHNICAL DATA SHEET

PLAN VIEW



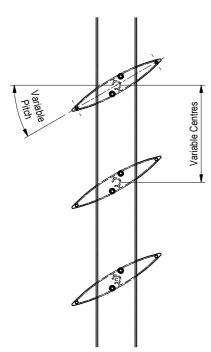

### **END FIXING DETAIL**

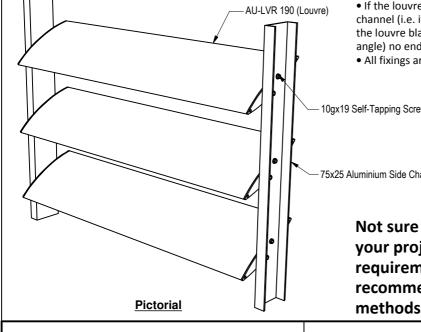

## AURORA<sup>™</sup> 190 END FIXING TO CHANNEL

© 2018 All rights reserved Aurae Ltd Ph: +64 9 218 8690 E: sales@aurae.co.nz www.aurae.co.nz

N.T.S. Scale: Date: 21/02/2014

**Configuration and layout:** 

• The louvre blades can be set at any centres. • Blade angle can be set at any degree of pitch between completely flat and 90° vertical.

< <u>ج</u>

• Once the degree of pitch has been decided upon and the louvres are installed, the angle of the blades is fixed and cannot be changed.

#### Assembly and Installation:

• The louvre blades are fixed to the side channels with stainless 10gx19 self-tapping screws.

• The size of the side channel can be varied to suit individual project requirements. If required, the channel can be substituted for an aluminium flat bar, angle or box section.

#### Structural Requirements:

• The length of the louvre blade must be within the span appropriate to the wind loading on the louvre blade. See Span Data Table for spans relative to wind zones.

• The fixing detail of the side channel to the main support structure varies dependent on the type of structure. Contact Aurae for project specific recommendations.

#### **Componentry and Finishes:**

• All the aluminium components (the louvre blade, end caps and side channel) can be finished with any exterior powder coat or grade of anodising. • Any louvre blades that are too wide to be covered by the side channel are fitted with a 3mm end

cap, finished to match the louvre. • If the louvre blade can fit within the width of the side channel (i.e. if a side channel is used that is larger than the louvre blade, or if the louvre blades are on a steep enough angle) no end cap is required.

All fixings are stainless steel

10gx19 Self-Tapping Screws

75x25 Aluminium Side Channel

Not sure if this is the correct fixing detail for your project? Contact Aurae to discuss your requirements - we will be able to recommend the most suitable fixing methods for your specific scenario.