


- High density delivery of power, data, and A/V.
- Stud or sheetrock mounting flexibility.
- Steel construction for residential MDU and commercial applications.
- Easily reconfigured to adapt to new applications.

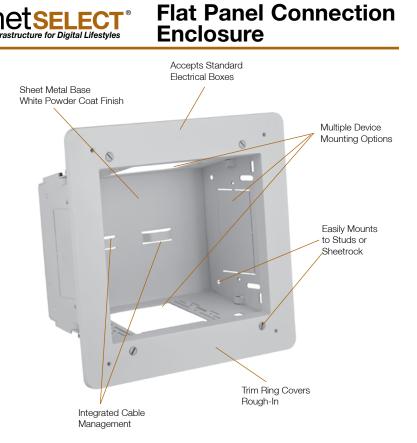

FEATURES

- 2-Gang enclosure with 2 additional 3-Unit Hubbell iSTATION™ A/V Mounting locations.
- Stud or sheetrock mounting integrated into the enclosure. No need for extra hardware.
- ABS trim ring quickly cleans up sheetrock rough-in.
- Aesthetically pleasing and durable white powder coated steel base.
- Optional screw on cover reduces tampering and protects connections.

SPECIFICATIONS

- Mechanical
 - 18ga. cold rolled steel base
 - White powder coat finish
 - High impact ABS trim ring

STANDARDS/LISTINGS/VERIFICATIONS

- cULus 1863 listed
- UL V0 flame rating on ABS trim ring

Hubbell's netSELECT® FPTV connection enclosure delivers highdensity connectivity and power in the wall. In-wall connections allow flat panel displays and interactive "smart" boards to sit flush without dangling cords. It quickly installs to studs or sheetrock without additional components or hardware.

The enclosure is designed to accommodate large bend radii associated with current cable types such as HDMI, DVI, RG6/UQ, and VGA. The base is constructed from 18ga. cold rolled steel, which provides toughness and meets requirements for high-rise residential and commercial construction. The white powder coat finish provides durability and an appearance that blends into the wall.

APPLICATIONS

- Interactive Whiteboards
- Flat Panel Displays
- Home Theater


- Information Displays
- Small Wireless APs
- Multimedia Workstations



HUBBELL WIRING SYSTEMS

ORDERING INFORMAT	TION		DIMENSIONS	
FPTV Connection Enclose	ure		6.50" →	
Description	Color	Catalog Number	(165.1)	
2-Gang In-wall Enclosure	White	NSAV62M		
Steel Cover for NSAV6 serie	s White	NSAV6C		
ACCESSORIES				
Power Kits			$\stackrel{\bullet}{\longleftarrow} \begin{array}{c} 6.13" \\ (155.7) \end{array} \longrightarrow $	← 3.37" —
Description	Color	Catalog Number		(85.6)
Standard Power Kit	White	NSOKP	(201.3) ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓	
Surge Protected Power Kit	Blue	NSOKPS		
Unloaded Plates and Fran	mes		5.19" (131.8) III (92.5)	
Description	Color	Catalog Number		•
Hubbel iSTATION™ Adapter Frame	White	NSAVIMFW		
1-G Blank Plate	White	SP14W		
1-G Decorator Plate	White	NP26W	INTEGRATED SOLUTIONS	
1-G iSTATION Plate	White	IMF1W	Hummel	1
1-G 4-Port Keystone Plate	White	NSP14W	ONE	
A/V Connectors and Plate	es		Hubbell iSTATION™ & Cross Connect Solutions	•
Description	Color	Catalog Number	Front Loading Hubbell iSTATION™	
1-Port HDMI Frame	White	NS801W	Plates/Modules Style Line® Frames	
1-Port HDMI Frame	White	NS802W	X-END™ A/V Cabling Solution	-
HDMI Snap Fit	Black	SFHCBK	 Keystone Plates A/V Modules 	4
F-Connector Snap Fit	White	NSF70W	AV Keystone Connectors	
USB A-to-B Snap Fit	White	SFUSBABW	 Data Connections 	
Cat 6 Snap Fit Jack	White	NSJ6W	44	v
MOUNTING OPTIONS		TYPICAL APPLI	CATION	
Mounts to Sheetroo			INTERACTIVE WHITE BOARD EXAMPLE	
		Flat Panel/ "Smart	" Board	
QUI	UZ-			
	301		USB Audio Mideo	
		I Gerra La	COB Addio/ Video	
		PAN IN	Patch Cables IMBDS10W	15S6F
	E A		NSAV62M	· Fe
Mounts to Studs]		MINETW IMETW	SFUSE



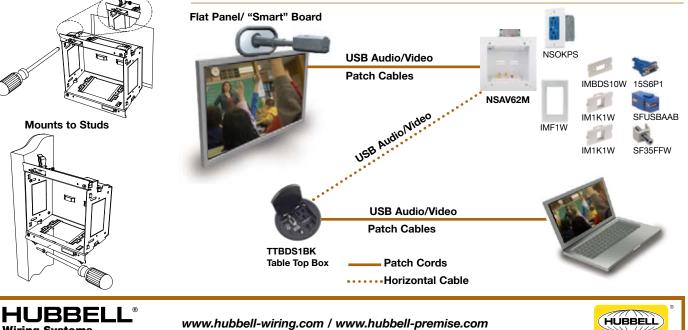

Hubbell Wiring Systems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484 • Phone (800) 288-6000 • FAX (800) 255-1031 Printed in U.S.A. Specifications subject to change without notice. © is a registered trademarks of Hubbell Incorporated.