

FWI 1000

HORIZONTAL ROLLER & HORIZONTAL ROLLER P ALUMINUM IMPACT WINDOW

MAXIMUM STRENGTH, LONGER LIFE, & CORROSION RESISTANT


FEATURES & BENEFITS:

- **Superior Strength and Durability:** 3 1/4" frame depth
- **Maximize prevention of air and water penetration:**
Double veined felts
- **Uniform external look throughout the building:** Uniform construction of all applications ensures windows with different DPs maintain the same external look
- **Protection against corrosion and longer life:** Stainless steel components available
- **Ease-of-operation, install and longer life:** Heavy duty adjustable dual tandem rollers
- **Durable powder coated finish**

SPECIFICATIONS:

Maximum Size	Glazing	Nominal Glass	Design Pressure
74" x 76" XO or OX	Impact	5/16" Annealed	± 60
74" x 76" XO or OX	Insulated Impact	5/8" IGU - 5/16" Ann	± 60
72" x 60" XO or OX	Impact	7/16" Heat Strength	± 80
74 1/8" x 63" XO or OX*	Impact	1/2" Heat Strength	+100/-120
111" x 76" XOX	Impact	5/16" Annealed	± 60
111" x 76" XOX	Insulated Impact	5/8" IGU - 5/16" Ann	± 60
120" x 63" XOX*	Impact	1/2" Heat Strength	+100/-120

*Indicates high rise sill

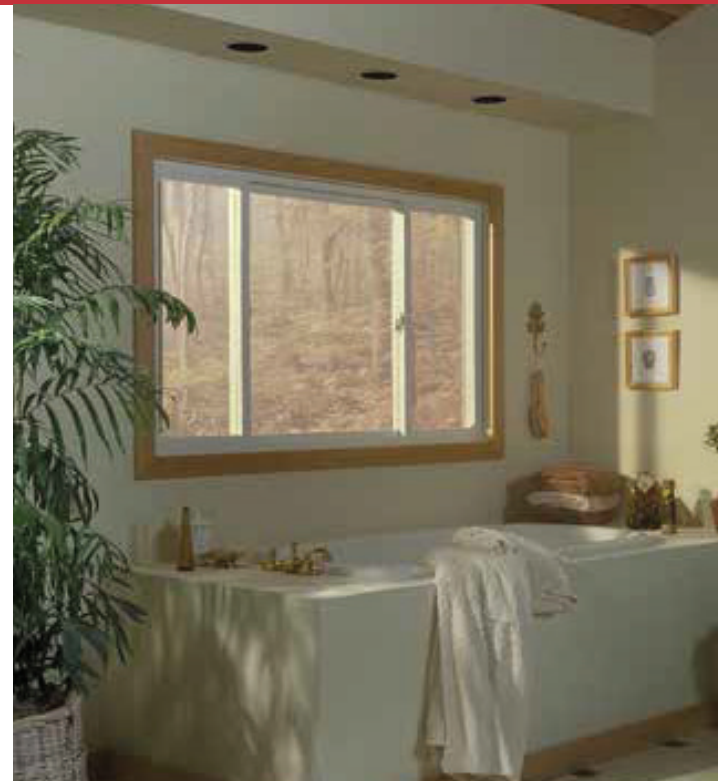

ADDITIONAL SPECIFICATIONS:

Muntin	Flat, Profile, GBG
Grid Options	Colonial, Prairie, Perimeter
Frame Depth	3 1/4"
Colors	White, Bronze
Approvals/ Certifications	HVHZ, NFRC, Florida Product Approval

