

Waste and Test Valve

General Description

The Waste and Test Valve is used to conduct testing and maintenance on sprinkler systems. It is also used as a drain valve to discharge water in the piping by changing the position of the valve. It includes a site glass to observe the flow.



Technical Data


- Working Pressure: 300 PSI
- Temperature range: 0°C - 80°C

Parts and Materials List

- ① Valve Body: Brass
- ② Bonnet: Brass
- ③ Stem: Stainless Steel
- ④ Bonnet Extension: Brass
- ⑤ Ball Seat: PTFE
- ⑥ Ball: Brass
- ⑦ Stem Seal: PTFE
- ⑧ O-Ring Seal: EPDM
- ⑨ Sight Glass: Acrylic
- ⑩ Sight Glass Gasket: EPDM
- ⑪ Lever: Steel (Vinyl coated)
- ⑫ Nut with Fiber: Steel
- ⑬ Bearing Ball Centering: Steel
- ⑭ Bearing Ball: Stainless Steel
- ⑮ Spring: Steel
- ⑯ Label Plate: Stainless Steel

Approvals

- FM™ Approved
- UL™ Listed

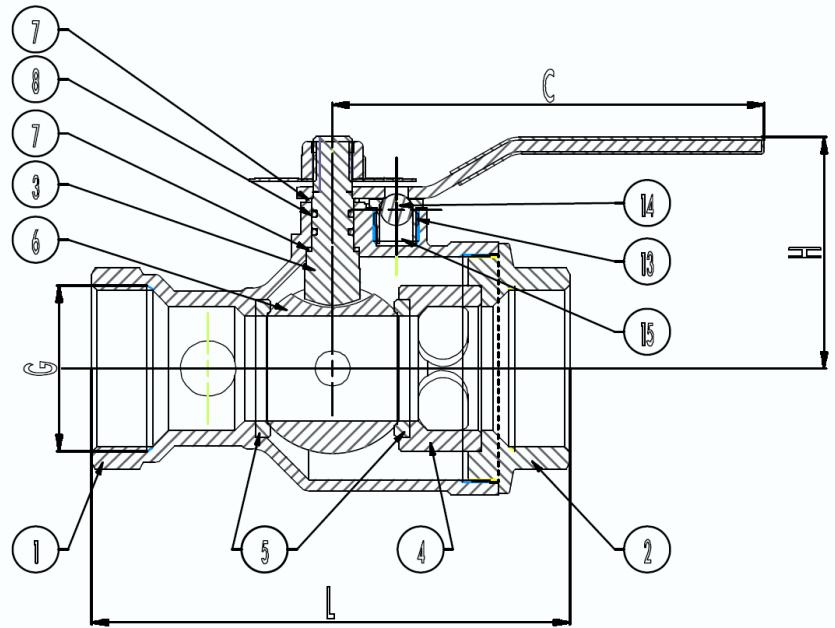

Dimensions

Size NB	25-32	40-50
G	1" - 1¼"	1½" - 2"
L	133	173
C	126	156
H	65	84
DN	60	92
Weight	1.4/1.3	3.5/3

