

Tech Data Sheet




Model	352PW-F (L)	352PW-F (M)	352PW-F (H)
Impeller (mm)	146	135.5	125
Liquid SG	1.2	1.5	1.9
Speed (rpm)	2900	2900	2900

Features

- Pumps come close coupled to standard 1.5 kW, 415 Volt motor (option: 240 Volt available).
- Non-Metallic wetted parts: ETFE Teflon Casing with Viton front casing O-ring. (option: EPDM O-ring).
- Liquid Temperatures up to 90°C.
- 32mm suction & 32mm discharge ports for flange and 1¼" suction & 1¼" discharge for BSP threaded

Performance Curves

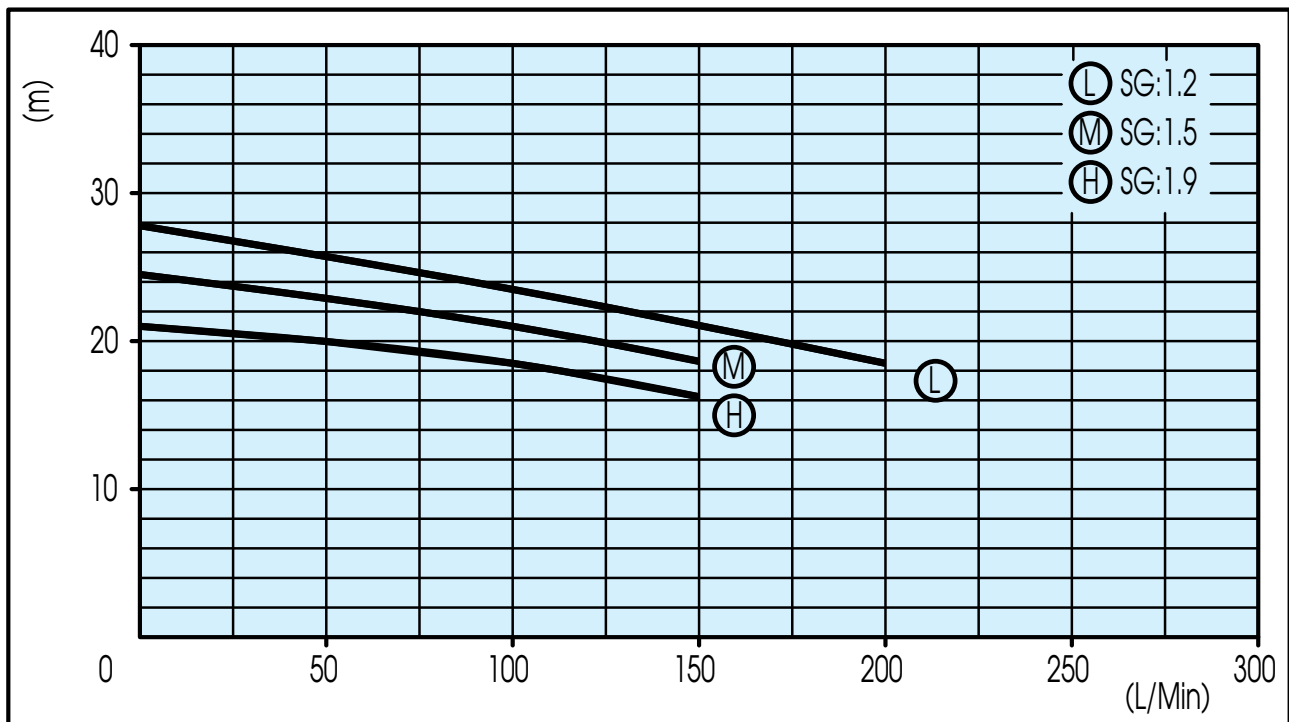

Dimensions

