




Tech Data Sheet

Features

- Pumps come close coupled to standard 0.75 kW, 415 Volt motor (option: 240 Volt available).
- Non-Metallic wetted parts: ETFE Teflon Casing with Viton front casing O-ring. (option: EPDM O-ring).
- Liquid Temperatures up to 90°C.
- 40mm suction discharge ports for flange and 1½" suction & discharge for BSP threaded

Model	401PW-F (S)	401PW-F(L)	401PW-F (M)	400PW-F (H)
Impeller (mm)	123	113	102	91
Liquid SG	1.0	1.2	1.5	1.9
Speed (rpm)	2900	2900	2900	2900

Performance Curves

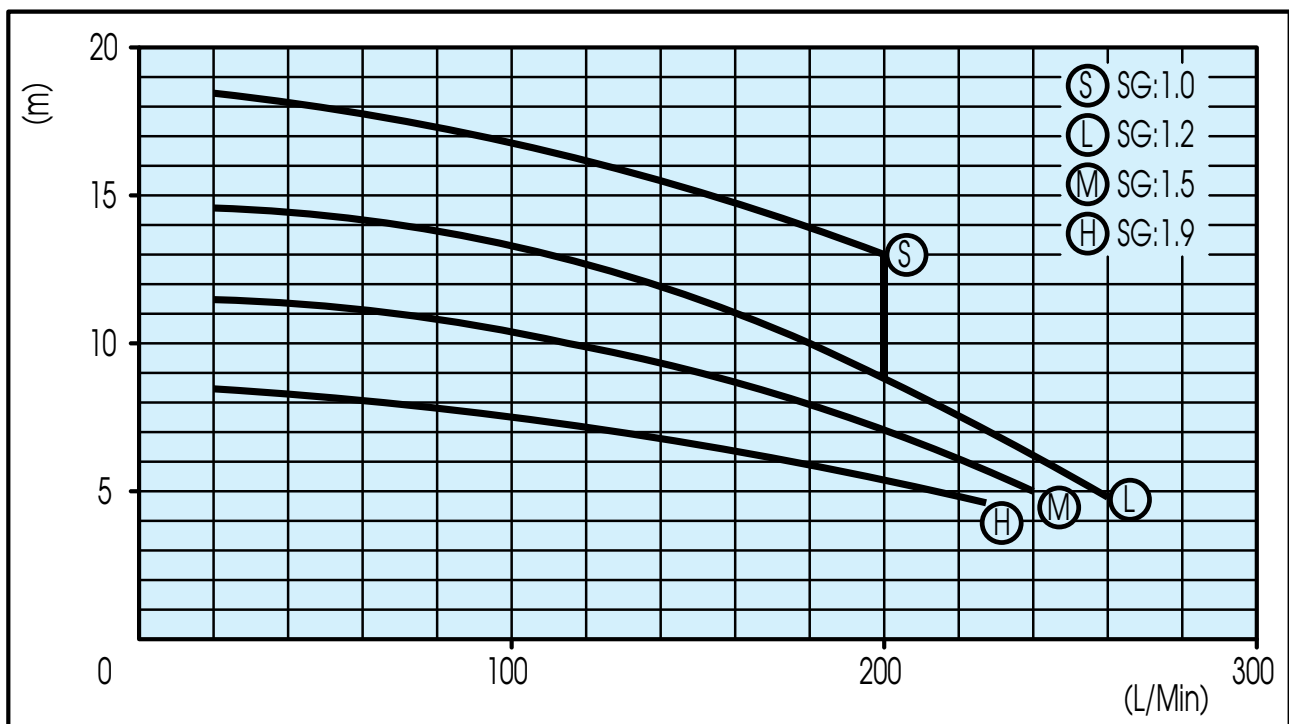

Dimensions

