




Tech Data Sheet

Features

- Pumps come close coupled to standard 1.5 kW, 415 Volt motor (option: 240 Volt available).
- Non-Metallic wetted parts: ETFE Teflon Casing with Viton front casing O-ring. (option: EPDM O-ring).
- Liquid Temperatures up to 90°C.
- 50mm suction & 40mm discharge ports for flange and 2" suction & 1½" discharge for BSP threaded

Model	402PW-F (S)	402PW-F (L)	402PW-F (M)	402PW-F (H)
Impeller (mm)	149	139	131	122
Liquid SG	1.0	1.2	1.5	1.9
Speed (rpm)	2900	2900	2900	2900

Performance Curves

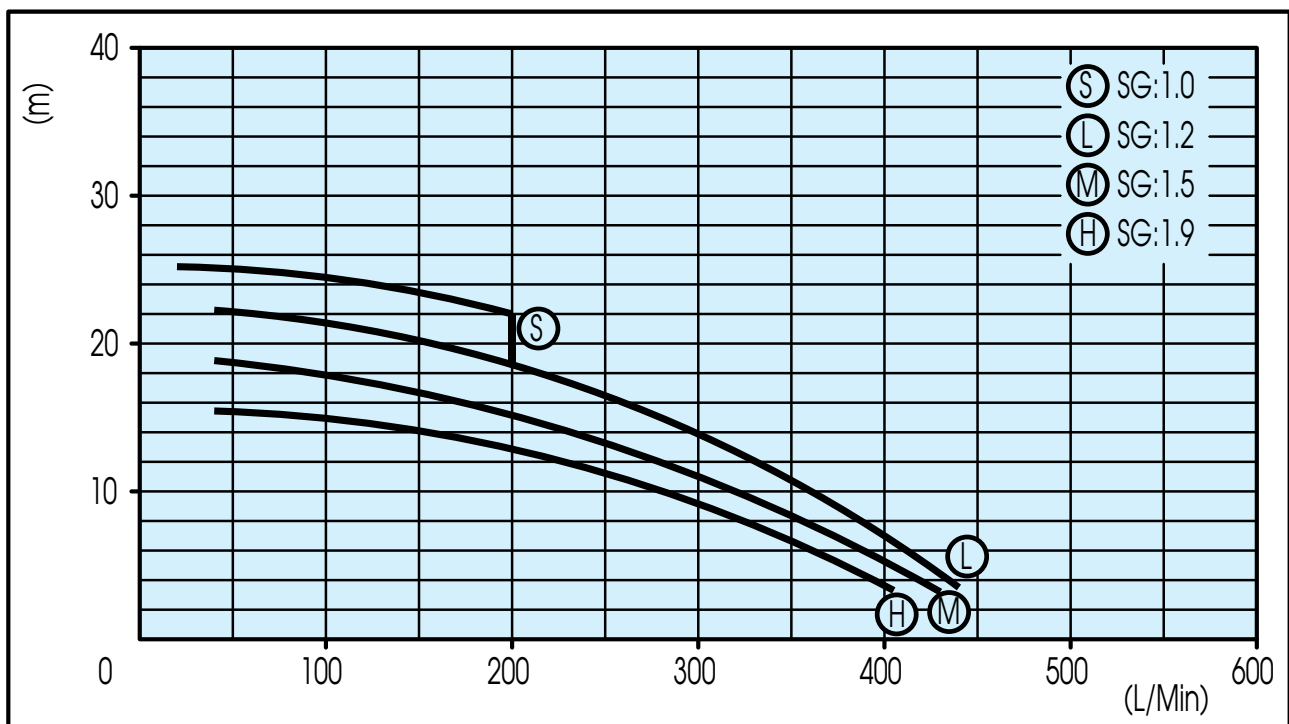

Dimensions

