

## Tech Data Sheet




Model	402PW-N (L)	402PW-N (M)
Impeller (mm)	148	142
Liquid SG	1.1	1.3
Speed (rpm)	2900	2900

### Features

- Pumps come close coupled to standard 1.5 kW, 415 Volt motor (option: 240 Volt available).
- Non-Metallic wetted parts: Polypropylene casing with Viton front casing O-ring. (option: EPDM O-ring)
- Suction lift up to 4m.
- Liquid Temperatures up to 70°C.
- 50mm suction and 40mm discharge flanges

### Performance Curves

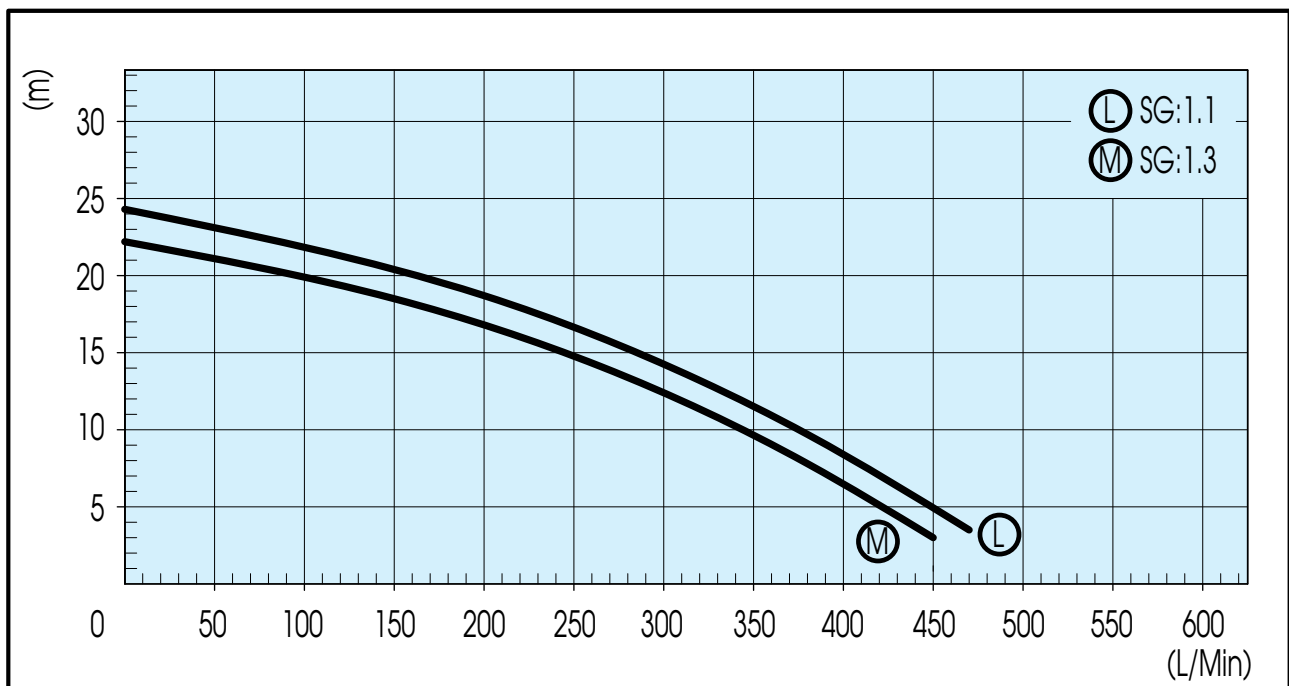

### Dimensions

