

## Tech Data Sheet




Model	405PW-N (L)	405PW-N (M)
Impeller (mm)	159	159
Liquid SG	1.1	1.3
Speed (rpm)	2900	2900

### Features

- Pumps come close coupled to standard 4.0 kW, 415 Volt motor
- Non-Metallic wetted parts: Polypropylene casing with Viton front casing O-ring. (option: EPDM O-ring)
- Suction lift up to 4m.
- Liquid Temperatures up to 70°C.
- 50mm suction and 40mm discharge flanges

### Performance Curves

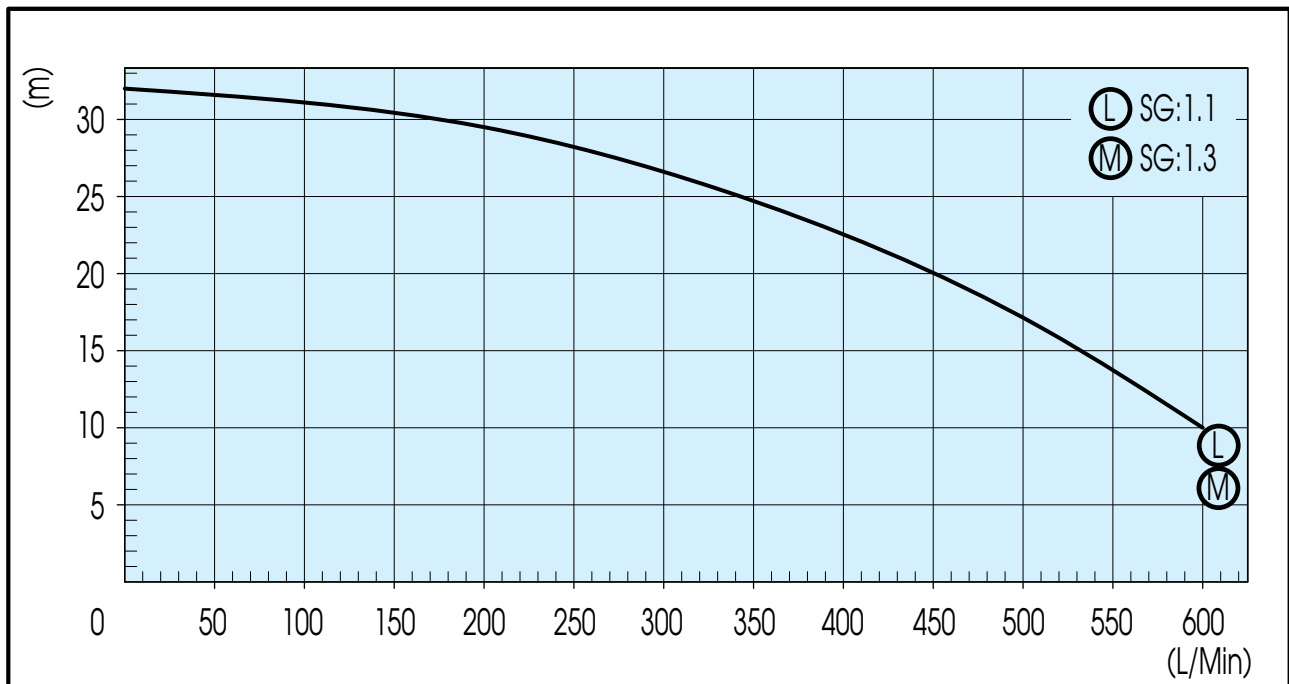

### Dimensions

