




Tech Data Sheet

Features

- Pumps come close coupled to standard 2.2 kW, 415 Volt motor
- Non-Metallic PPG (glass reinforced polypropylene) wetted parts and FPM (fluoroelastomer) front casing O-ring.
- Maximum head 30m.
- Liquid Temperatures up to 70°C.
- 2½" BSP suction and 2" discharge port or 65mm suction and 50mm discharge port.

Model	453PWH (S)	453PWH (L)	453PWH (M)	453PWH (H)
Impeller (mm)	151	146.5	138.5	132
Liquid SG	1.0	1.1	1.3	1.5
Speed (rpm)	2900	2900	2900	2900

Performance Curves

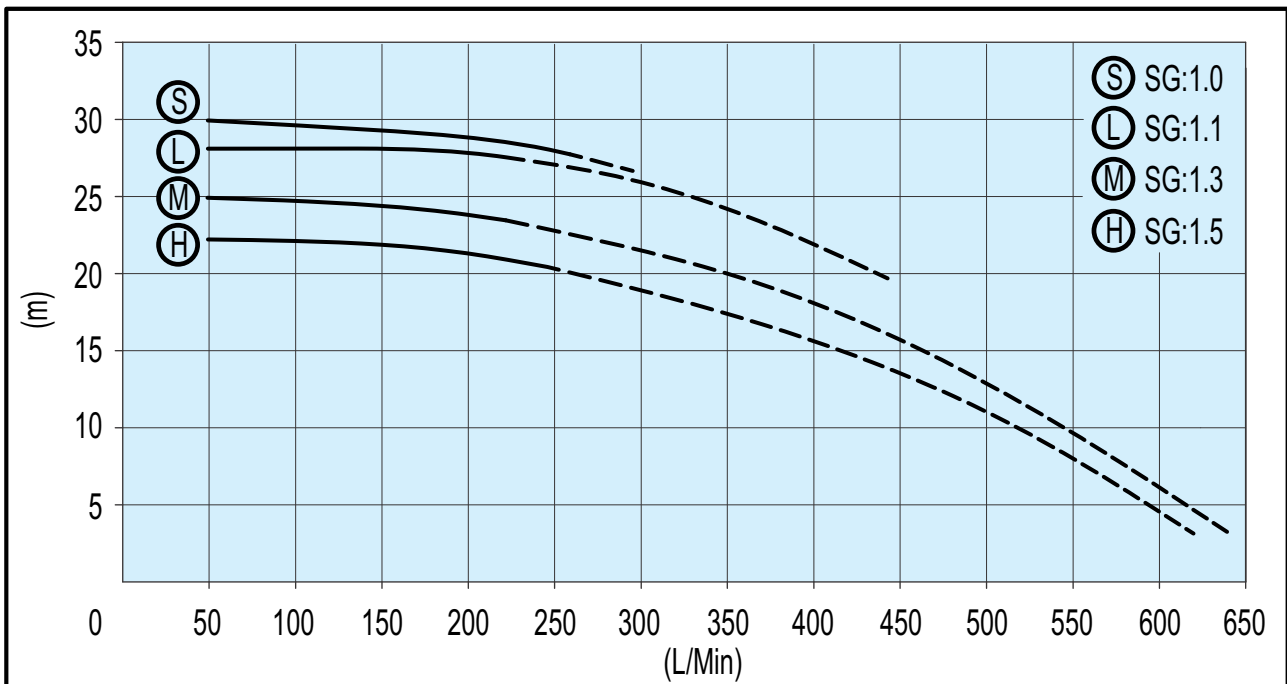

Dimensions

