




Tech Data Sheet

Model	455PWH (S)	455PWH (L)	455PWH (M)	455PWH (H)
Impeller (mm)	170	164.5	156	148.5
Liquid SG	1.0	1.1	1.3	1.5
Speed (rpm)	2900	2900	2900	2900

Features

- Pumps come close coupled to standard 3.7 kW, 415 Volt motor
- Non-Metallic PPG (glass reinforced polypropylene) wetted parts and FPM (fluoroelastomer) front casing O-ring.
- Maximum head 38.5m.
- Liquid Temperatures up to 70°C.
- 2½" BSP suction and 2" discharge port or 65mm suction and 50mm discharge port.

Performance Curves

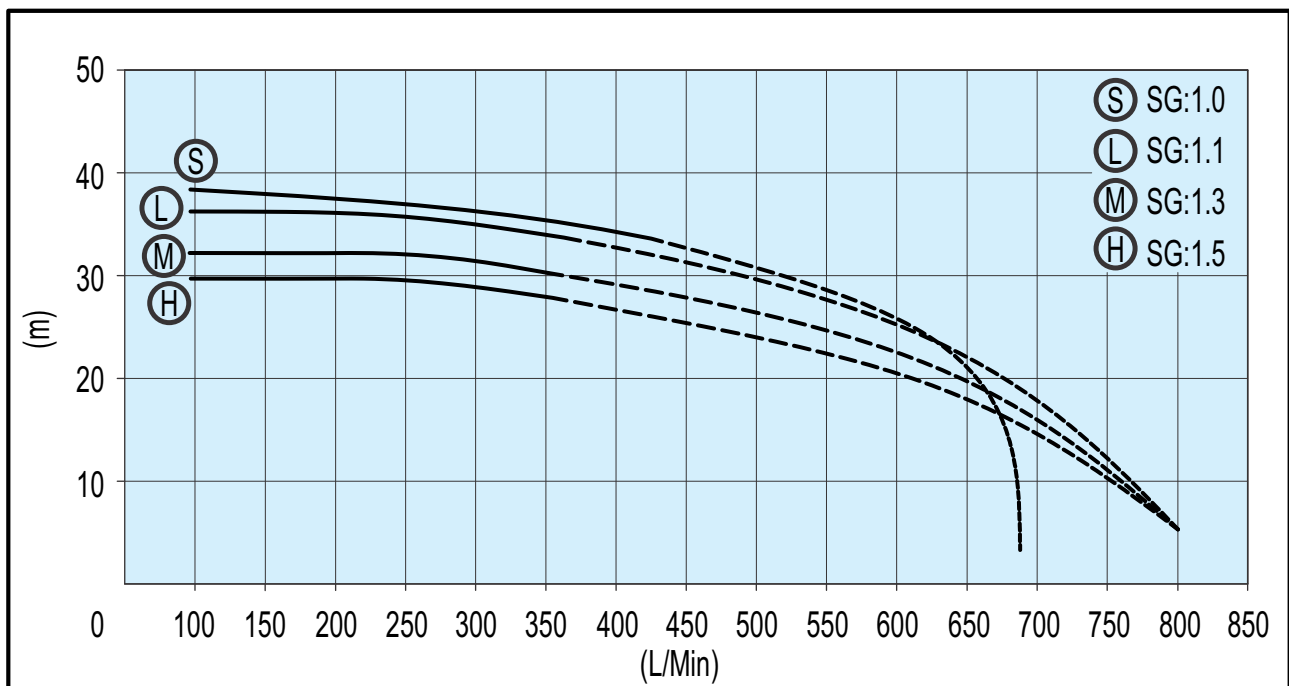

Dimensions

