




## Tech Data Sheet

### Features

- Pumps come close coupled to standard 7.5 kW, 415 Volt motor
- Non-Metallic PPG (glass reinforced polypropylene) wetted parts and FPM (fluoroelastomer) front casing O-ring.
- Maximum head 47.5m.
- Liquid Temperatures up to 50°C.
- 2½" BSP suction and 2" discharge port or 65mm suction and 50mm discharge port.

Model	5010PWH (S)	5010PWH (L)	5010PWH (M)	5010PWH (H)
Impeller (mm)	185	179	169.5	161.5
Liquid SG	1.0	1.1	1.3	1.5
Speed (rpm)	2900	2900	2900	2900

### Performance Curves

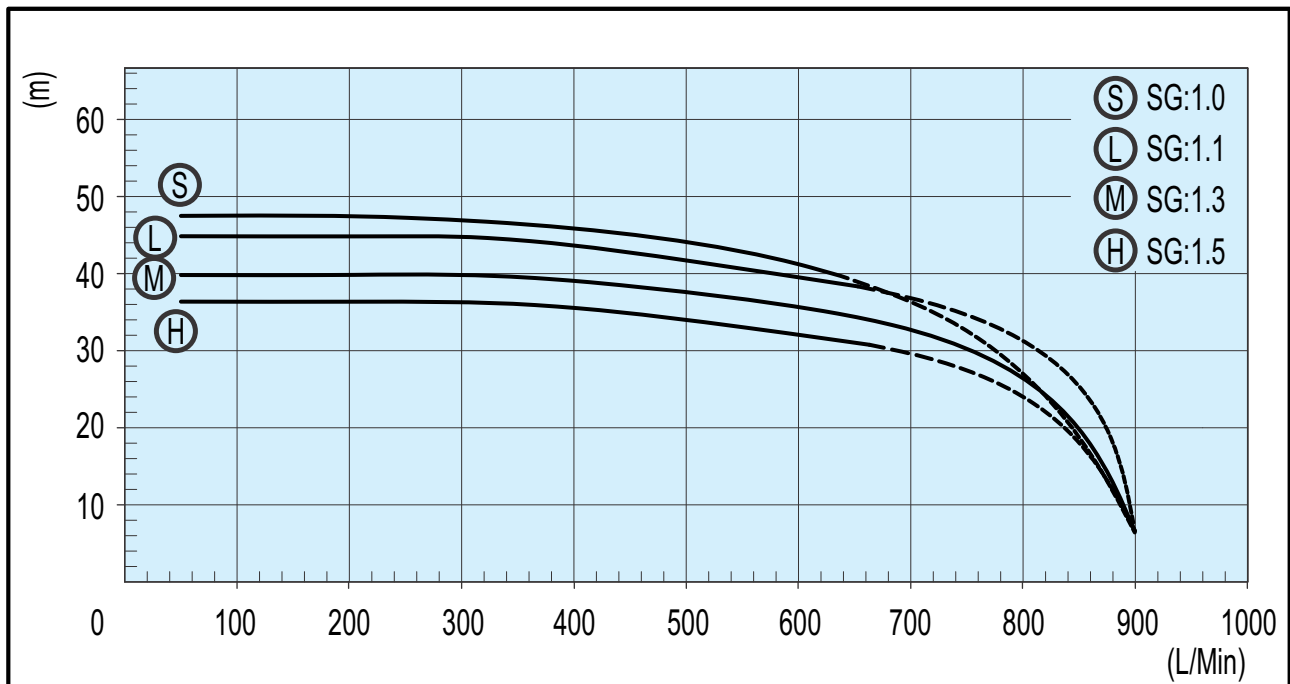

### Dimensions

