




## Tech Data Sheet

### Features

- Pumps come close coupled to standard 2.2 kW, 415 Volt motor
- Non-Metallic ETFE wetted parts and FPM (fluoroelastomer) front casing O-ring.
- Maximum head 30m.
- Liquid Temperatures up to 70°C.
- 2½" BSP suction and 2" discharge port or 65mm suction and 50mm discharge port.

Model	453PWH-F (S)	453PWH-F (L)	453PWH-F (M)	453PWH-F (H)
Impeller (mm)	151	142	132	122
Liquid SG	1.0	1.2	1.5	1.9
Speed (rpm)	2900	2900	2900	2900

### Performance Curves

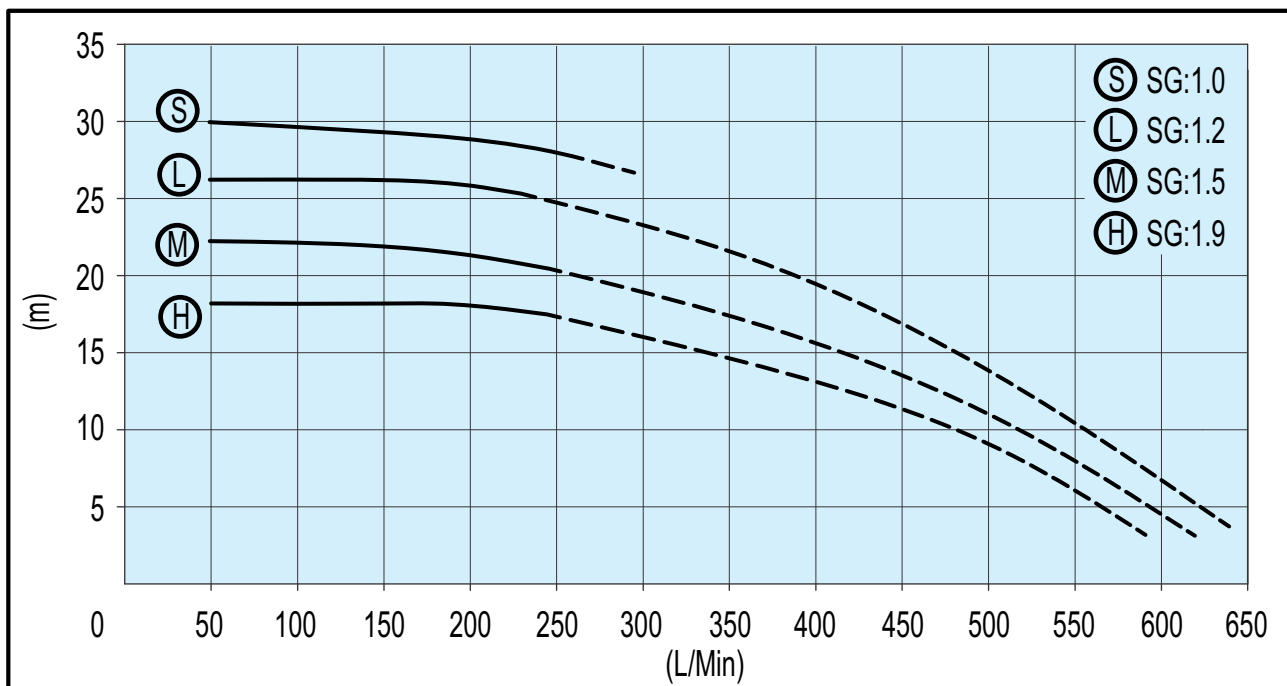

### Dimensions

