




Tech Data Sheet

Features

- Pumps come close coupled to standard 5.5 kW, 415 Volt motor
- Non-Metallic ETFE wetted parts and FPM (fluoroelastomer) front casing O-ring.
- Maximum head 45m.
- Liquid Temperatures up to 70°C.
- 2½" BSP suction and 2" discharge port or 65mm suction and 50mm discharge port.

| Model | 557PWH-F (S) | 557PWH-F (L) | 557PWH-F (M) | 557PWH-F (H) |
|---------------|--------------|--------------|--------------|--------------|
| Impeller (mm) | 180 | 169.5 | 157 | 145.5 |
| Liquid SG | 1.0 | 1.2 | 1.5 | 1.9 |
| Speed (rpm) | 2900 | 2900 | 2900 | 2900 |

Performance Curves

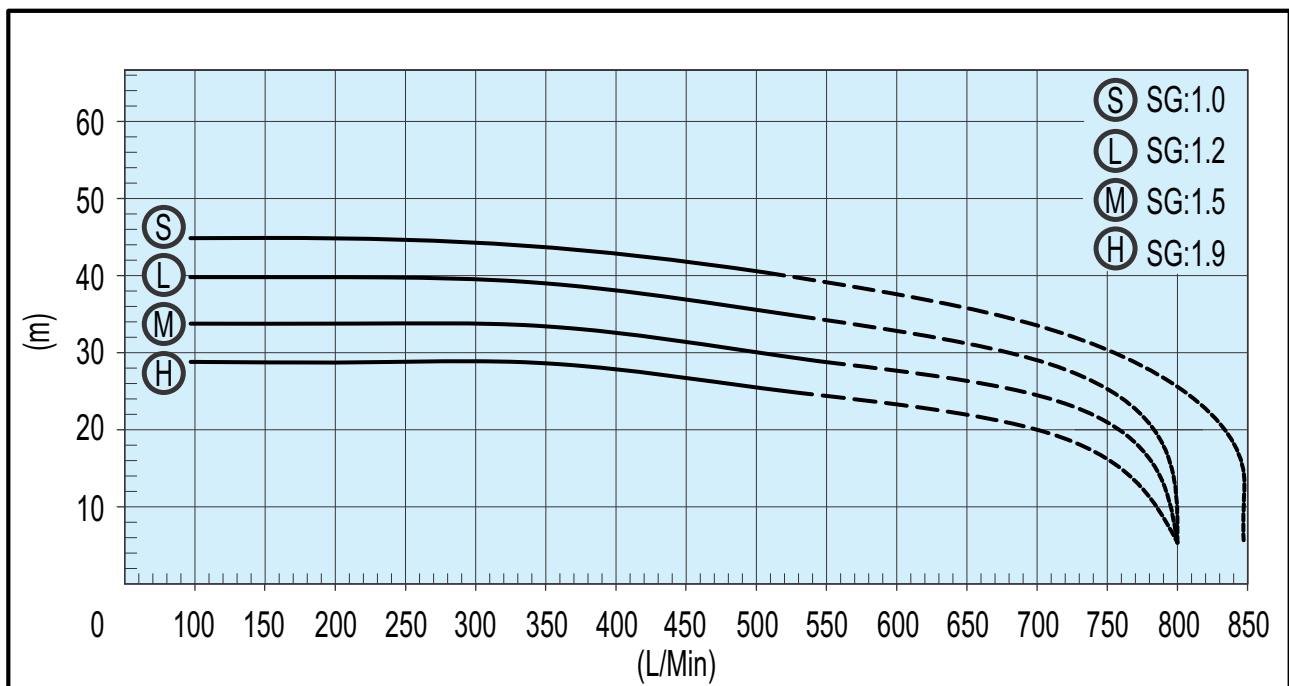

Dimensions

