




## Tech Data Sheet

### Features

- Pumps come close coupled to standard 7.5 kW, 415 Volt motor
- Non-Metallic ETFE wetted parts and FPM (fluoroelastomer) front casing O-ring.
- Maximum head 47.5m.
- Liquid Temperatures up to 50°C.
- 2½" BSP suction and 2" discharge port or 65mm suction and 50mm discharge port.

Model	5010PWH-F (S)	5010PWH-F (L)	5010PWH-F (M)	5010PWH-F (H)
Impeller (mm)	185	174	161.5	149.5
Liquid SG	1.0	1.2	1.5	1.9
Speed (rpm)	2900	2900	2900	2900

### Performance Curves

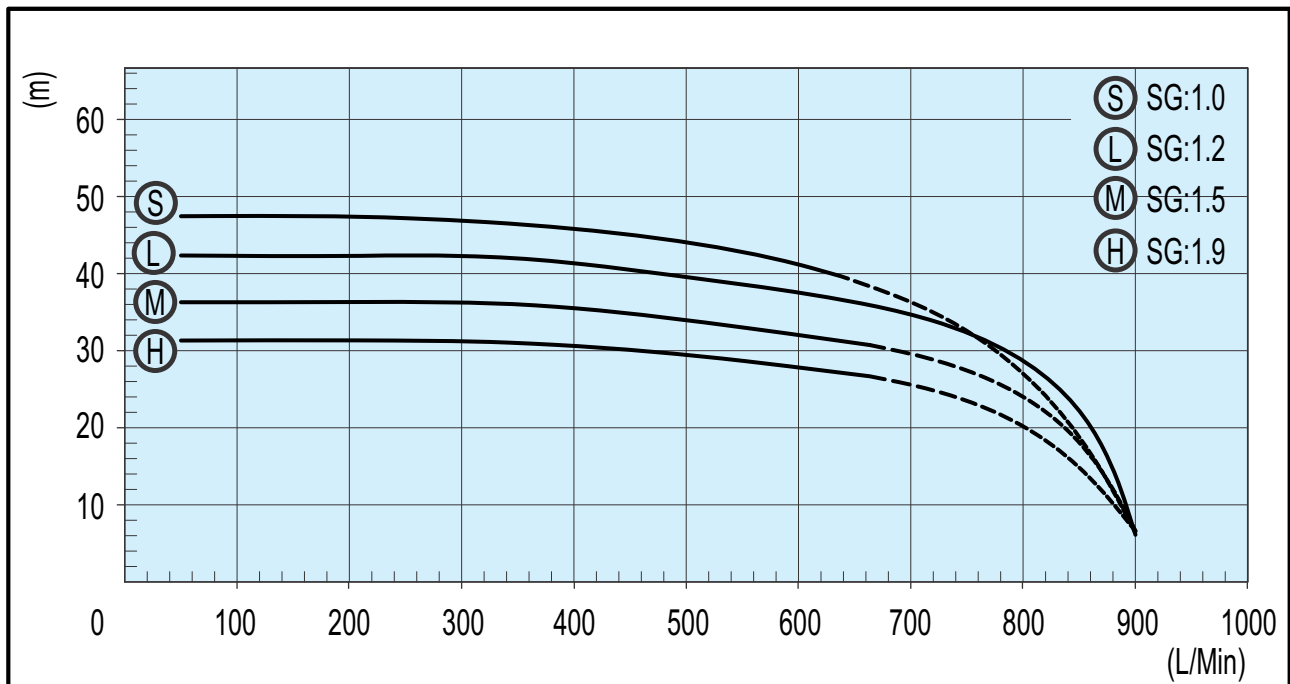

### Dimensions

