




Tech Data Sheet

Features

- Pumps come close coupled to standard 1.5kW, 415 Volt motor. (option: 240V)
- Non-Metallic wetted parts: Polypropylene casing with Viton front casing O-ring. (option: EPDM O-ring)
- Liquid Temperatures up to 70°C
- 32mm suction & 32mm discharge ports for flange and 1¼" suction & 1¼" discharge for BSP threaded

Model	352PW (S)	352PW (M)	352PW (H)
Impeller size (mm)	155	142	135.5
Liquid SG	1.0	1.3	1.5
Speed (rpm)	2900	2900	2900

Performance Curves

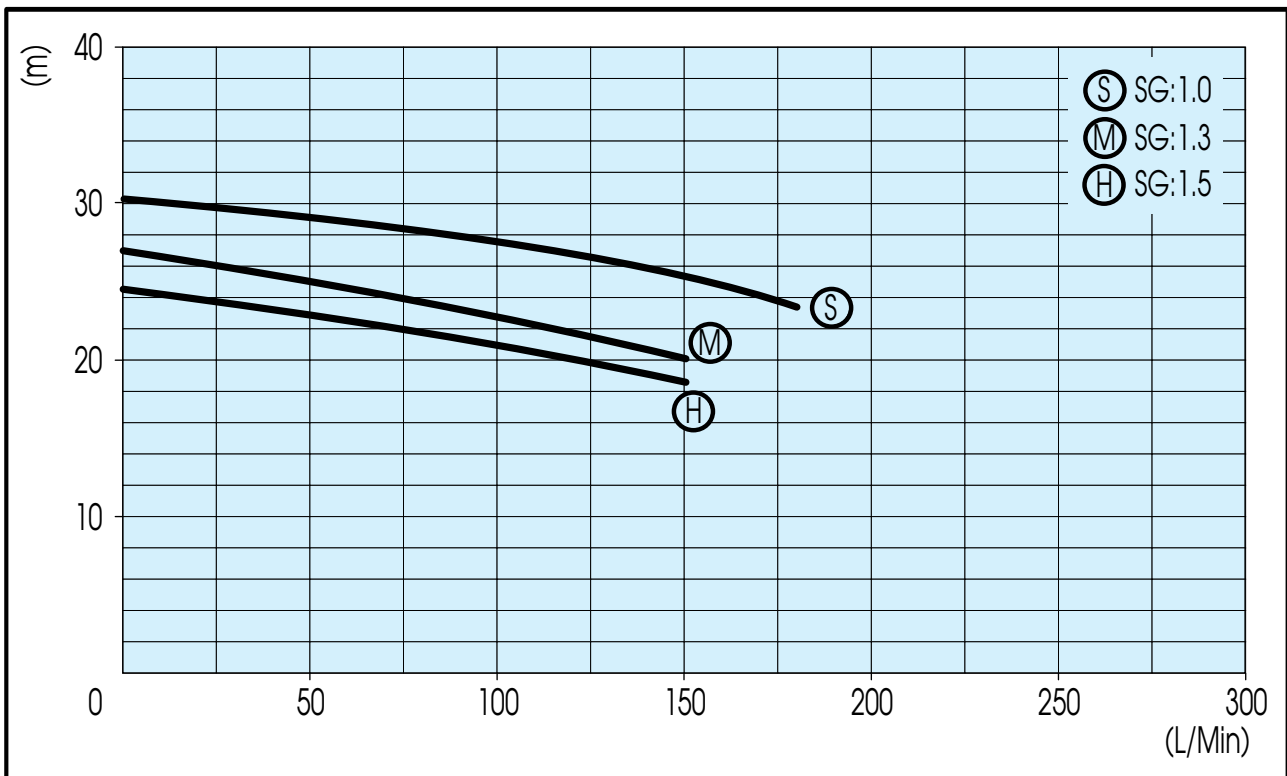

Dimensions

