




## Tech Data Sheet

### Features

- Pumps come close coupled to standard 0.37kW, 415 Volt motor. (option: 240V)
- Non-Metallic wetted parts: Polypropylene casing with Viton front casing O-ring. (option: EPDM O-ring)
- Liquid Temperatures up to 70°C
- 40mm suction & 40mm discharge ports for flange and 1½" suction & 1½" discharge for BSP threaded

Model	400PW (L)	400PW (M)	400PW (H)
Impeller size (mm)	103	94	89
Liquid SG	1.1	1.3	1.5
Speed (rpm)	2900	2900	2900

### Performance Curves

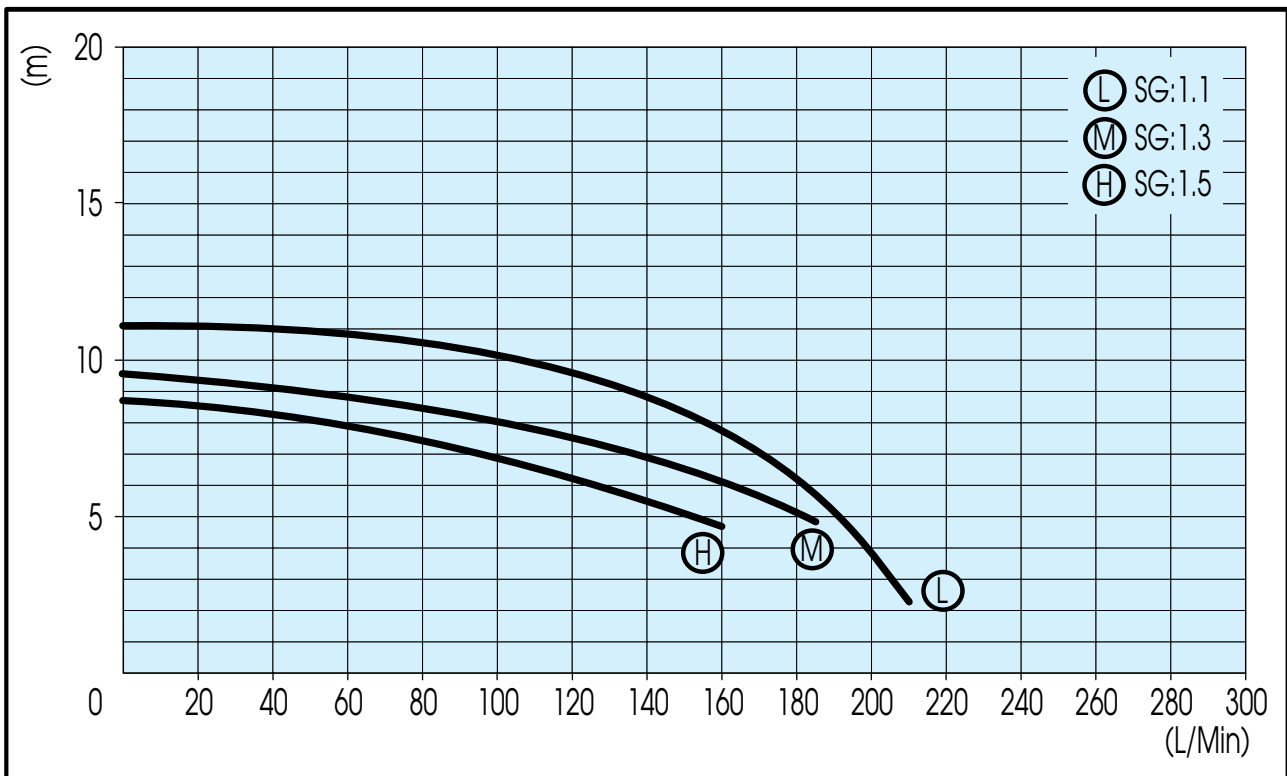

### Dimensions

