




Tech Data Sheet

Features

- Pumps come close coupled to standard 2.2kW, 415 Volt motor. (option: 240V)
- Non-Metallic wetted parts: Polypropylene casing with Viton front casing O-ring. (option: EPDM O-ring)
- Liquid Temperatures up to 70°C
- 50mm suction & 40mm discharge ports for flange and 2" suction & 1½" discharge for BSP threaded

Model	403PW (S)	403PW (L)	403PW (M)	403PW (H)
Impeller size (mm)	160	143	137	130
Liquid SG	1.0	1.1	1.3	1.5
Speed (rpm)	2900	2900	2900	2900

Performance Curves

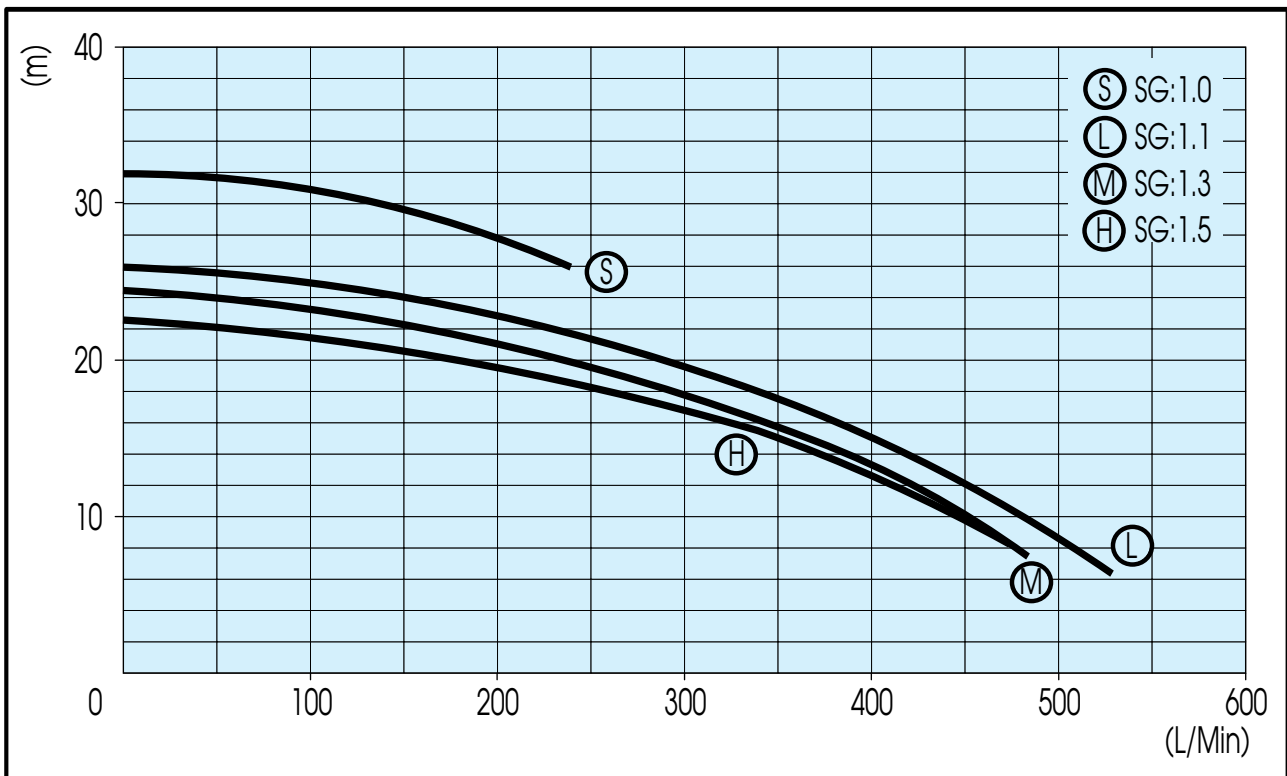

Dimensions

