




## Tech Data Sheet

### Features

- Pumps come close coupled to standard 5.5kW, 415 Volt motor.
- Non-Metallic wetted parts: Polypropylene casing with Viton front casing O-ring. (option: EPDM O-ring)
- Liquid Temperatures up to 70°C
- 65mm suction & 50mm discharge ports for flange and 2½" suction & 2" discharge for BSP threaded

Model	507PW (S)	507PW (L)	507PW (M)	507PW (H)
Impeller size (mm)	155	149	146	138
Liquid SG	1.0	1.1	1.3	1.5
Speed (rpm)	2900	2900	2900	2900

### Performance Curves

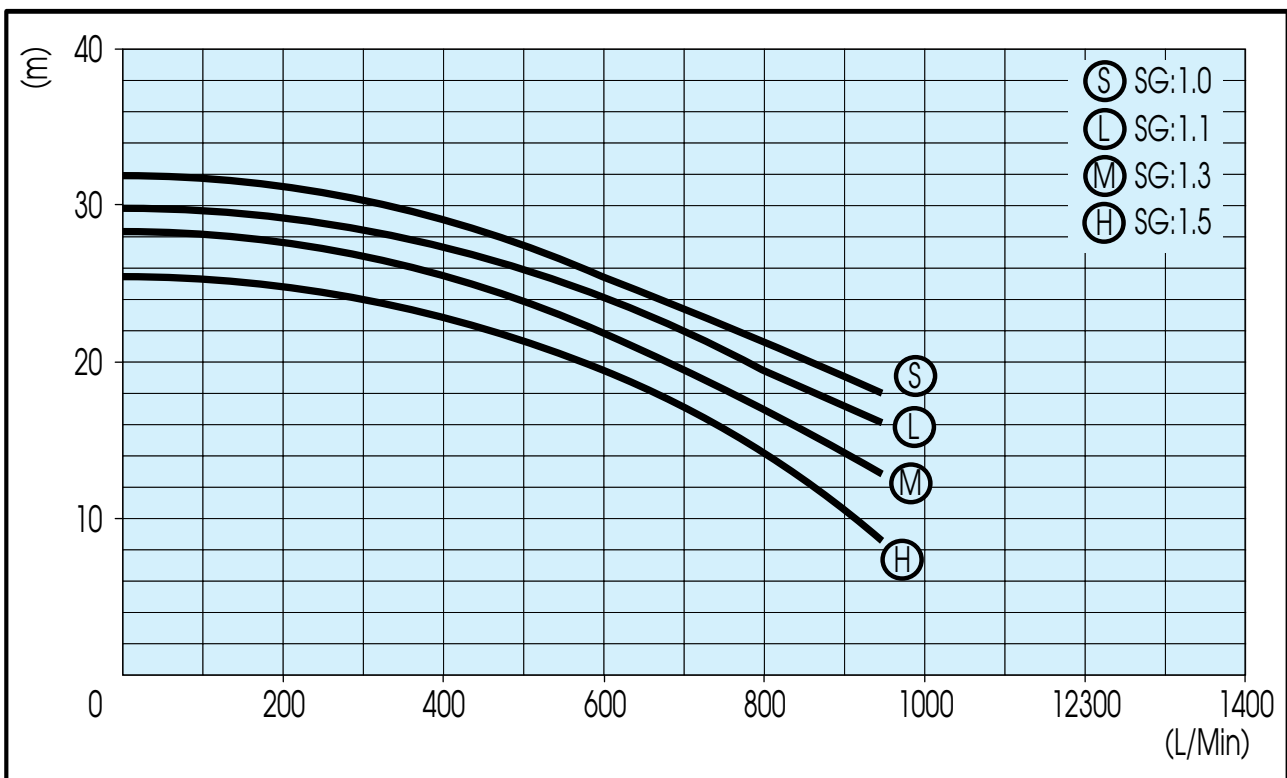

### Dimensions

