




## Tech Data Sheet

### Features

- Pumps come close coupled to standard 7.5kW, 415 Volt motor.
- Non-Metallic wetted parts: Polypropylene casing with Viton front casing O-ring. (option: EPDM O-ring)
- Liquid Temperatures up to 70°C
- 80mm suction & 65mm flanged discharge ports

Model	6510PW (L)	6510PW (M)	6510PW (H)
Impeller size (mm)	158	146	141
Liquid SG	1.1	1.3	1.5
Speed (rpm)	2900	2900	2900

### Performance Curves

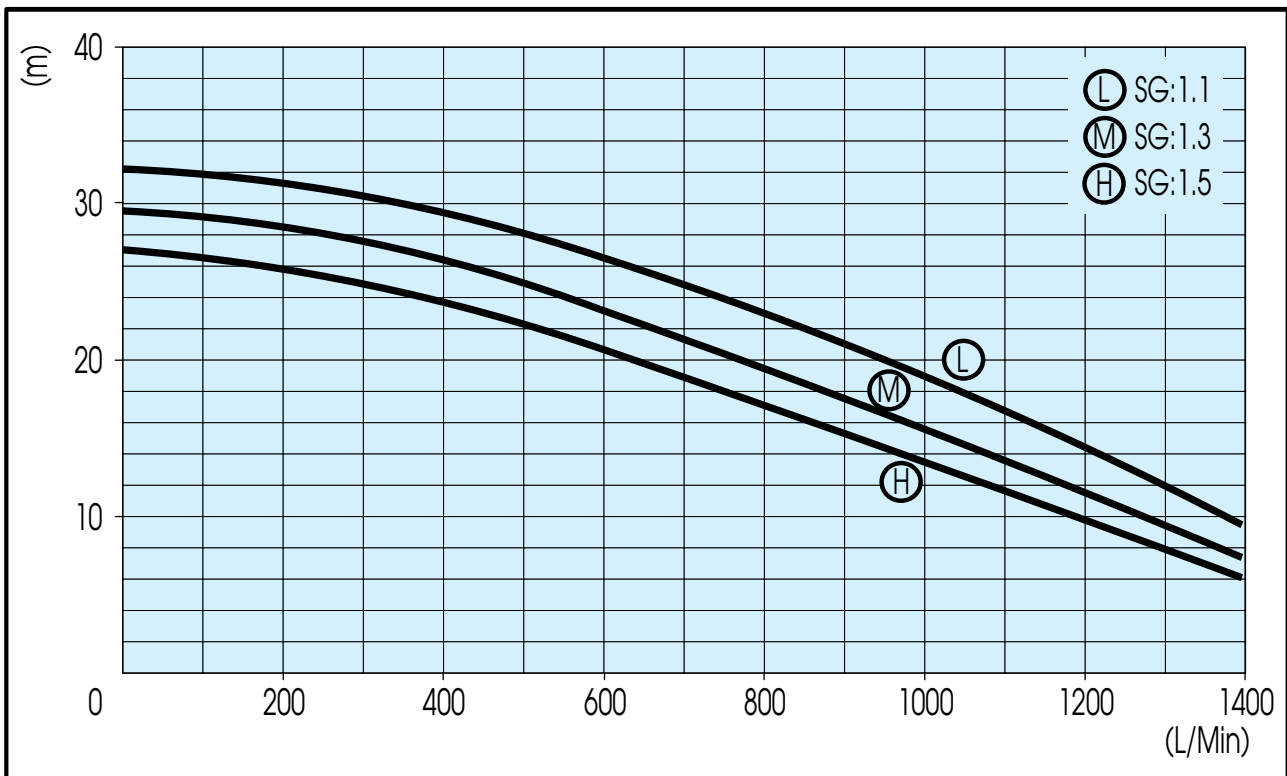

### Dimensions

