




Tech Data Sheet

Features

- Pumps come close coupled to standard 11.0kW, 415 Volt motor.
- Non-Metallic wetted parts: Polypropylene casing with Viton front casing O-ring. (option: EPDM O-ring)
- Liquid Temperatures up to 70°C
- 80mm suction & 65mm flanged discharge ports

Model	6515PW (L)	6515PW (M)	6515PW (H)
Impeller size (mm)	174	170	160
Liquid SG	1.1	1.3	1.5
Speed (rpm)	2900	2900	2900

Performance Curves

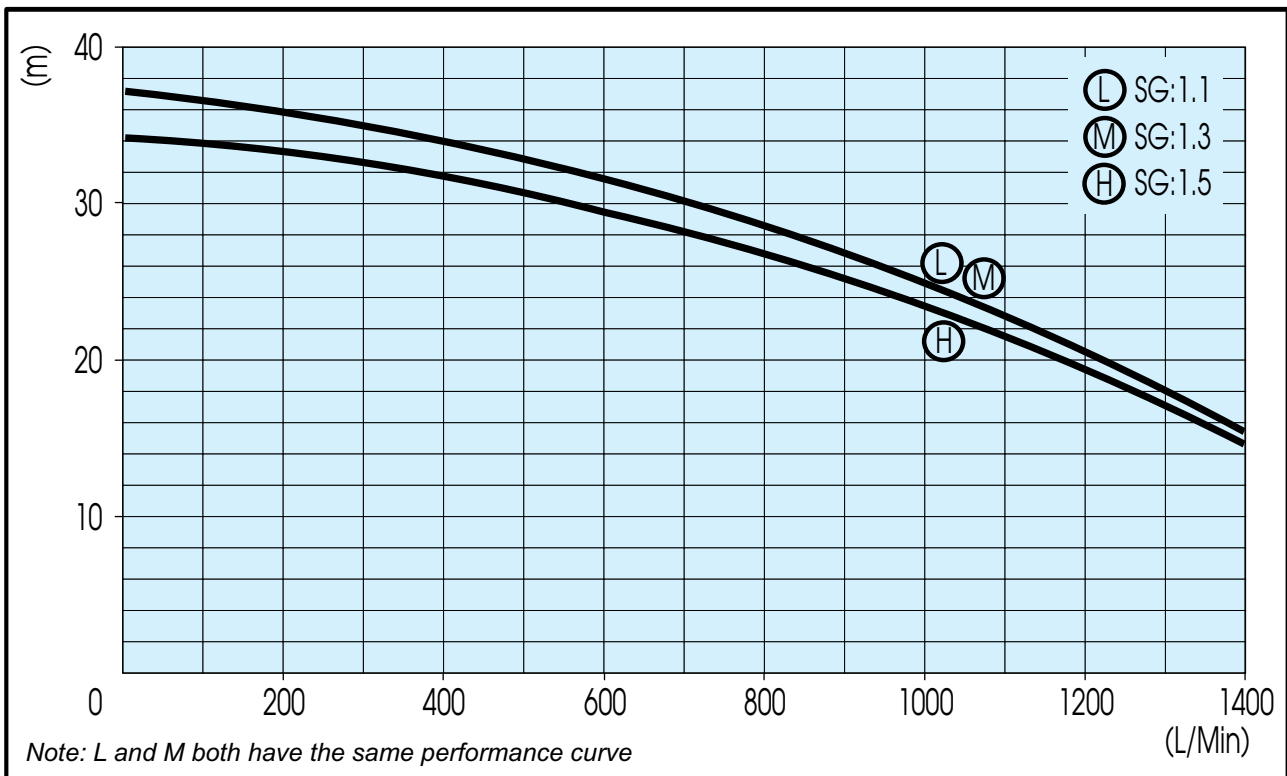

Dimensions

