




## Tech Data Sheet

### Features

- Pumps come close coupled to standard 4.0kW, 415 Volt motor.
- Non-Metallic wetted parts: Polypropylene casing with Viton front casing O-ring. (option: EPDM O-ring)
- Liquid Temperatures up to 70°C
- 80mm suction & 65mm flanged discharge ports

Model	655PW (L)	655PW (M)	655PW (H)
Impeller size (mm)	132	123	117
Liquid SG	1.1	1.3	1.5
Speed (rpm)	2900	2900	2900

### Performance Curves

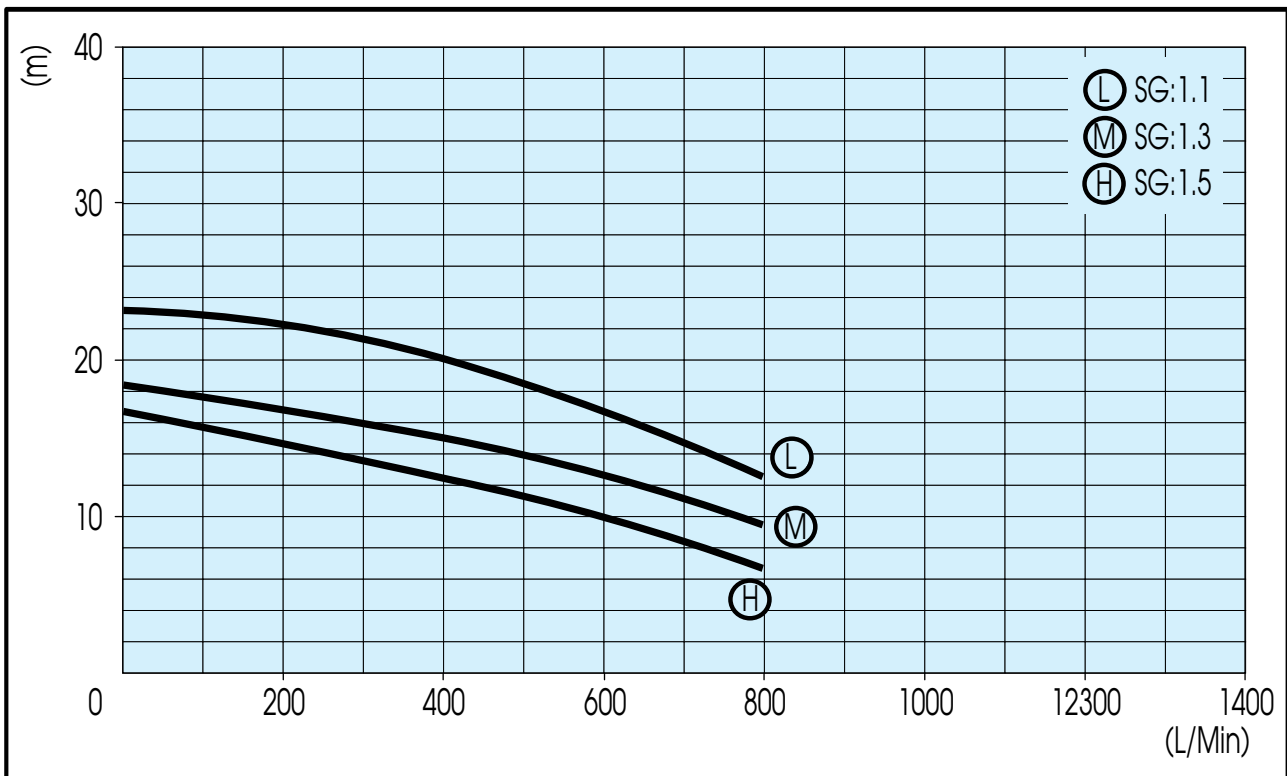

### Dimensions

