

Verderair VA 15



VA15AC

VERDERAIR

Technical data		
Weight [kg]	Acetal	3.5
	Polypropylene (PP)	2.9
	Kynar	3.9
Suction lift [mwc]	Dry	2.1*** / 3.7
	Wet	3.7*** / 6.4
Temperature [°C]	Acetal	5 - 65*
	Polypropylene	5 - 65
	Kynar	5 - 65**
Max. particle size [mm]		2.5
Non wetted material, centre section	Polypropylene	

* 82°C with Teflon diaphragms ** 107°C with Teflon diaphragms *** with Teflon balls

CODES VA 15 NO.2 NO.3 NO.4 NO.5

no.2 material of casing

- AC = Acetal
- CPP = Conductive (PP)
- PP = Polypropylene
- KY = Kynar

no.3 material of seat

- AC = Acetal
- PP = Polypropylene
- KY = Kynar
- SS = Stainless Steel



no.4 material of valve

- TF = Teflon
- SP = Santoprene
- SS = Stainless Steel
- HY = Hytrel
- BN = Buna N
- VT = Viton

no.5 material of diaphragm

- TF = Teflon
- SP = Santoprene
- BN = Buna N
- VT = Viton
- HY = Hytrel

II 2 GD c IIC T4

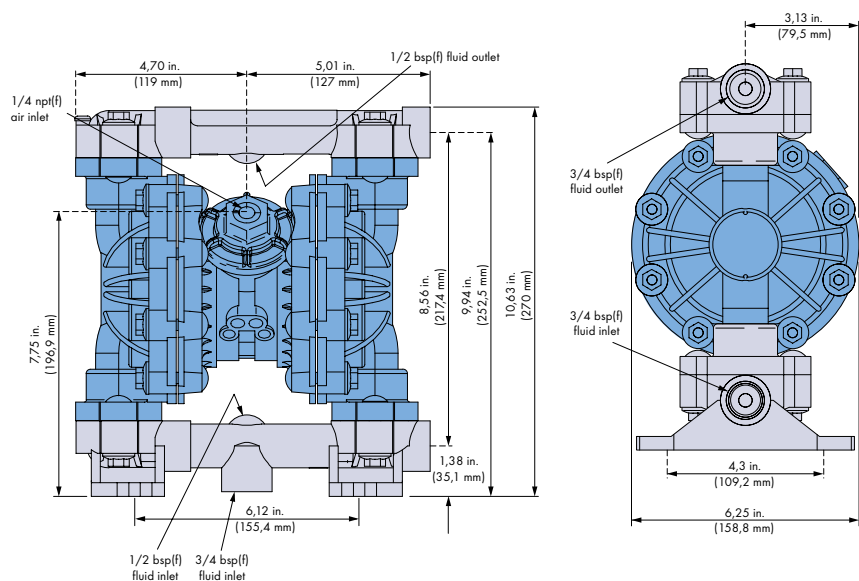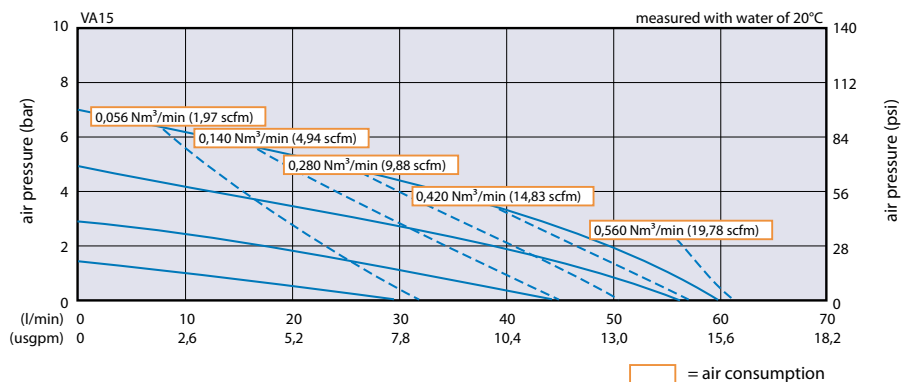

VA15nommet_Techno_Rev03-2011_(uk)

Find your local supplier at www.verderair.com

VERDER
passion for pumps