


VERDERAIR VA 40 metallic



Technical data		
Weight [kg]	Aluminium with Aluminium centre section	15
	Stainless Steel with Aluminium centre section	32.7
	Stainless Steel with Stainless Steel centre section	40
Suction lift [mwc]	Dry	3** / 3.7
	Wet	5.5** / 6.4
Temperature [°C]	Aluminium	5 - 65*
	Stainless Steel	5 - 65*
Max. particle size [mm]		4.8
Non wetted material, centre section	Epoxy coated Aluminium/Stainless Steel	

* 93°C with Teflon diaphragms ** with Teflon balls

- codes VA 40**
no.2 no.3 no.4 no.5
- no.2 material of casing
 AL = Aluminium
 SS = Stainless Steel
- no.3 material of seat
 PP = Polypropylene
 KY = Kynar
 SS = Stainless Steel
 HS = Hardened Steel
 HY = Hytrel
 SP = Santoprene
 GE = Geolast
 VT = Viton
 BN = Buna N
- no.4 material of valve
 AC = Acetal
 GE = Geolast
 HS = Hardened Steel
 HY = Hytrel
 SP = Santoprene
 TF = Teflon
 VT = Viton
 BN = Buna N
- no.5 material of diaphragm
 TF = Teflon
 HY = Hytrel
 SP = Santoprene
 VT = Viton
 GE = Geolast
 BN = Buna N

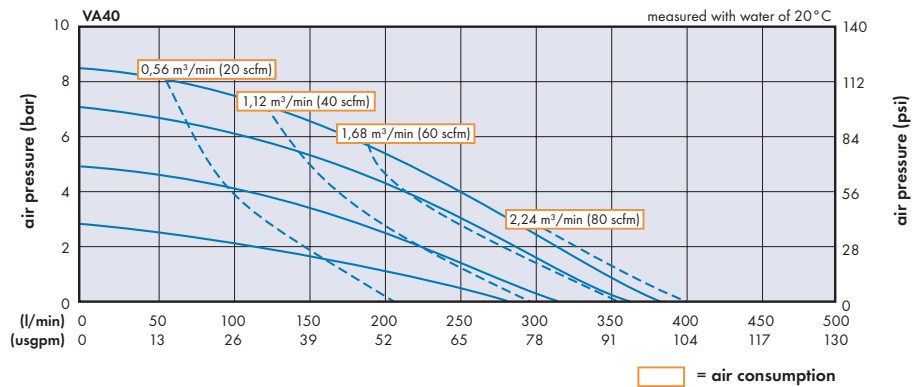

	Dimensions Aluminum pumps	Dimensions SST pumps
A	427 mm	412.5 mm
B	465 mm	451 mm
C	497 mm	482.5 mm

