

Verderair

VA 50 non-metallic



VA50PP

VERDERAIR

Technical data		
Weight [kg]	Polypropylene with Aluminium centre section	22
	Polypropylene with Stainless Steel centre section	32
	Kynar with Aluminium centre section	31
	Kynar with Stainless Steel centre section	41
Suction lift [mwc]	Dry	2.1** / 3.7
	Wet	3.7** / 6.4
Temperature [°C]	Polypropylene (PP)	5 - 65
	Kynar	5 - 65*
Max. particle size [mm]		6.3
Non wetted material, centre section	Epoxy coated Aluminium/Stainless Steel	

* 93°C with Teflon diaphragms ** with Teflon balls

CODES VA 50 NO.2 NO.3 NO.4 NO.5

no.2 material of casing

- PP = Polypropylene
- ⚠ CPP = Conductive (PP)
- KY = Kynar

no.3 material of seat



- PP = Polypropylene
- HY = Hytrel
- SS = Stainless Steel
- GE = Geolast
- HS = Hardened Steel
- KY = Kynar
- SP = Santoprene

no.4 material of valve

- TF = Teflon
- HY = Hytrel
- HS = Hardened Steel
- AC = Acetal
- SP = Santoprene
- VT = Viton
- GE = Geolast

no.5 material of diaphragm

- TF = Teflon
- HY = Hytrel
- SP = Santoprene
- VT = Viton
- GE = Geolast

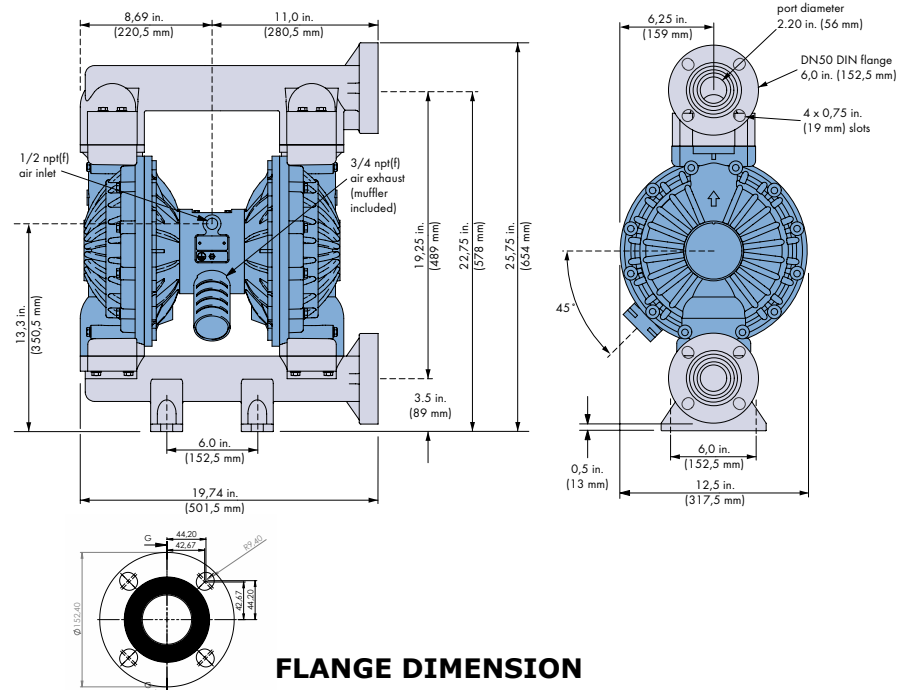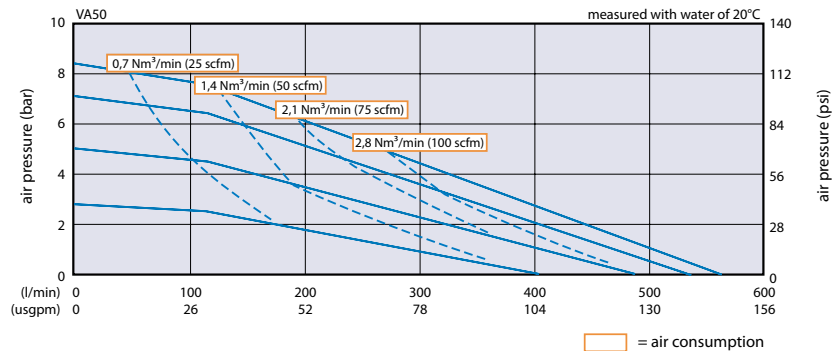

VA50nonmet_Techno_Rev03-2011_(uk)



Find your local supplier at www.verderair.com

