




MORE PROTECTION. MORE FUNCTIONALITY.

IN MORE ENVIRONMENTS.



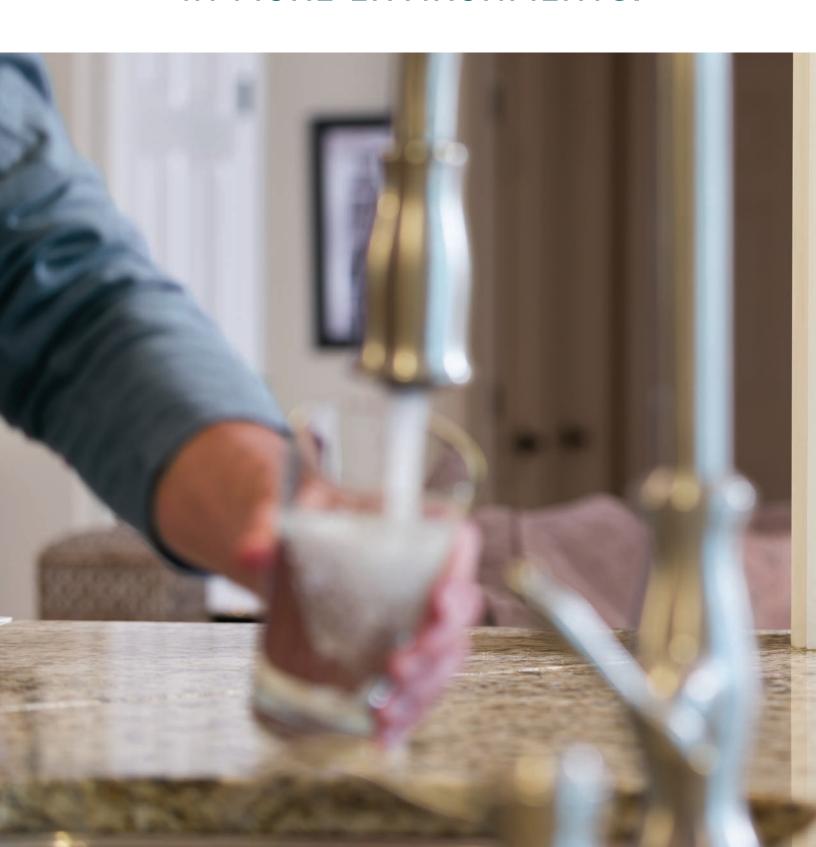







LEGRAND

置INNOVATIONS 曼 COMING

At Legrand, we've been providing real solutions to real problems for so long, it's almost second nature. From the world's first GFCI receptacle in 1971, to the introduction of ground-breaking SafeLock® Protection some 30 years later, we've been delivering GFCI innovations designed to enhance safety, shorten installation times, and increase productivity for more than four decades.

Now, we've reset the bar on electrical safety again with our newest innovation: the P&S Self-Test GFCI Receptacle.

Designed to exceed UL requirements, it's **the only GFCI that tests itself every three seconds**—instead of the industry standard three hours—providing a level of reliable electrical protection that's unprecedented. The new device is also designed with a thinner profile to make more room for wires in the wall box. That means it's not only safer, but easier to install as well.



Self-Test GFCI Technology—conducts an automatic test **EVERY THREE SECONDS**, ensuring it's always ready to protect.



High-impact-resistant, thermoplastic construction for superior strength and durability.

Thinner profile speeds _____ installation by leaving more room for wires in the box.

Tamper-resistant automatic shutter system prevents young children from inserting common household objects. Black shutters essentially disappear into the background for an invisible effect preferred by end-users.

Auto-ground clip assures a positive ground to metal box.

FSUL Listed (Federal Specification WC596)

Ground terminal back-wire clamp for fast installation.

The most durable GFCI available. Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.

The indicator light flashes if the device fails the self-test, signaling that the GFCI should be replaced.



Two back-wire holes per termination add wiring flexibility, eliminate pigtailing, and save box space.

Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.

A SAFETY SOLUTION FOR EVERY HOME



IT ALL COMES DOWN TO KEEPING PEOPLE SAFE.


Our broad Pass & Seymour product line includes all the residential GFCI devices you'd expect from an industry leader including options from our radiant® collection. In addition to stylish choices, you'll also find truly innovative solutions you need to meet special requirements, including:

Spec Grade Tamper-Resistant Audible Alarm Combination Switch Combination Night Light Weather-Resistant RoHS-Compliant

TAMPER-RESISTANT NIGHT LIGHT/GFCI COMBINATION

Ensures safety and convenience

- Sealed night light with Lexan® lens prevents tampering
- LED illumination with a 20+ year life expectancy means no bulbs to change
- Photocell turns night light ON in the dark-OFF in the daylight
- Performs a self-test every 3 seconds 1597NTLTRWCC4

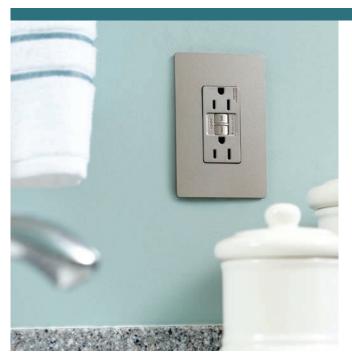



Helps keep children safe

- Patented shutter system—now with black "invisi-shutters" that disappear for an invisible effect—helps prevent insertion of foreign objects
- Patented SafeLock® Protection—if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected
- Meets *NEC*® requirements
- Performs a self-test every 3 seconds

1597TRW



AUDIBLE ALARM GFCI

Protection you can see and hear

- Provides an audible warning of a tripped condition and that power to a receptacle is interrupted
- Ideal for basement sump pumps and other areas where a GFCI indicator light might not be readily apparent
- Meets *NEC*® requirements
- Performs a self-test every 3 seconds

1597TRAW


ROHS-COMPLIANT GFCI

Designed to meet environmental regulations

- Meet all the requirements of the Restriction of Hazardous Substances regulations
- Provides the same functionality and protection as our traditional GFCI
- Performs a self-test every 3 seconds 1597TRRW



FASTER COMMERCIAL INSTALLATIONS

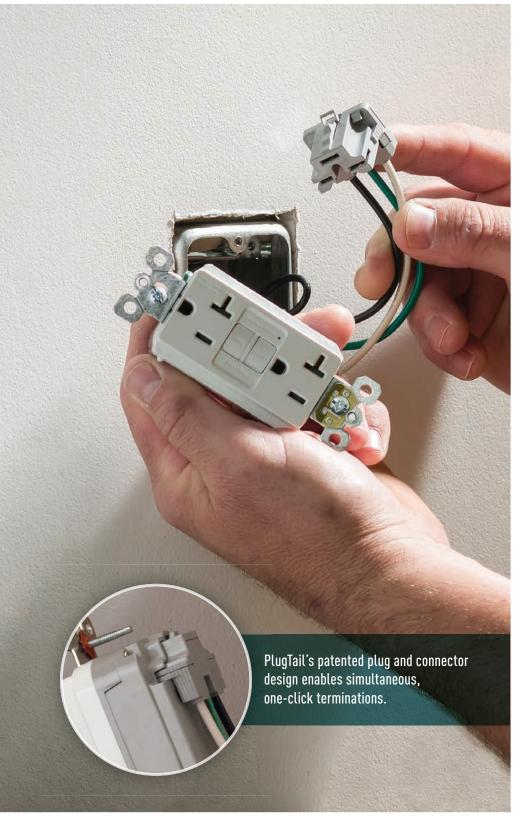

SPEED AND RELIABILITY ARE THE KEY TO SUCCESSFUL COMMERCIAL INSTALLATIONS.

Our GFCIs are designed to meet those needs...and then some. That's because we've been offering GFCIs longer than anyone else, so we know what you need to do the job right the first time. Take a look at our innovative line—we think you'll find a solution that perfectly matches your needs. Every time.

Spec Grade PlugTail®
Hospital Grade Audible Alarm
Tamper-Resistant Isolated Ground
Weather-Resistant Combinations
NAFTA-Compliant Dead Front
RoHS-Compliant

PLUGTAIL® GFCI

The fastest-installing GFCI ever. Hands down.

- Beats tough deadlines on any commercial job
- No exposed terminals creates a finger-safe application before, during, and after installation
- Available in Spec Grade, Hospital Grade, Tamper-Resistant, and LED/Night Light combinations
- Performs a self-test every 3 seconds
- Enables fast, affordable upgrades as space evolves

PT2097TRW





SPECIFICATION GRADE GFCI

- 20 amp designed for heavy commercial use
- High-impact-resistant, thermoplastic construction for superior strength and durability
- The most durable GFCI available. Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles
- Performs a self-test every 3 seconds 2097TRW

NAFTA-COMPLIANT GFCIs

Designed to meet government regulations

- GFCIs that meet the requirements of the Buy American provision of the American Recovery and Reinvestment Act
- Provides the same functionality and protection as our traditional GFCI
- Performs a self-test every 3 seconds



PORTABLE GFCIs

- Rugged polycarbonate housing stands up to impacts and hard use
- Water-resistant design for wet and corrosive indoor/outdoor environments
- Automatic reset ensures continuous power for pumps, portable signs, lights and engine heaters
- Watertight rubber cord grommets seal the GFCI from the environment



1594PC2M

Residential Self-Test GFCI Receptacles

| *COLO | OR DESIGNATION |
|-------|----------------|
| - 1 | Ivory |
| W | White |
| GRY | Gray |
| BK | Black |
| RED | Red |
| LA | Light Almond |
| NI | Nickel |
| _ | Brown |
| DB | Dark Bronze |
| 0 | Orange |
| | |

| CATALOG NO. | DESCRIPTION | RATINGS | | COLORS | NEMA |
|---------------|---|---------|-----|------------------------------|---------|
| OAIALOO NOI | | Α. | V. | COLONS | Config. |
| 1597TR* | radiant® Spec Grade Tamper-Resistant 15 Amp Duplex GFCI | 15 | 125 | I, W, —, BK, LA, NI, DB | 5-15R |
| 1597* | radiant® Spec Grade 15 Amp Duplex GFCI | 15 | 125 | I, W, —, GRY, BK, RED, LA | 5-15R |
| 1597TRA* | radiant® Audible Alarm Tamper-Resistant Duplex GFCI | 15 | 125 | I, W, —, LA | 5-15R |
| 1597SWTTR*CC4 | radiant® Combination Tamper-Resistant Single-Pole Switch/GFCI | 15 | 125 | I, W, BK, LA | 5-15R |
| 1597NTLTR*CC4 | radiant® Combination Tamper-Resistant 15 Amp Night Light/GFCI | 15 | 125 | I, W, BK, LA, NI, DB | 5-15R |
| 1597TRWR* | radiant® Spec Grade Weather-Resistant 15 Amp Duplex GFCI | 15 | 125 | I, W, —, GRY, BK, LA | 5-15R |
| 1597TRR* | RoHS-Compliant radiant® Spec Grade Tamper-Resistant 15 Amp Duplex GFCI | 15 | 125 | I, W, LA | 5-15R |

Third-Party Compliance:

cULus Listed, File Number E42190, Standard UL498 & UL943, Federal Specification WC596

Commercial Self-Test GFCI Receptacles

| CATALOG NO. | DESCRIPTION | RAT | INGS | COLORS | NEMA Config. |
|--------------|--|-----|------|------------------------------|-----------------|
| CATALOG NO. | | Α. | V. | | |
| 2097TR* | radiant® Spec Grade Tamper-Resistant 20 Amp Duplex GFCI | 20 | 125 | I, W, —, GRY, BK, RED, LA | 5-20R |
| 2097* | radiant® Spec Grade 20 Amp Duplex GFCI | 20 | 125 | I, W, —, GRY, BK, RED, LA | 5-20R |
| 1597HGTR* | Haspital Crade Tempor Projectont Duplay CCCI | 15 | 125 | I, W, —, GRY, BK, | 5-15R |
| 2097HGTR* | Hospital Grade Tamper-Resistant Duplex GFCI | 20 | 125 | RED, LA | 5-20R |
| 1597HG* | – Hospital Grade Duplex GFCI | 15 | 125 | I, W, GRY, BK, RED, LA | 5-15R |
| 2097HG* | | 20 | 125 | I, W, —, GRY, BK, RED, LA | 5-20R |
| 1597IGTR* | Spec Grade Isolated Ground Tamper-Resistant | 15 | 125 | I, W, LA, 0 | 5-15R |
| 2097IGTR* | Duplex GFCI | 20 | 125 | I, W, GRY, LA, O | 5-20R |
| 1597IGHGTR* | Hospital Grade Isolated Ground Tamper-Resistant | 15 | 125 | 0 | 5-15R |
| 2097IGHGTR* | Duplex GFCI | 20 | 125 | I, W, RED, LA, O | 5-20R |
| 2097NTLTR* | radiant® Combination Tamper-Resistant 20 Amp Night Light/GFCI | 20 | 125 | I, W, GRY, LA | 5-20R |
| 2097HGNTLTR* | Hospital Grade Combination Tamper-Resistant Night Light/GFCI | 20 | 125 | I, W, GRY, RED, LA | 5-20R |
| 2097TRWR* | radiant® Spec Grade Weather-Resistant 20 Amp Duplex GFCI | 20 | 125 | I, W, —, GRY, BK, LA | 5-20R |

Third-Party Compliance:

cULus Listed, File Number E42190, Standard UL498 & UL943, Federal Specification WC596

Commercial Self-Test GFCI Receptacles

| CATALOG NO. | DESCRIPTION | RATINGS | | COLORS | NEMA |
|-------------|---|---------|-----|---------------|---------|
| | | Α. | V. | COLONS | Config. |
| 2097TRA* | radiant® Spec Grade Audible Alarm Tamper-Resistant 20 Amp Duplex GFCI | 20 | 125 | I, W, — LA | 5-20R |
| 1597HGTRA* | Hospital Grade Audible Alarm Tamper-Resistant | 15 | 125 | —, LA | 5-15R |
| 2097HGTRA* | Duplex GFCI | 20 | 125 | I, W, RED, LA | 5-20R |
| 2097TRR* | RoHS-Compliant radiant® Spec Grade Tamper-Resistant 20 Amp Duplex GFCI | 20 | 125 | I | 5-20R |

| I Ivory W White GRY Gray BK Black |
|-----------------------------------|
| GRY Gray |
| |
| RK Black |
| Didek |
| RED Red |
| LA Light Almond |
| NI Nickel |
| - Brown |
| DB Dark Bronze |
| O Orange |

Third-Party Compliance:

cULus Listed, File Number E42190, Standard UL498 & UL943, Federal Specification WC596

Dead Front Self-Test GFCI Receptacles

| CATALOG NO. | DESCRIPTION | RATINGS | | COLORS | NEMA |
|-------------|--|---------|-----|--------------|---------|
| | | Α. | V. | | Config. |
| 2087 | radiant® Spec Grade Dead Front GFCI 1-1/2 HP Motor Control Rating | 20 | 125 | I, W, BK, LA | 5-20R |

Third-Party Compliance:

cULus Listed, File Number E42190, Standard UL498 & UL943

PlugTail® Self-Test GFCI Receptacles

| CATALOG NO. | DESCRIPTION | RATINGS | | COLORS | NEMA |
|----------------|---|---------|-----|------------------------------|---------|
| - CAIALOO NO. | | Α. | V. | OOLONS | Config. |
| PT1597* | Spec Grade Duplex GFCI | 15 | 125 | I, W, GRY, LA | 5-15R |
| PT2097* | | 20 | 125 | I, W, —, GRY, BK, RED, LA | 5-20R |
| PT1597TR* | Spec Grade Tamper-Resistant Duplex GFCI | 15 | 125 | I, W, GRY, RED, LA | 5-15R |
| PT2097TR* | | 20 | 125 | I, W, —, GRY, RED, LA | 5-20R |
| PT1597HG* | Hospital Grade Duplex GFCI | 15 | 125 | W, RED, LA | 5-15R |
| PT2097HG* | | 20 | 125 | I, W, —, GRY, BK, RED, LA | 5-20R |
| PT1597HGTR* | | 15 | 125 | I, W, RED, LA | 5-15R |
| PT2097HGTR* | Hospital Grade Tamper-Resistant Duplex GFCI | 20 | 125 | I, W, GRY, BK, RED, LA | 5-20R |
| PT2097NTLTR* | Spec Grade Tamper-Resistant Combination Night Light/GFCI | 20 | 125 | I, W | 5-20R |
| PT1597HGNTLTR* | Hospital Grade Tamper-Resistant Combination | 15 | 125 | I, RED | 5-15R |
| PT2097HGNTLTR* | Night Light/GFCI | 20 | 125 | I, W, GRY, LA | 5-20R |

Third-Party Compliance:

cULus Listed, File Number E42190, Standard UL498 & UL943, Federal Specification WC596





©2017 Legrand BR1241 All Rights Reserved 04/17 EMA/RRDTP

NAFTA-Compliant Self-Test GFCI Receptacles



| CATALOG NO. | DESCRIPTION | RAT | INGS | COLORS | NEMA Config. |
|-------------|---|-----|------|--------------------------|-----------------|
| | | A. | V. | | |
| 1597TRNA* | NAFTA-Compliant radiant® Spec Grade | 15 | 125 | I, W, GRY, LA | 5-15R |
| 2097TRNA* | Tamper-Resistant Duplex GFCI | 20 | 125 | I, W, GRY, LA | 5-20R |
| 2097NA* | NAFTA-Compliant radiant® Spec Grade 20 Amp Duplex GFCI | 20 | 125 | I, W, —, GRY, LA, BL | 5-20R |
| 2097HGTRNA* | NAFTA-Compliant Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI | 20 | 125 | I, W, RED, LA | 5-20R |
| 2097HGNA* | NAFTA-Compliant Hospital Grade 20 Amp Duplex GFCI | 20 | 125 | I, W, —, GRY, RED, LA | 5-20R |
| 1597TRWRNA* | NAFTA-Compliant radiant® Tamper-Resistant | 15 | 125 | I, W, —, LA, | 5-15R |
| 2097TRWRNA* | Weather-Resistant Duplex GFCI | 20 | 125 | I, W, GRY, LA | 5-20R |

| *COLO | OR DESIGNATION |
|-------|----------------|
| - 1 | Ivory |
| W | White |
| GRY | Gray |
| BK | Black |
| RED | Red |
| LA | Light Almond |
| NI | Nickel |
| _ | Brown |
| DB | Dark Bronze |
| 0 | Orange |
| BL | Blue |
| | |

Third-Party Compliance:

cULus Listed, File Number E42190, Standard UL498 & UL943, Federal Specification WC596

NAFTA-Compliant PlugTail® Self-Test GFCI Receptacles 🔑



| CATALOG NO. | DESCRIPTION | RATINGS | | COLORS | NEMA |
|------------------|---|---------|-----|----------------|---------|
| | DESCRIPTION | Α. | V. | COLONS | Config. |
| PT1597NA* | NAFTA-Compliant Spec Grade Duplex GFCI | 15 | 125 | W, GRY, LA | 5-15R |
| PT2097NA* | | 20 | 125 | W, BK, LA | 5-20R |
| PT2097TRNA* | NAFTA-Compliant Spec Grade Tamper-Resistant 20 Amp Duplex GFCI | 20 | 125 | I, W, LA | 5-20R |
| PT2097HGNA* | NAFTA-Compliant Hospital Grade 20 Amp Duplex GFCI | 20 | 125 | I, W, GRY, RED | 5-20R |
| PT2097HGTRNA* | NAFTA-Compliant Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI | 20 | 125 | I, W, GRY | 5-20R |
| PT1597NTLTRNA* | NAFTA-Compliant Spec Grade | 15 | 125 | W | 5-15R |
| PT2097NTLTRNA* | Tamper-Resistant Combination Night Light/Duplex GFCI | 20 | 125 | I, W | 5-20R |
| PT2097HGNTLTRNA* | NAFTA-Compliant Hospital Grade Tamper- Resistant Combination Night Light/Duplex GFCI | 20 | 125 | I | 5-20R |

Third-Party Compliance:

cULus Listed, File Number E42190, Standard UL498 & UL943, Federal Specification WC596



Electrical Wiring Systems

P.O. Box 4822 Syracuse, NY 13221-4822 800.776.4035 www.legrand.us/PassandSeymour

570 Applewood Crescent Vaughan, Ontario L4K 4B4 905.738.9195 www.legrand.ca

