




Specification

Thu Dec 13 10:32:05 CET 2018

SelfCookingCenter® SCC Combi-Duo Open Stacking Kit feet 6" (150 mm) 62/62 G (12 x 18 x 26 inch/24 x 12 x 20 inch)

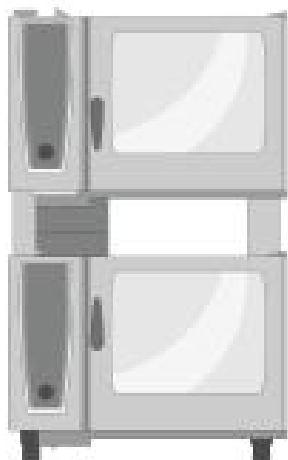

Capacity

- Twelve (12) full-size sheet pans (18"x26") or Twenty four (24) Steam table pans (12"x20"x2.5") GN1/1
- Removable, swivelling hinging rack
- Vertical distance between rails 2 5/8" (68 mm)

Standard Features

- Gas heated device for automatic cooking of meat, poultry, fish, side dishes, vegetables, egg dishes, desserts, bakery products and for automatic rethermalization
- Mixed loads with individual supervision of each rack, depending on type, load amount, and the number of door openings
- Optical rack signaling function
- LED cooking cabinet and rack lighting - energy-saving, durable and low-maintenance
- Optical rack signalling function
- Rear-ventilated triple-pane cooking cabinet door, two hinged inside panes (for easy cleaning) with a special heat-reflecting coating
- Combi-steamer according to DIN 18866, DIN 10535 for selective use of steam and hot air, separately, sequentially, or combined
- Integrated Ethernet and USB port to connect to a cloud based system for administration of cooking processes, management of HACCP and service data and remote control
- No water softening system or additional descaling is necessary
- 2-Year parts and labor warranty
- 5-Year steam generator warranty
- No-charge 4-hour RATIONAL certified chef assistance program
- Core temperature probe with 6 measuring points, including positioning aid - automatic error correction in case of incorrect positioning
- 1% - accurate regulation of moisture, adjustable, and retrievable via the control panel
- Combi-steamer mode °F/(°C): steam: 85 to 265/(30 to 130), hot air: 85 to 575/(30 to 300), combination: 85 to 575/(30 to 300)
- Individual programming of at least 1,200 cooking programs with up to 12 steps transferable via USB
- Hand shower with automatic retracting system
- Moisturising in 3 steps of °F/(°C) 85 to 500/(30 to 260)
- High-performance fresh steam generator, pressureless, with automatic filling and automatic decalcification

- Dynamic air circulation in cooking cabinet with reversing wheel fan with 5 fan speeds, programmable
- Integral, maintenance-free grease extraction system
- Single water connection as shipped, can be split connection for treated and untreated water
- Turbo fan cool down function
- Automatic adaptation to the installation location (elevation)
- Height adjustable feet +/- 3/8" (10 mm)
- 304 (DIN 1.4301) stainless steel material inside and out
- Seamless interior and with rounded corners
- Demand-related energy supply
- 5 programmable proofing stages
- Automatic, pre-selected starting time with adjustable date/time
- Delta-T cooking

Operation

- Digital, graphically supported overview of the current cooking chamber climate, review and forecast as well as repeat and change options at the end of the cooking process
- Remote control function for appliance using software and mobile app
- Control second unit from the main unit (units must be connected via ethernet or network)
- Real-time information about automatic adjustments on current cooking process
- Self-learning operation, automatically adapts to actual usage
- Intelligent energy-management system controls the energy and airflow, fully automated
- Record mode – determination of the ideal cooking process for calibrated products using the core temperature probe for subsequent use without a core temperature probe, with automatic consideration of the load quantity
- Self-configurable, user-specific operating display 8.5" TFT color monitor and touch screen with self-explanatory symbols for ease of operation
- Application and user manuals can be viewed on the unit display for the current actions

Safety features

- Detergent and Care Tabs (solid detergents) for optimum working safety
- HACCP data output and software update via the integrated Ethernet and USB port
- Safety temperature limiter for steam generator and hot-air heating
- VDE approved for unsupervised operation (e.g. overnight cooking or cleaning)
- Integral fan impeller brake
- Door handle with right/left and slam function

Combi-Duo / Stacking Kit

- Unit feet 6"/150 mm

Cleaning and Care

- Self-cleaning and care system for cooking cabinet and steam generator, regardless of the water pressure supplied
- 7 cleaning stages for unsupervised cleaning and care - even overnight
- Automatic cleaning and descaling of the steam generator
- Automatic cleaning prompts indicating the cleaning stage and volume of chemicals in relation to the level of soiling
- Soiling and care status are displayed on the monitor
- Diagnostic system with automatic service notices displayed
- Self-test function for actively checking unit's functions
- 100% biodegradable Cleaner and Care tabs

Ventilation approvals

- This appliance conforms to the EPA 202 test in accordance to the ANSI/NFPA 96 "Ventilation Control and Fire Protection of Commercial Cooking Operations" Refer to UL Listing KNLZ.E148536 (America) or KNLZ7.E148536 (Canada).

Approval/Labels





Specification

Thu Dec 13 10:32:05 CET 2018

SelfCookingCenter® SCC Combi-Duo Open Stacking Kit feet 6" (150 mm) 62/62 G (12 x 18 x 26 inch/24 x 12 x 20 inch)

ConnectedCooking



For proper usage of ConnectedCooking a network socket according to RJ45 has to be provided. For optimal performance a cable-bound connection with a data rate of at least 10 Mb/s is the preferred connection. Alternatively W-LAN connections with appropriate W-LAN adaptors can be used.

Combi-Steam mode



Steam °F/(°C) 85 to 265/(30 to 130)



Hot air °F/(°C) 85 to 575/(30 to 300)



Combi °F/(°C) 85 to 575/(30 to 300)

iCookingControl - Automatic cooking



7 application modes for meat, poultry, fish, side dishes, egg dishes, desserts, baked goods and Finishing® (rethermalization)

HiDensityControl®



Highest steam saturation, and dynamic air mixing for perfect and even cooking

Efficient CareControl



Efficient self-cleaning CareControl recognizes soiling and scale and removes it

iLevelControl



Mixed loads with individual monitoring of every rack depending on the quantity of the load as well as the number of door openings.

Technical Specification

Dimensions	Width	Depth	Height
Exterior	42 3/8" (1,075 mm)	44 5/8" (1,135 mm)	68" (1,727 mm)
Incl. Vent/Handle	-	47 3/8" (1,202 mm)	70 1/8" (1,783 mm)

Weight	
Max Per Shelf	66/66 lbs
Max Load Size	132/132 lbs
Net	746 lbs
Shipping	833 lbs

Size	Electric. 60 hz	Breaker	Cable connection	Running Amps
62/62	208V 1 PH	15A/15A	6-15P/6-15P	3.7/3.7
62/62	240V 1 PH	15A/15A	6-15P/6-15P	3.21/3.21

All gas units are supplied with 8 ft. 14-3 AWG cord and plug. Dedicated 2 pole circuit breaker required. The 208/240v gas units are 1 Ph L1, L2, G (208v is field retrofittable to 240v) and come with 6-15P. Due to GFCI having a 4-6mA tolerance, 208/240v is recommended. Do not use fuses. Special voltages available upon request. Supplied with an external data interface (splashwater proof LAN socket RJ45).

Thermal load and airflow requirements

Latent	958 W/958 W
Sensible	1236 W/1236 W
Unit free standing	26945 ft²/h/26945 ft²/h
One side against a wall	16986 ft²/h/16986 ft²/h
Noise values	70 dBA/70 dBA

Rated thermal load for each unit

	Natural gas	Liquid gas LPG
Total:	106,000/106,000 BTU	103,800/103,800 BTU
Steam:	79,500/79,500 BTU	77,800/77,800 BTU
Hot air:	106,000/106,000 BTU	103,800/103,800 BTU
Required gas pressure:	6.5" – 10" w.c.	10" – 13" w.c.

Connected load electric: 0.77 kW

Gas supply/connection: 3/4" NPT with 1" gas shut off

Water Requirements

Connection	3/4" GHT
Supply	Minimum 1/2" ID Drinking Quality Cold
Pressure	21-87 psi (1.5-6 bar)
Min/Max Flow Rate	3 gpm/6.6 gpm/3 gpm/6.6 gpm
Water Drain	2" OD (50 mm) hub

Connect only to 2" (XS = 1 1/2") high-temperature resistant pipe. Water discharge temperature can be field adjusted to meet section 701.7 of the International Plumbing Code. Contact RATIONAL for back flow recommendation.

Water Quality

Untreated water can be 0 to 24.5 gr/gal (0 to 420ppm) hardness. We do not recommend treated water hardness < 5 gr/gal (86ppm) because the water could be corrosive. Sodium ion exchangers are not recommended; H+ Ion exchange systems are recommended. Water that does not meet the following minimum standards will require the proper conditioning.

Contaminant	Water Requirements	If > than recommended
Sand/Particles	< 15 µm	Particle filter
Chlorine (Cl₂)	< 0.12 gr/gal (0.2 ppm)	Active carbon filter
Chloride (Cl₃)	< 4.68 gr/gal (80 ppm)	RO or deionization

Clearance Requirements

To facilitate servicing, we recommend leaving a 18"-20" (450-500 mm) gap on the left-hand side of the unit. If there is not 18"-20" (450-500 mm) left side clearance available, provisions for moving the unit or appliance to the left for service access must be made. These include, but are not limited to, having quick connections (water, gas, etc.) and lengthened electrical connections with flexible cords. If there are no external heat sources acting on the unit, there should be a minimum gap of 2" (50 mm) to the left, right, and back of unit. If a high temperature heat source is on the left side of the unit, the left-hand gap must be a minimum of 14" (350 mm). This gap may be reduced to 2" (50 mm) by using a heat shield (see options). Recommended clearance from unobstructed rear exhaust pipes and any surface collecting grease or flammable material; 16" (400 mm) gas, 10" (254 mm) electric. It is recommended to have a hood overhang of 6" (150 mm) to 18" (450 mm) at the front of the unit and 6" (150 mm) on the side if installed at the end of the cooking line. Please refer to the Installation Manual for further technical data and for instructions on installation and setup. Installations must comply with all local electrical, plumbing, and ventilation codes.

RATIONAL USA Inc.

1701 Golf Road, Suite C-120, Commerce
Rolling Meadows, IL 60008
Toll Free: 888-320-7274, Fax.: 847-755-9583

Visit us on the internet: www.rationalusa.com


We reserve the right to make technical improvements



Specification

Thu Dec 13 10:32:05 CET 2018

SelfCookingCenter® SCC Combi-Duo Open Stacking Kit feet 6" (150 mm)
62/62 G (12 x 18 x 26 inch/24 x 12 x 20 inch)

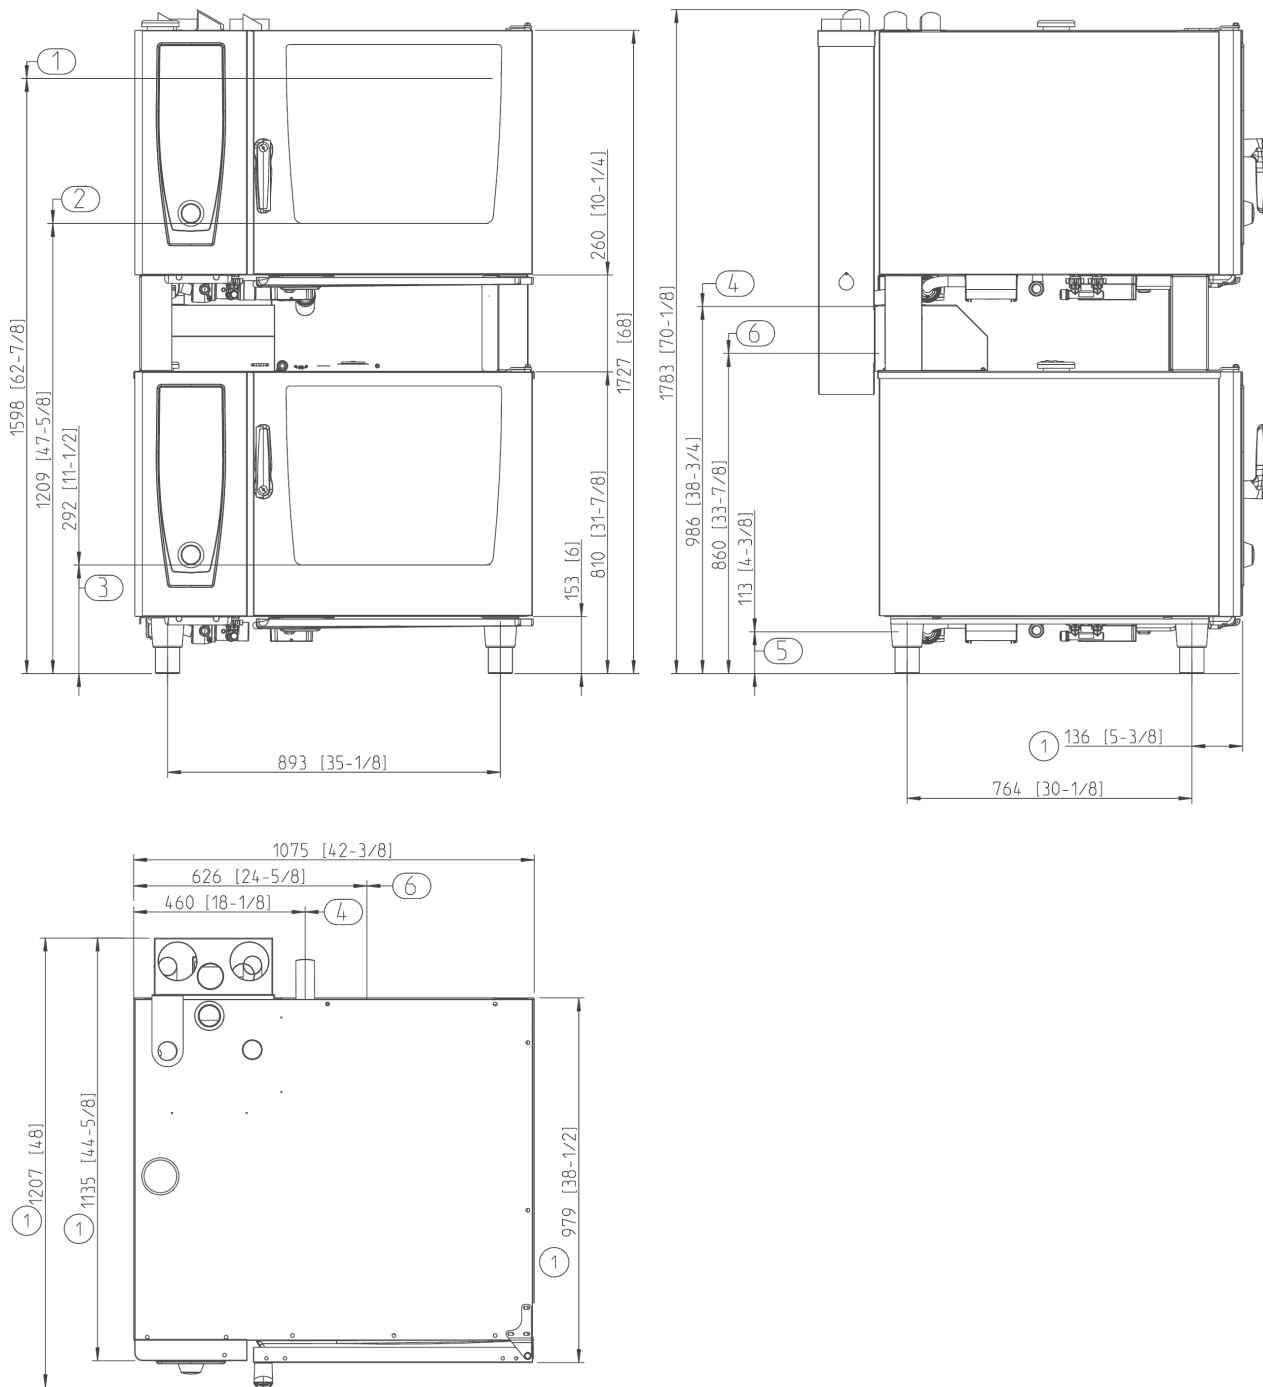

1. Upper rack 2. Run-in rail top 3. Run-in rail bottom 4. Water drain top 5. Water drain bottom



Specification

Thu Dec 13 10:32:05 CET 2018

SelfCookingCenter® SCC Combi-Duo Open Stacking Kit feet 6" (150 mm) 62/62 G (12 x 18 x 26 inch/24 x 12 x 20 inch)

GAS OPTIONS

- ☐ Natural Gas
- ☐ Liquid Propane Gas (LPG)

ELECTRICAL CONNECTION ON GAS UNITS (all 60Hz) Special voltages available upon request

Voltage / breaker / running amps /

- ☐ 208V 1 Ph / 15 / 3.7 / comes with 6-15P cord and plug -field retrofittable to 240 V
- ☐ 240V 1 Ph / 15 / 3.21 / comes with 6-15P cord and plug

ACCESSORIES

- ☐ Installation Kits – include quick disconnect gas, water and drainage connection **1 needed for each unit**
 - ☐ Gas 208-240 V/60/1 Ph 8720.1560US
- ☐ RATIONAL Cleaner Tabs without phosphorous – guarantee maximum cleaning power 56.00.210A
- ☐ RATIONAL Care Tabs – prevents scale deposits 56.00.562
- ☐ Certified installation by RATIONAL SERVICE-PARTNERS See document
- ☐ RATIONAL Single Water Filter- for all single models and Combi-Duo XS/XS, 61/61 and 61/101 1900.1154US
- ☐ RATIONAL Double Water Filter- for Combi-Duo 62/62 and 62/102 or if used for more than 2 units 1900.1150US
- ☐ 62 Preventative Maintenance Kits – door gaskets, air filters, interior light gasket, and light bulbs 87.00.521US
- ☐ Mobile oven racks and Finishing® plate racks – easier operation of full loads See accessories brochure
- ☐ Run-in rail for mobile oven and plate racks 60.62.094
- ☐ Transport trolley for mobile oven and plate racks – standard and height adjustable See accessories brochure
- ☐ Heat shield –for top unit for installation next to heat source (e.g. range, grill) 60.70.392
- ☐ Condensation breaker – to divert steam from the top unit into existing hood system 60.72.591
- ☐ RATIONAL USB data-memory stick – for transferring cooking programs and HACCP data 42.00.162
- ☐ VarioSmoker – for a large variety of smoked products 60.73.010
- ☐ For ideal grilling, baking, roasting, frying, rotisserie, steaming, Finishing®, and much more See accessories brochure

FACTORY INSTALLED OPTIONS (special order)

- ☐ Left-hinged door natural gas
- ☐ Left-hinged door liquid gas (LPG)
- ☐ Door safety lock – handle is turned left then right before the door can be opened
- ☐ Sous-Vide core temperature probe, includes core temperature probe (both attach externally)
- ☐ Externally attached standard core temperature probe
- ☐ 3 Core temperature probes for iLevelControl includes core temperature probe (both attach externally)
- ☐ Lockable control panel cover
- ☐ Control panel protection
- ☐ Mobile oven rack package (mobile oven rack + run-in rail)
- ☐ Unit with special hinging racks for bakeries and supermarkets
- ☐ Integrated fat drain
- ☐ Security version