




Dependable Gas Analysis Solutions

580 SERIES

AMBIENT AIR ALARM MONITOR FOR CARBON MONOXIDE

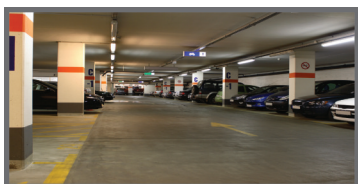

APPLICATIONS

Designed to monitor carbon monoxide (CO) in underground parking garages, service garages, around steel making furnaces, breathing air, or any other area where CO may be present.

FEATURES

- Fast response to the presence of CO
- Instant warm up, no wait
- Bright digital readout
- Easy use and calibrate
- Modular layout that is easy to maintain
- 4-20mA output signal for recording
- NEMA 12 dust-tight enclosure

OPTIONS

- Low range version for breathing air supplies
- CO alarm with relay contact and 'Sonalert' audible alarm with 'Acknowledge' button
- Low flow alarm
- NEMA 4 weather-proof enclosure
- Bright red strobe light for visible alarming

CALIBRATION


- On N₂ for zero
- Analyzed calibration gas of CO in N₂ for span



580P - Pump Style in NEMA 12 Enclosure
(models shown with optional strobe light)



580DR1 - Alarm Unit and Single Diffusion-Style Sensor in Separate Enclosures

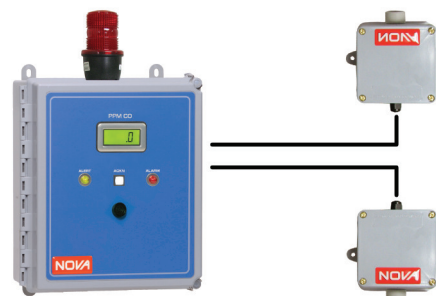

580DR2 - Alarm Unit and Dual Diffusion-Style Sensors in Separate Enclosures

NOVA ANALYTICAL SYSTEMS

www.nova-gas.com

DESCRIPTION

The Nova 580 Series carbon monoxide (CO) alarm monitors are designed for the continuous detection of CO in ambient air. The CO sensor is capable of excursions over 1000 PPM with no damage. The CO sensor is of the disposable electrochemical type with an expected life of between 3-4 years. The sensor needs no warm up time and is ready to go as soon as the monitor is turned on.

MODELS

- 580D - one diffusion-type sensor in main cabinet
- 580DR1 - one diffusion sensor remote from main cabinet
- 580DR2 - two remote diffusion sensors
- 580DR3 - three remote diffusion sensors
- 580DR4 - four remote diffusion sensors
- 580P - built-in sample pump to draw in sample from another location
- 580BA - Breathing Air Monitor for compressed air lines with pressure regulator and a special 0-50 PPM low range CO sensor

SPECIFICATIONS

Nova reserves the right to specification changes which may occur with advances in design without prior notice.

Method of Detection:	Customer replaceable electrochemical CO sensor. Life expectancy is 3-4 years	
Ranges Available:	0-200 PPM standard on all models except 580BA which has a 0-50 PPM sensor	
Resolution:	1 PPM CO	
Accuracy and Repeatability:	Better than 1% of full scale	
Drift:	Less than 1% of full scale per week	
Response Time (T-90):	Less than 15 seconds to 90% step change	
Ambient Temperature Range:	32° to 120°F (0° to 40°C), 0-90% non condensing	
Linearity:	± 1% of full scale	
Size and Weight:	12" H x 10" W x 7" D @ 12lbs. (30 x 25 x 17 cm @ 5.4kg)	- may vary slightly depending on model and options selected.
Power:	115VAC 60Hz (220VAC 50Hz available)	
Output Options:	0-1VDC or 4-20mA	
Alarms:	Optional High and/or Low alarm with SPDT contacts with 10A 115VAC rating, audible alarm with reset button, and indicator light for each alarm level; optional Low Flow alarm and strobe light also available.	

UNIQUE APPLICATIONS

The 580 Series is not suitable for process or flue gas CO analysis. All Nova analyzers are built using proven technologies and techniques. If this product does not suit your application, please contact Nova at 1-800-295-3771. In many cases, we are able to build an analyzer specific to your needs.



NOVA ANALYTICAL SYSTEMS
A UNIT OF TENOVA GOODFELLOW INC.

IN USA:
1925 Pine Avenue • Niagara Falls, NY • 14301
Tel: 1-800-295-3771 • 716.285.0418 • Fax: 716.282.2937
IN CANADA:
270 Sherman Avenue North • Hamilton, ON • L8L 6N5
Tel: 905.545.2003 • Fax: 905.545.4248
email: sales@nova-gas.com
websales@nova-gas.com



www.nova-gas.com