


Family of antennas AD-25/C is intended for use with portable and manpack radios with integrated antenna tuners within VHF frequency band. The antenna radiator is composed of several multilayered tapes connected together to ensure good conductivity, flexibility and robust construction. Complete radiator is covered with plastic sleeve. The antenna comes with a velcro tape for storage when not in use.



Version of AD-25/C-GN includes a special "goose-neck" which enables vertical position of the antenna regardless of the radio position. Antenna is available in different heights from 760 to 1300 mm and with different types of thread connectors (M8 as standard or by request).

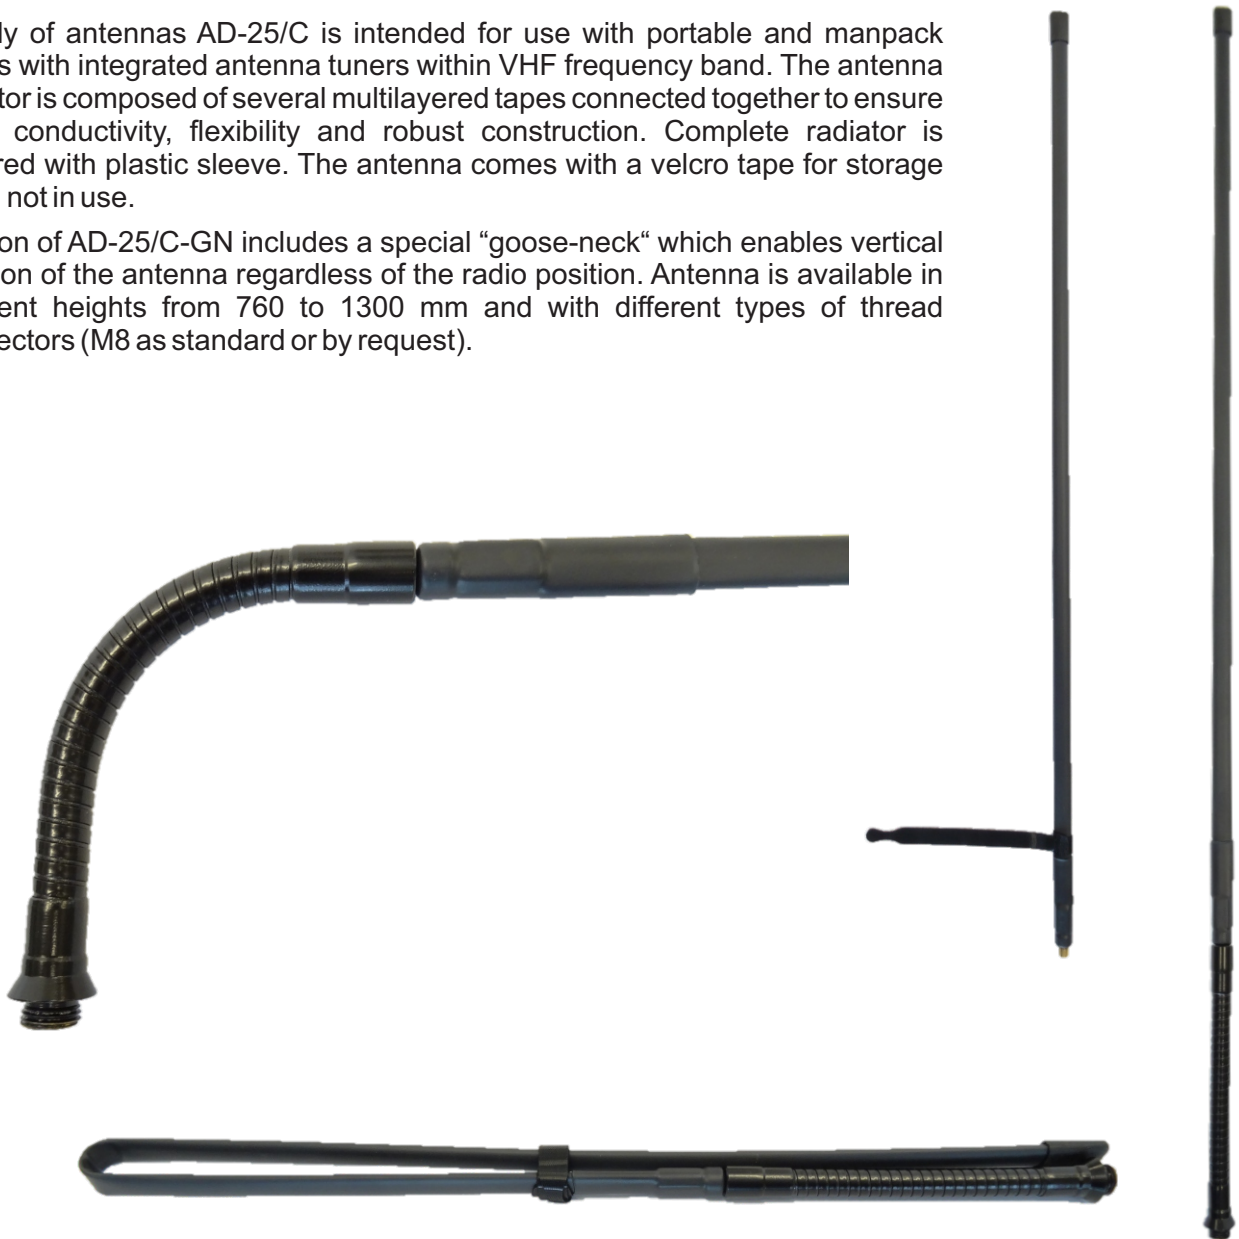

<b>Radiator only</b>	AD-25/C-760-M8	AD-25/C-920-M8	AD-25/C-1060-M8	AD-25/C-1300-M8
Frequency range	30 - 90 (108) MHz	30 - 90 (108) MHz	30 - 90 (108) MHz	30 - 90 (108) MHz
Connector	M8 (or by request)	M8 (or by request)	M8 (or by request)	M8 (or by request)
Height	760 mm	920 mm	1060 mm	1300 mm
Weight	0,10 kg	0,12 kg	0,13 kg	0,17 kg
Temperature range	- 40....+70 °C	- 40....+70 °C	- 40....+70 °C	- 40....+70 °C

<b>With goose-neck</b>	AD-25/C-GN-925-M8	AD-25/C-GN-1080-M8	AD-25/C-GN-1240-M8	AD-25/C-GN-1480-M8
Frequency range	30 - 90 (108) MHz	30 - 90 (108) MHz	30 - 90 (108) MHz	30 - 90 (108) MHz
Connector	M8 (or by request)	M8 (or by request)	M8 (or by request)	M8 (or by request)
Height	940 mm	1100 mm	1240 mm	1480 mm
Weight	0,23 kg	0,25 kg	0,26 kg	0,30 kg
Temperature range	- 40....+70 °C	- 40....+70 °C	- 40....+70 °C	- 40....+70 °C

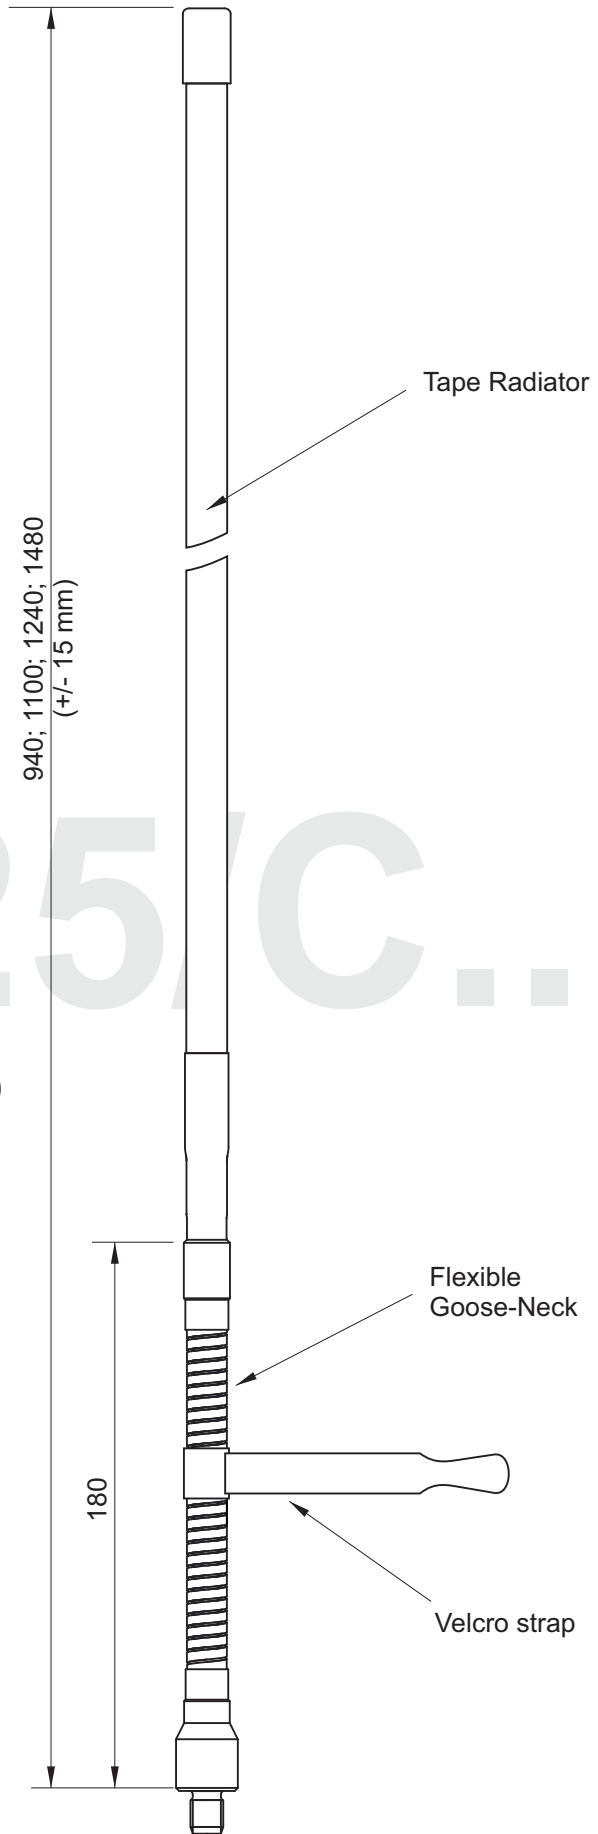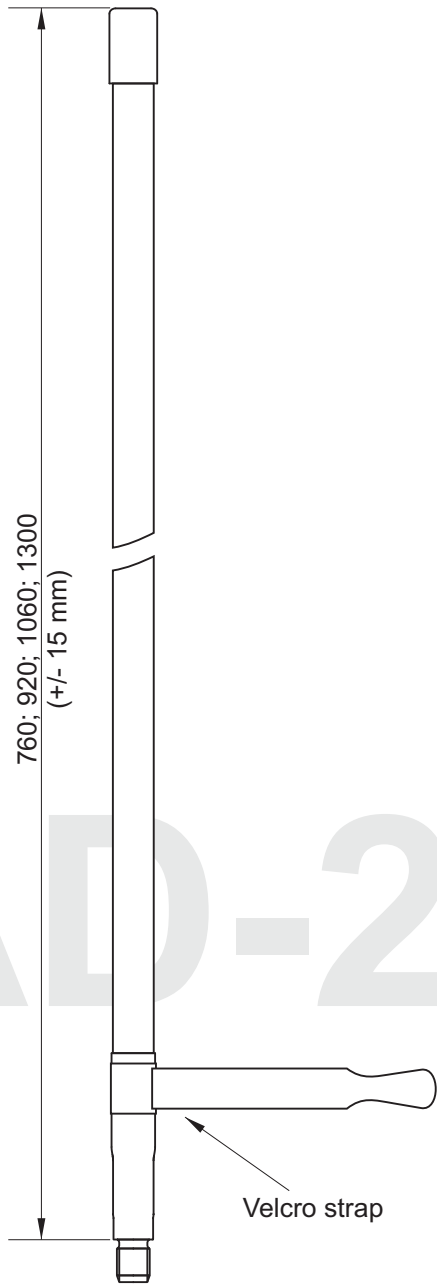

ADD-25/C...

**AUTHORIZED USA  
DISTRIBUTION BY:**

Cyntony Corporation  
195 Follen Road  
Lexington, Massachusetts  
sales@cyntony.com  
781-430-0675

**cyntony**  
customer attuned