

# High-Power Omni-Directional Antenna

2 – 6 GHz

Product Code: OMNI-A0116

VERSION: 1.4



## SPECIFICATIONS:

<b>Electrical:</b>	
Frequency range	2 – 6 GHz
VSWR	< 2.5:1
Nominal input impedance	50 Ω
Feed power handling	50 W
Gain (free space)	1 dBi
Polarisation	Vertical
Connector	N-type female
<b>Mechanical:</b>	
Dimensions (length x antenna diameter)	400 mm x 40 mm
Base diameter	135 mm
Material	Aluminium, stainless steel, Fibreglass
Total mass	700 g
Mounting	4-hole and 6-hole NATO
<b>Environmental: designed to meet the following specifications</b>	
Wind survival	160 km/h
Temperature range	- 30 °C to + 65 °C (no icing)
Water and dust resistance	MIL-STD-820F (506.4)
Corrosion	Appropriate anti-corrosion measures are taken in the design of antenna for harsh environmental conditions

## PRODUCT DESCRIPTION:

This omni-directional dipole antenna is primarily designed for high-power applications. It covers a frequency band of 2 to 6 GHz with an average gain of 1 dBi.

## RELATED PRODUCTS:

Alaris also manufactures a manpack version of this antenna, the DIPL-A0059, for mounting directly on an N-type connector.

## PRODUCT FEATURES:

- Wideband frequency 2 to 6 GHz
- VSWR < 2.5:1
- Omni-directional
- 50 W power handling
- Rugged construction

## PRODUCT APPLICATIONS:

- Wideband interception
- Covers the 3.5 and 5.8 GHz Wi-Fi frequency bands


# High-Power Omni-Directional Antenna

2 – 6 GHz


Product Code: OMNI-A0116

VERSION: 1.4

## VSWR:

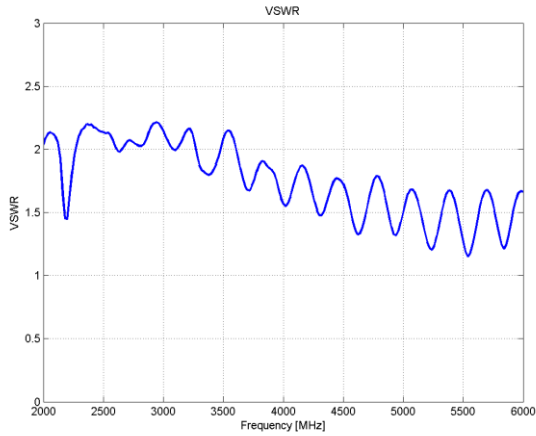

## Gain:

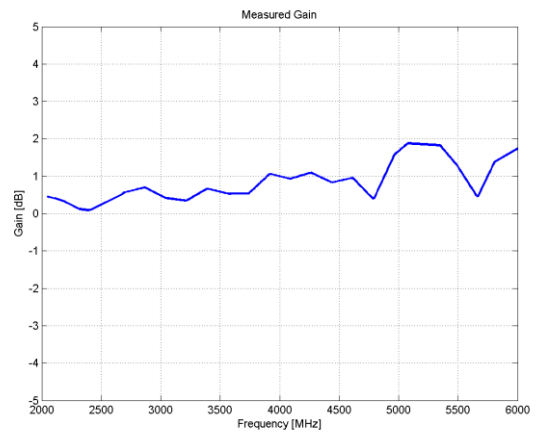

## Normalised radiation pattern:

