

# Wideband LPDA Antenna

1000 – 3000 MHz

Product Code: LPDA-A0032

VERSION: 2.7

## SPECIFICATIONS:



<b>Electrical:</b>	
Frequency range	1000 – 3000 MHz
VSWR	< 2:1
Nominal input impedance	50 Ω
Connector	7/16 female
Feed power handling	300 W
Gain	9 dBi typical
Polarisation	Linear (vertical and horizontal)
<b>Mechanical:</b>	
Dimensions (d x l)	170 mm x 700 mm
Weight	4 kg
Material	Stainless steel, plastic and fibreglass
MTBF	75000 hours
<b>Environmental: designed to meet the following specifications</b>	
Wind survival	160 km/h calculated
Temperature (operational)	-30 °C to +65 °C (no icing)
Water and dust resistance	IP65

## ELECTRICAL FEATURES:

- High feed power handling of 300 W
- Low VSWR
- High gain over the band
- Rugged design

## APPLICATIONS:

- Wideband monitoring
- High-power transmissions

## PRODUCT DESCRIPTION

This LPDA is a directional log-periodic dipole array that is primarily designed for high-powered transmit applications. It covers the frequency band of 1000 to 3000 MHz at 300 W of power, with a typical gain of 9 dBi.

The antenna is easily mounted at the rear for either vertical or horizontal polarisation.

This antenna can be customised if required, for different frequency ranges.

# Wideband LPDA Antenna


1000 – 3000 MHz

Product Code: LPDA-A0032


VERSION: 2.7

## VSWR AND GAIN GRAPHS:

### TYPICAL VSWR:

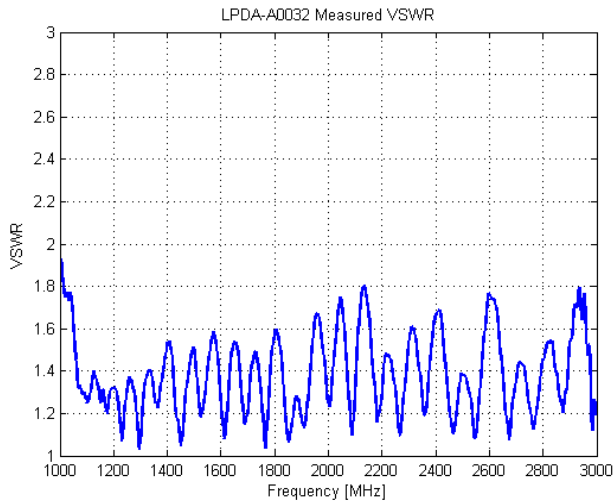


### GAIN:

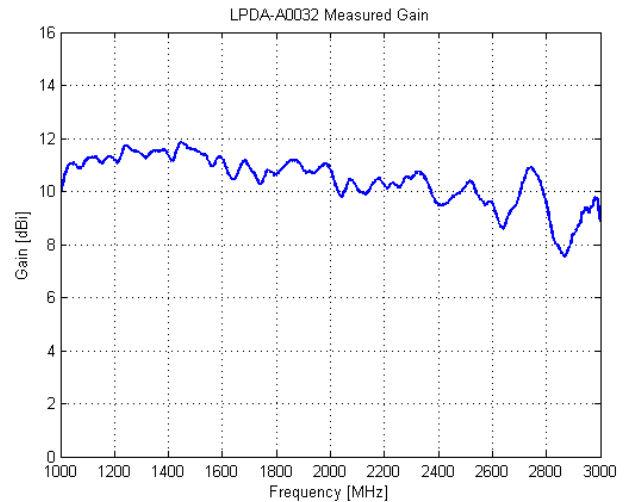

## RADIATION PATTERNS:

### E-PLANE PATTERN:

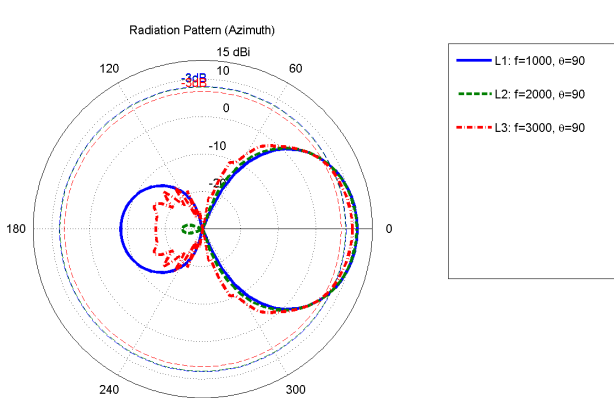

### H-PLANE PATTERN:

